

PRODUCT AND SERVICE GUIDE

EFFECTIVE MARCH 2024

Supersedes October 2020

BRISBANE

Ph 07 3803 999

sales.crestmead@stramit.com.au

MARYBOROUGH

Ph 07 4123 9500

maryboroughsales@stramit.com.au

ROCKHAMPTON

Ph 07 4921 5600

sales.rockhampton@stramit.com.au

CONTACT US

How can we help you?

Customer Service, Sales and all General Enquiries

To place an order, request a quote, or receive tailored customer support, please contact your local branch.

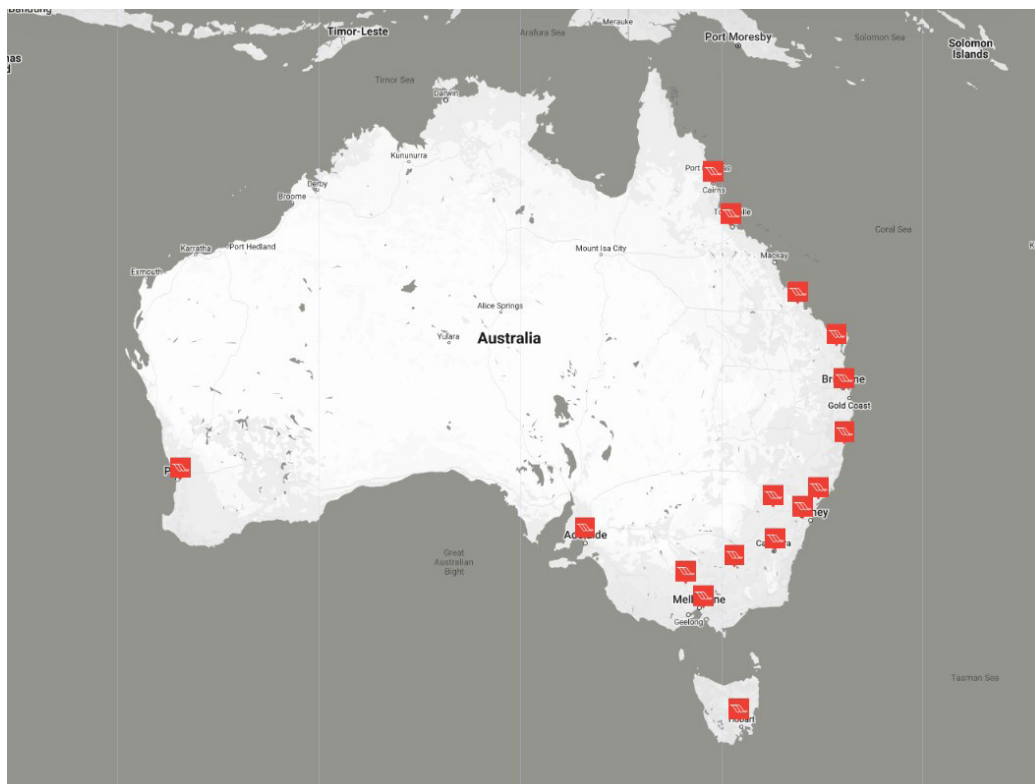
Check the locations page opposite for the phone number and address of your nearest Stramit branch.

For general enquiries, email contactus@stramit.com.au

For order enquiries, email orders@stramit.com.au

Technical Services

For specification and technical support, email techsupport@stramit.com.au



SERVICE LOCATIONS

The Stramit web page can be found at **stramit.com.au**.

Details of many Stramit® products can also be seen on the AIA site

'Product Selector' **selector.com.au** or **SteelSelect.com.au**.

			ORDER CUT-OFF TIMES ²		
REGION	LOCATION	CONTACT DETAILS	STANDARD DELIVERY	SHED BUNDLE LEAD TIME ³	PICK-UP HOURS ⁴
NSW & ACT	SYDNEY 33-83 Quarry Rd, Erskine Park NSW 2759	Ph 02 9834 0909	4pm	21 Days	7am - 4pm
	CANBERRA 4 Bass St, Queanbeyan NSW 2620	Ph 02 6298 2500	4pm	21 Days	7am - 4pm
	COFFS HARBOUR 6 Mansbridge Dr, Coffs Harbour NSW 2450	Ph 02 6656 3800	4pm	21 Days	7am - 4pm
	NEWCASTLE TBA	Ph 02 4041 3400	4pm	21 Days	N/A
	ORANGE 51 Leewood Dr, Orange NSW 2800	Ph 02 6360 9200	4pm	21 Days	7am - 4pm
VIC	MELBOURNE 3/1464 Ferntree Gully Rd, Knoxfield VIC 3180	Ph 03 9237 6300	4pm	12.30pm	7am - 4pm
	ALBURY 18 Ariel Dr, Albury NSW 2640	Ph 02 6092 3700	4pm	21 Days	7am - 4pm
	BENDIGO Lot 7-9 Ramsay Court, Kangaroo Flat VIC 3555	Ph 03 5448 6400	4pm	21 Days	7am - 4pm
TAS	HOBART 57 Crooked Billett Dr, Brighton TAS 7030	Ph 03 6262 8788	4pm	21 Days	7am - 4pm
SA	ADELAIDE 11 Stock Rd, Cavan SA 5094	Ph 08 8219 20001	4pm	21 Days	7am - 4pm
South QLD	BRISBANE 57-71 Platinum St, Crestmead QLD 4132	Ph 07 3803 9999	4pm	12.30pm	7am - 4pm
	MARYBOROUGH 10 Activity St, Maryborough QLD 4650	Ph 07 4123 9500	4pm	21 Days	7am - 4pm
	ROCKHAMPTON 41 Johnson St, Parkhurst QLD 4702	Ph 07 4921 5600	4pm	21 Days	7am - 4pm
North QLD	CAIRNS 53 Vickers St, Edmonton QLD 4869	Ph 07 4034 6555	4pm	21 Days	7am - 4pm
	TOWNSVILLE 402-408 Bayswater Rd, Garbutt QLD 4814	Ph 07 4412 3900	4pm	21 Days	7am - 4pm
WA	PERTH 605-615 Bickley Rd, Maddington WA 6109	Ph 08 9493 8800	4pm	12.30pm	7am - 4pm

¹ Business days only (excludes weekend and public holidays).

² Days only (excludes weekend and public holidays). Standard 48hr Delivery refers to order cut-off times for standard lead-time products as defined in our Product and Services Guide. Please be aware that some products have minimum lead times that may exceed these lead times. Please check the product listing in our Product and Services Guide or check with your local branch when placing order.

Additional charges may apply. Check with your local branch for capacity when ordering.

Our service proposition is based around available manufacturing capacity on any given day. Demand can fluctuate and impact lead times. Please check with your local branch when placing your order.

This Service Offer excludes large orders related to Commercial projects or Consolidated Shed orders.

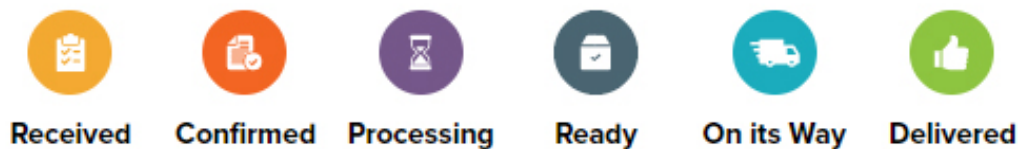
* Registered trademarks of Stramit Corporation Pty Limited. ABN 57 005 010 195 trading as Stramit Building Products. A member of the Fletcher Building Group. TRUECORE®, COLORBOND®, ZINCALUME® and * colour names are registered trade marks of BlueScope Steel Limited.™ colour names are trade marks of BlueScope Steel Limited. ABN 16 000 011 058. © Stramit Corporation Pty Limited. This information is accurate at March 2024.

This document replaces all previous issues. Please destroy, or clearly mark as superseded, all previous issues. STR065_MAR24.

CUSTOMER PORTAL

Keeping up to date with your order, made simple.

Our secure Customer Portal gives you access to the status of your orders whenever, and wherever, you need an update. The portal lets you track your orders live, from the time our Customer Service team enters it, through processing and manufacturing, while it's being picked and packed and when it's out for delivery to you.



As an account customer, our portal allows you to:

- Track your order in real time
- Search current and historical orders to see related information
- Download your order confirmations
- See order details in granular detail
- Download Proof of Delivery (PODs)
- View Estimated Time of Arrivals (ET As) for your deliveries
- See when an order is Ready to Pick Up
- Share the order tracking with another party, e.g. an installer or end customer

Designed to make doing business easier with Stramit, the Customer Portal is available on any internet connected device and only requires registration - no downloads needed.

Register your interest today at:

<https://www.stramit.com.au/resources/design-software/stramit-customer-portal/>

ORDERING

For Trade and Account Customers seeking takeoffs and quotes, please send drawings and information to: takeoffs@stramit.com.au

Please contact and email all your orders through to your local branch.

For Purl in Orders, please also send through your drawings and NC Files to your local branch to aid in order accuracy.

For Flashings Orders, we require drawings to ensure accurate manufacturing of your products. Please email your drawings through when placing your order. You can find our Flashing Order Form on our website under **Resources**.

All products manufactured or purchased specifically to your requirements cannot be returned. Stock items may be returned for credit, although restocking fees will apply.

For Order Pickups, please refer to our Loading Requirements Guide on our website under **Resources**.

INDEX

PRODUCTS AND SERVICE GUIDE

Selecting Your Product (Cover, Spans & Pitch)	2
Product Availability (Roofing & Cladding) - Thickness & Colour	3
Product Availability (Rainwater) - Thickness & Colour	4
Production Days Crestmead	5
Standard Delivery Charges	6
Delivery Information / Maryborough & Rockhampton Schedule	7
Brisbane Metropolitan & Country Area Delivery Schedule	8
Loading Requirements	9-10
Quick Roofing Estimate	11-12

ROOFING/CLADDING

Stramit® Corrugated	13
Stramit Monoclad®	14
Stramit Longspan®	15
Stramit Speed Deck Ultra®	16
Accessories (Farlap, Fibreglass Sheeting, Clips & Fasteners)	16
Stramit CapacityPLUS™ 660	17
Stramit Capacity Plus & Acoustic Products	17
Stramit® Curving Quality, Stramit® C-Clad 280, Premier 300	18
Stramit K-Panel®, Stramit Minirib®	19
Stramit Mini Corry®	19
Stramit SharpLine®	20
COLORBOND® steel, ZINCALUME® steel Care and Maintenance	21
Tank Iron	22
Accessories (Touch-Up Paint, Silicone & Rotary Vents, Roof Racks)	23
Fasteners – Cyclonic Areas	24-25

INSULATING PRODUCTS

Sisalation, Reflective Insulation	26
Building Blanket, Batts, Wire	27

VALLEYS, RIDGES, EDGE ROLL & METAL FASCIA

Stramit® Valley, Ridges, Edge Roll	28
Stramit Metal Fascia, Accessories	29

GUTTERS & DOWNPIPES

Stramit® Queensland Quad®, Stramit Compact	30
Stramit® M Pattern, M Pattern Barge, S Pattern	31
Stramit® Quad 150	32
Stramit® Quad 175	33
Stramit® Quad 100, 125	34
Stramit Flatback & Half Round Gutter 150, Accessories	35
Half Round Gutter 200, Accessories	37
Stramit® Downpipe - Roll Formed & Accessories	38
Stramit® Downpipe - Custom Made	39
Stramit® Downpipe - Accessories	40

STANDARD FLASHINGS

Stramit® Custom Flashings – Ordering Procedure	41
Stramit® Custom Flashings	42-47
Stramit® Custom Flashings – Order Detail Sheet	48

PREMIUM PRODUCTS

Product Availability (Matt, Ultra & Metallic) - Thickness & Colour	49
COLORBOND® steel	50
Stramit® Roofing, Cladding, Valleys, Ridges	51
Stramit® Fascia, Gutters	52
Stramit® Custom Flashings	53-56
Stramit® MagnaFlow® – Roofing, Cladding, Rainwater	57

NON-STANDARD RAINWATER & FLASHINGS

Rainwater Head Guide	58
Sumps, Adjustable Box Gutters Brackets, Rainwater Caps	60
Damp Course Liners (Shower Trays), Safe Trays	61
Rainwater Specials	61
Vented Ridge, Fixed Metal Louvres	62
Colonial Window Awnings	63

BUILDER'S PRODUCTS

Stump Caps, Ant Caps, Vent Pipe Stays, Drip Strip, Window Flashings	64
Sparrow Proofing, Metal Surrounds, Builders Strapping, Trim Angle, PA Doors	65

STRUCTURAL COMPONENTS

Stramit Steel Framing Sections, Stramit Top Hats, Stramit Roof Battens, Stramit Ceiling Battens	66
Stramit Condeck HP®, Stramit® Edgeforma	67
Stramit Uniguard™ Fire Resisting Wall System	68
Stramit® Flooring, Vermaseal	69
Stramit® C & Z Purlins (Z350 Coating), Stramit® Eave Purlins	70
Stramit® Purlin Bridging Hole Punching	71
C & Z Purlins - Downturn Lip	72
Stramit® Purlins & Girts AISC Bridging System	73-74
Stramit® Purlins & Girts General Accessories	75-76
Stramit Purlins Stock Sizes	77
ZAM High Durability Purlins	78-79
Stramit® C & Z Purlins (ZAM Coating)	80
Stramit® Purlins & Girts	
ISC Bridging System (ZAM Coating)	81-82
Stramit® Purlins & Girts Accessories (Zam Coating)	83

STRAMIT HOME IMPROVEMENT PRODUCTS

Stramit Fencing & Accessories	84
Stramit Sunset® Patio Deck,	85
Stramit Standard Patio Deck, Accessories	86

ROLLER DOORS AND ACCESSORIES

Residential and Light Industrial Roller Doors	87
Residential Roller Doors	88
Residential Sectional Doors	89
Residential Sectional Door Installation	90
Novataur Residential, Commercial Roller Doors & Personal Access (PA) Doors	91
Roller Door Accessories	92
Roller Door Product Warranty	93

GENERAL ORDER INFORMATION

Stramit Sales Order Form	94
Site Delivery Instruction Form	96
Stramit® Purlins & Girts Order Form	97
Stramit® Accessories Order Form	98
Stramit® Bridging Order Forms	99

TERMS AND CONDITIONS OF SALE 100-103

Prices in this Product & Service Guide DO NOT include GST.

**NOTE: Technical details displayed in this book are a guide only.
For further information, please consult the relevant Stramit Technical Manual.**
















BRISBANE
TEL (07) 3803 9999

MARYBOROUGH
TEL (07) 4123 9500

ROCKHAMPTON
TEL (07) 4921 5600

SELECTING YOUR PRODUCT

Product Roofing/Cladding	Page	BMT mm	TCT mm	Cover Width	Weight kg/m²	Minimum Pitch	Roof Span*		Wall Span*		
							Int Span mm	End Span mm	Int Span mm	End Span mm	
 Stramit® Corrugated	13	0.42 0.48	0.47 0.53	762	4.35 4.93	5 Degrees (1 in 12)	1200 1600	1000 1300	2350 2450	1950 2050	
Fixing Screws required = 3/sheet/batten											
 Stramit Monoclad®	14	0.35 0.42 0.48	0.40 0.47 0.53	762	3.59 4.35 4.93	2 Degrees (1 in 30)	- 1700 2300	- 1400 1900	3000 3000 3000	2500 2500 2500	
Fixing Screws required = 4/sheet/batten											
 Stramit Longspan®	15	0.42 0.48	0.47 0.53	700	4.73 5.37	3 Degrees (1 in 20)	2100 2700	1750 2250	3000 3000	2500 2500	
2 degree minimum pitch residential only Fixing Screws required = 4/sheet/batten											
 Stramit Speed Deck Ultra®	16	0.42 0.48	0.47 0.53	700	4.73 5.41	1 Degrees (1 in 60)	2100 2700	1750 2250	3000 3000	2500 2500	
 Stramit CapacityPLUS™ 660	17	0.42 0.48	0.47 0.53	660	4.97 5.64	1 Degrees (1 in 60)	3150 3700	2500 2950	3800 4300	3000 3400	
Fixing Screws required = 3/sheet/batten											
 Stramit® Curving Quality	18	0.60	0.65	762	6.09	5 Degrees (1 in 12)	1200	1000	2400	2000	
Fixing Screws required = 3/sheet/batten											
 Stramit® C-Clad 280	18	0.55	0.60†	280	5.66	Walls only	-	-	1700	1400	
Fixing Screws required = 1/sheet/batten											
 Stramit® Premier 300	18	0.55	0.60†	300	6.03	Walls only	-	-	2150	1750	
Fixing Screws required = 1/sheet/batten											
 Stramit K-Panel®	19	0.35 0.42	0.40† 0.47†	864 864	3.17 3.84	Walls only -	- -	- -	1500 1700	1250 1400	
Fixing Screws required = 4/sheet/batten											
 Stramit Minirib®	19	0.35 0.42	0.40† 0.47†	900 900	2.799 3.68	Walls only Walls only	- -	- -	- 1200	- 1000	
Fixing Screws required = 4/sheet/batten											
 Stramit Mini Corry®	19	0.42	0.47†	825	4.01	Walls only	-	-	1200	1000	
Fixing Screws required = 7/sheet/batten											
 Stramit SharpLine® Direct Fix - 25mm	20	0.55	0.60	290	6.14	3 Degree	900	600	1200	950	
		0.55	0.60	490	5.45	3 Degree	450	350	600	450	
		- 38mm	0.55	0.60	265	6.72	3 Degree	900	600	1200	950
			0.55	0.60	465	5.74	3 Degree	450	350	600	450
Fixing screws required = 1/sheet/batten (1 in 20)											
 Stramit SharpLine® Clip Fix - 25mm	20	0.55	0.60	320	5.56	3 Degree	900	600	1200	950	
		0.55	0.60	520	5.13	3 Degree	450	350	600	450	
		- 38mm	0.55	0.60	285	6.25	3 Degree	900	600	1200	950
			0.55	0.60	485	5.50	3 Degree	450	350	600	450
Fixing screws required = 2 per clip for both metal & timber (1 in 20)											

TCT = Total Coated Thickness. This is a nominal dimension. It should not be used in specifications due to variances in Coating and paint finish.
BMT = Base Metal Thickness. This is thickness of steel only and together with minimum yield strength and rolled profile provides the basis for calculation of the structural needs of a system. It should be referred to in specifications followed by the letters BMT.

† NOT suitable for roofing.

* For N2 Wind Condition and Normal Duty Foot Traffic. Seek further technical advice for cyclonic regions.

Masses are for COLORBOND® steel



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

ROOFING/CLADDING PRODUCT AVAILABILITY

Product/Roofing/Cladding	BMT	ZA	GA	BAS	CLC	COV	CTG	DOC	DUN	EVH	GLY	IST	JAS	MGV	MNR	MON	NTS	PPB	PEC	SHG	SUR	TRN	WLB	WDG	WSP	DSUR	DCLC
Stramit® Corrugated	0.42	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	0.48	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Stramit® Curving Quality	0.60	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Stramit Monoclad®	0.35	✓			✓		✓	✓	✓	✓		✓	✓					✓	✓	✓	✓				✓		
	0.42	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	0.48	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Stramit Longspan®	0.42	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	0.48	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Stramit® Speed Deck	0.42	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	0.48	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Stramit CapacityPLUS™ 660	0.42	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
	0.48	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Stramit Mini Corry®	0.42	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Stramit Minirib®	0.35	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓		✓		
	0.42	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit SharpLine® Direct Fix	0.55			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
	0.55			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Stramit K-Panel®	0.35	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓		✓		
	0.42	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® C-Clad 280	0.55	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Stramit® Premier 300	0.55	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Product/Roofing/Cladding	BMT	ZA	GA	BAS	CLC	COV	CTG	DOC	DUN	EVH	GLY	IST	JAS	MGV	MNR	MON	NTS	PPB	PEC	SHG	SUR	TRN	WLB	WDG	WSP	DSUR	DCLC

✓ Product Available - Check relevant section of Product & Service Guide for Stock & Lead Time.

NOTE: 0.48 Bmt - Please check availability for large quantities.

ABBREVIATION CODE AND COLOUR NAMES

BMT	Base Metal Thickness	DOC	Deep Ocean®	NTS	Night Sky®
TCT	Total Coated Thickness	DUN	Dune®	PEC	Pale Eucalypt®
ZA	ZINCALUME® steel	EVH	Evening Haze®	PPB	Paperbark®
COL	COLORBOND® steel	GLY	Gully®	SHG	Shale Grey™
GA	Galvanised	IST	Ironstone®	SUR	Surfmist®
BAS	Basalt®	JAS	Jasper®	TRN	Terrain®
CLC	Classic Cream™	MGV	Mangrove®	WLB	Wallaby®
CTG	Cottage Green®	MNR	Manor Red®	WDG	Woodland Grey®
COV	Cove®	MON	Monument®	WSP	Windspray®



BRISBANE
TEL (07) 3803 9999

MARYBOROUGH
TEL (07) 4123 9500

ROCKHAMPTON
TEL (07) 4921 5600

RAINWATER PRODUCT AVAILABILITY

Product/Rainwater	BMT	ZA	GA	BAS	CLC	COV	CTG	DOC	DUN	EVH	GLY	IST	JAS	MGV	MNR	MON	NTS	PPB	PEC	SHG	SUR	TRN	WLB	WDG	WSP
Stramit® Fascia	0.42	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Valley Ribbed 450 (Rolled)	0.40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Valley 400 (Rolled)	0.40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Valley 450 (Folded)	0.40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Roll Top Ridge 400	0.40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Roll Top Ridge 450	0.40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Ridge Cap (3 Break)	0.40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Edge Roll 38mm 1.8m	0.40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Edge Roll 50mm 2m	0.40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Edge Roll 50mm 3m	0.40	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Roll Top Barge Cap	0.40	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® M Pattern	0.42	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® S Pattern	0.42	✓			✓		✓	✓	✓			✓			✓	✓	✓	✓	✓	✓	✓			✓	✓
Stramit® 200 Half Round (Plain only)	0.55	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® QLD Slotted Quad	0.42	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Compact	0.42	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Quad 100 1.8m only	0.55		✓																						
Stramit® Quad 125 6.0m only	0.55	✓																							
Stramit® Quad 150	0.42	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® 150 Half Round (Plain/Slotted)	0.42	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Flatback Half Round (Plain/Slotted)	0.42	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Quad 175	0.55	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Downpipe 100 X 75	0.40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Downpipe Round 85 / 100	0.55	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Product/Rainwater	BMT	ZA	GA	BAS	CLC	COV	CTG	DOC	DUN	EVH	GLY	IST	JAS	MGV	MNR	MON	NTS	PPB	PEC	SHG	SUR	TRN	WLB	WDG	WSP

✓ Product Available - Check relevent section of Product & Service Guide for Stock & Lead Time.



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

PRODUCTION DAYS CRESTMEAD

TO ORDER

Refer to the schedule below and order before 4.00pm Monday to Friday prior to nominated production day.

Subject to minimum order quantities & product lead time.

NOTE: These are Production Days – delivery would normally be carried out on the next scheduled day, as per page 8 map
Exceptions apply - refer to specific product page.

Sheeting	Mon	Tues	Wed	Thurs	Fri
Stramit® Corrugated	•	•	•	•	•
Stramit® Curving Quality	•	•	•	•	•
Stramit Monoclad®	•	•	•	•	•
Stramit Longspan®	•	•	•	•	•
Stramit Speed Deck Ultra®	•	•	•	•	•
Stramit Mini Corry® (ex Erskine Park)	lead time 10 working days				
Stramit CapacityPLUS™ 660	•	•	•	•	•
Stramit Minirib®	•	•	•	•	•
Stramit K-Panel®	•		•		
Stramit C-Clad 280®	lead time 3-5 days subject to mill capacity				
Stramit Premier 300® (Subject to availability)	lead time 3-5 days subject to mill capacity				
Stramit® Tankiron			•		
Stramit SharpLine®	•		•		•

Rainwater

Stramit® Fascia	•	•	•	•	•
Stramit® MPattern Gutter	•	•	•	•	•
Stramit® M Pattern Barge Capping	•	•	•	•	•
Stramit® Queensland Quad	•	•	•	•	•
Stramit® Quad 150 Gutter	•	•	•	•	•
Stramit® Quad 175 Gutter	•	•	•	•	•
Stramit® Compact Gutter & Barge	•	•	•	•	•
Stramit® Half Round Gutter 150	•	•	•	•	•
Stramit S Gutter	•		•		•

Other

Stramit® Custom Flashings	•	•	•	•	•
Stramit® Valley	•	•	•	•	•
Stramit® Roll Top Ridge	•	•	•	•	•
Stramit® Steel Framing Section	•	•	•	•	•
Stramit Condeck HP® composite decking	•	•	•	•	•
Stramit® Purlins	lead time 5 working days				
Stramit® Top Hat 64/96	•	•	•	•	•
Stramit® Top Hat 120 (ex Erskine Park)	lead time 7-10 working days				

- Stramit® Stainless Steel & Copper Products – Check lead time when ordering.
- Stramit® Premium Product Range – Check lead time when ordering.

STANDARD DELIVERY CHARGES

- Any customer who has exceeded their Credit Limit or whose payments are overdue may experience delays in the manufacture and delivery of goods ordered.
- Due to transport limitations the maximum length of rainwater goods is 8.5m.
- Customers/receivers are responsible for unloading. Stramit's terms are "On lorry at site or store".
- UNATTENDED SITES – Stramit drivers will endeavour to effect delivery as close to site as possible. In these instances Stramit will not accept claims for damage to product during unloading nor claims for pilfering of part or all of the delivery made. (Refer to clause 4.6 of the Stramit Terms and Conditions)**

Product Length / Delivery Cost Guide

LENGTH	CODE	COST PER DELIVERY	ESCORT REQ'D	AREA
Up to 13.500	FRSITE	\$165	-	SEQ - Covered in this Book BNS Metro (outside BNS Metro POA) If travel Req'd before daylight 2 escorts Req'd
13.501 - 20.500	FR2SITE205	\$220	-	
20.501 - 25.000	FR2SITE25	\$285 +	1*	
25.001 - 27.000	FR2SITE27	\$415 +	2*	
27.001 - 30.000	FR2SITE30	\$605 +	2*	
30.001 - 33.000	FR2SITE33	\$720 +	2*	+ Police Escort. Subject to police approval and trailer availability.
Freight store	FRSTORE	\$45	-	
Booked early delivery	FR2EARLY	\$50	-	
5am to 9am				
Special delivery	FRSPEC	POA	-	
Escorts	FRESCORT	POA	-	
Redelivery	FRRDCR	\$155		

Packaging

Standard packs will be used. If special packing is required by customer, the following additional cost will be placed on the customer's account.

- Top and bottom cover sheets – when available will be downgrade material @ \$5.00/m per side
- Sleeves for flashings – \$25.00 each.
- Sea wrap – \$75.00 per pack.
- Goods delivered outside our Standard Delivery Schedule will incur a \$50.00 packaging charge.

Timber Crates

Rainwater, Sheeting + Flat Sheet Crate \$15.00 per lin metre. Maximum length 6 metres.

Hi-Ab Facility

Hi Ab deliveries cannot be guaranteed on all consignments.

If a Hi Ab must be used please discuss with Stramit staff at time of order placement.

Maximum length 13.5m/maximum lift 0.5 tonne. Lengths over 13.5m or delivery total over 5 tonne requires a crane on site.

(please note this facility is additional to other charges)

Demurrage

Unloading at customers premises or site in excess of one(1) hour for partial loads or two (2) hours for full loads will be charged at the rate of **\$110** per hour or part thereof.

Redelivery

Product refused at the original delivery and requested to be redelivered will incur a minimum charge of **\$155** over and above the standard delivery charges.

DELIVERY INFORMATION

DISTRIBUTION SCHEDULE – MARYBOROUGH

Nominated Area	Route, Towns Service	Delivery
Maryborough	Maryborough, Tinana, Maryborough West, Granville	Daily
Hervey Bay	Booral to Craignish, Burrum Heads	Daily
Bundaberg	Childers to Bundaberg, Bargara	Daily
West	Biggenden to Mundubbera	Wednesday
Gin Gin	Gin Gin to Rosedale	Monday, Thursday
Gympie	Gympie, Tin Can Bay, Rainbow Beach	Monday, Tuesday, Thursday, Friday

DISTRIBUTION SCHEDULE – ROCKHAMPTON

Nominated Area	Route, Towns Service	Delivery
Rockhampton	North & South Rockhampton, Bouldercombe, Gracemere, Stanwell, Alton Downs, Mount Morgan	Daily
Yeppoon	Zizlie to Yeppoon, Byfield, Farnborough, Cawarral	Daily
Gladstone	Tannum Sands to Gladstone, Bajool, Mount Larcom	Monday, Wednesday
	Turkey Beach, Agnes Water, Miriam Vale	Alternate Wednesday
Biloela	Biloela to Moura, Thangool, Theodore, Baralaba, Monto	Monday
Emerald/North	Duaringa to Emerald, Sapphire, Gemfields, Capella, Peak Downs	Tuesday
	Coalfield district, Middlemount, Wooralinda, Dysart	
Emerald/South	Duaringa to Emerald, Springsure, Rolleston	Thursday

DELIVERY TIMES AND CONDITIONS

Stramit anticipates delivery to be effected between the hours of 7am and 5pm Monday to Friday for product up to 13.5 meters in length. However, customers should note that Stramit reserves the right to delivery outside these hours whenever circumstances outside our direct control occur. Delivery is to kerbside unless otherwise arranged. All deliveries must have a site contact number with order. Depending on site limitations, delivery driver may require signed approval to enter and unload on site. If a semi or body truck is required specifically due to the location, Stramit must be made aware 48 hours before delivery.

Special requests for delivery outside these times will incur charges

DELIVERY AREAS

Delivery outside specified areas and/or off the normal route of delivery may be arranged however additional charges will apply.

PRODUCT RETURNS

Product that has been manufactured or purchased specifically to your requirements CANNOT be returned. Stock line items may be returned for credit, subject to the following charges:

- Where goods are returned by the customer, a re-stocking fee of 20% (\$20 minimum) is applicable.
- Where goods are picked up by Stramit for return, standard delivery charges plus a re-stocking fee of 20% (\$20 minimum) are applicable.
Damaged goods will not be accepted for credit.

CUSTOMER PICK UPS FROM CRESTMEAD

Customer Service Centre will open from 6.00am to 4.00pm Monday to Friday for collection. Stock orders can be placed 1 hour prior to pick-up. **Cut to length and bought in products not collected after 2 weeks from date of pick-up will be delivered to your store and you will be charged accordingly.**

COUNTRY CUSTOMERS: To arrange pick-ups by your carrier, please contact our office to arrange a loading time. Please phone at least **1 day before the proposed pick-up**. If Stramit is charged by your carrier for pick-up on your behalf without our prior agreement, such accounts or charges will be referred to you for payment by way of invoice

LONG LENGTH DELIVERY OUT OF BRISBANE

- Lengths longer 13.5 metres will require an onsite crane by customer for unloading.
- Specific times of travel for product in excess of 17.0 metres in length do apply and will vary according to the time of year and location. Brisbane metro area has a number of additional exclusions.
- Loads in excess of 13.8 metres must be off the road between the hours of 7.00am – 9.00am and 4.00pm – 6.00pm. Product in excess of 20m will require escort. Products exceeding 25m will require two escorts. If a truck is required to leave Stramit in darkness and is over 20 metres, two escorts will be required.
- Loads exceeding 30 metre require one Police escort and two pilots. Police Escort Permits require a minimum of twenty-eight (28) business days' notice to book a Police Escort with orders having to be confirmed with Stramit by midday on day one of the notice period. Police Escort Permits are subject to Police availability and approval and cannot be guaranteed until such time as approval is given by the Police. Loads exceeding 35m require two Police and two pilots. Long loads may require additional personnel to steer trailer (additional charge).
- QLD Legislation on long lengths may vary without notice and Stramit reserves the right to apply charges applicable to such changes.

ESCORTS COSTS

Escort charges depend on the length of product transported and are additional to Delivery Charge

WORK COVER RESTRICTIONS

Customers should be aware that under Work cover legislation there are restrictions governing the ability of drivers to load/unload to/from heavy vehicles.

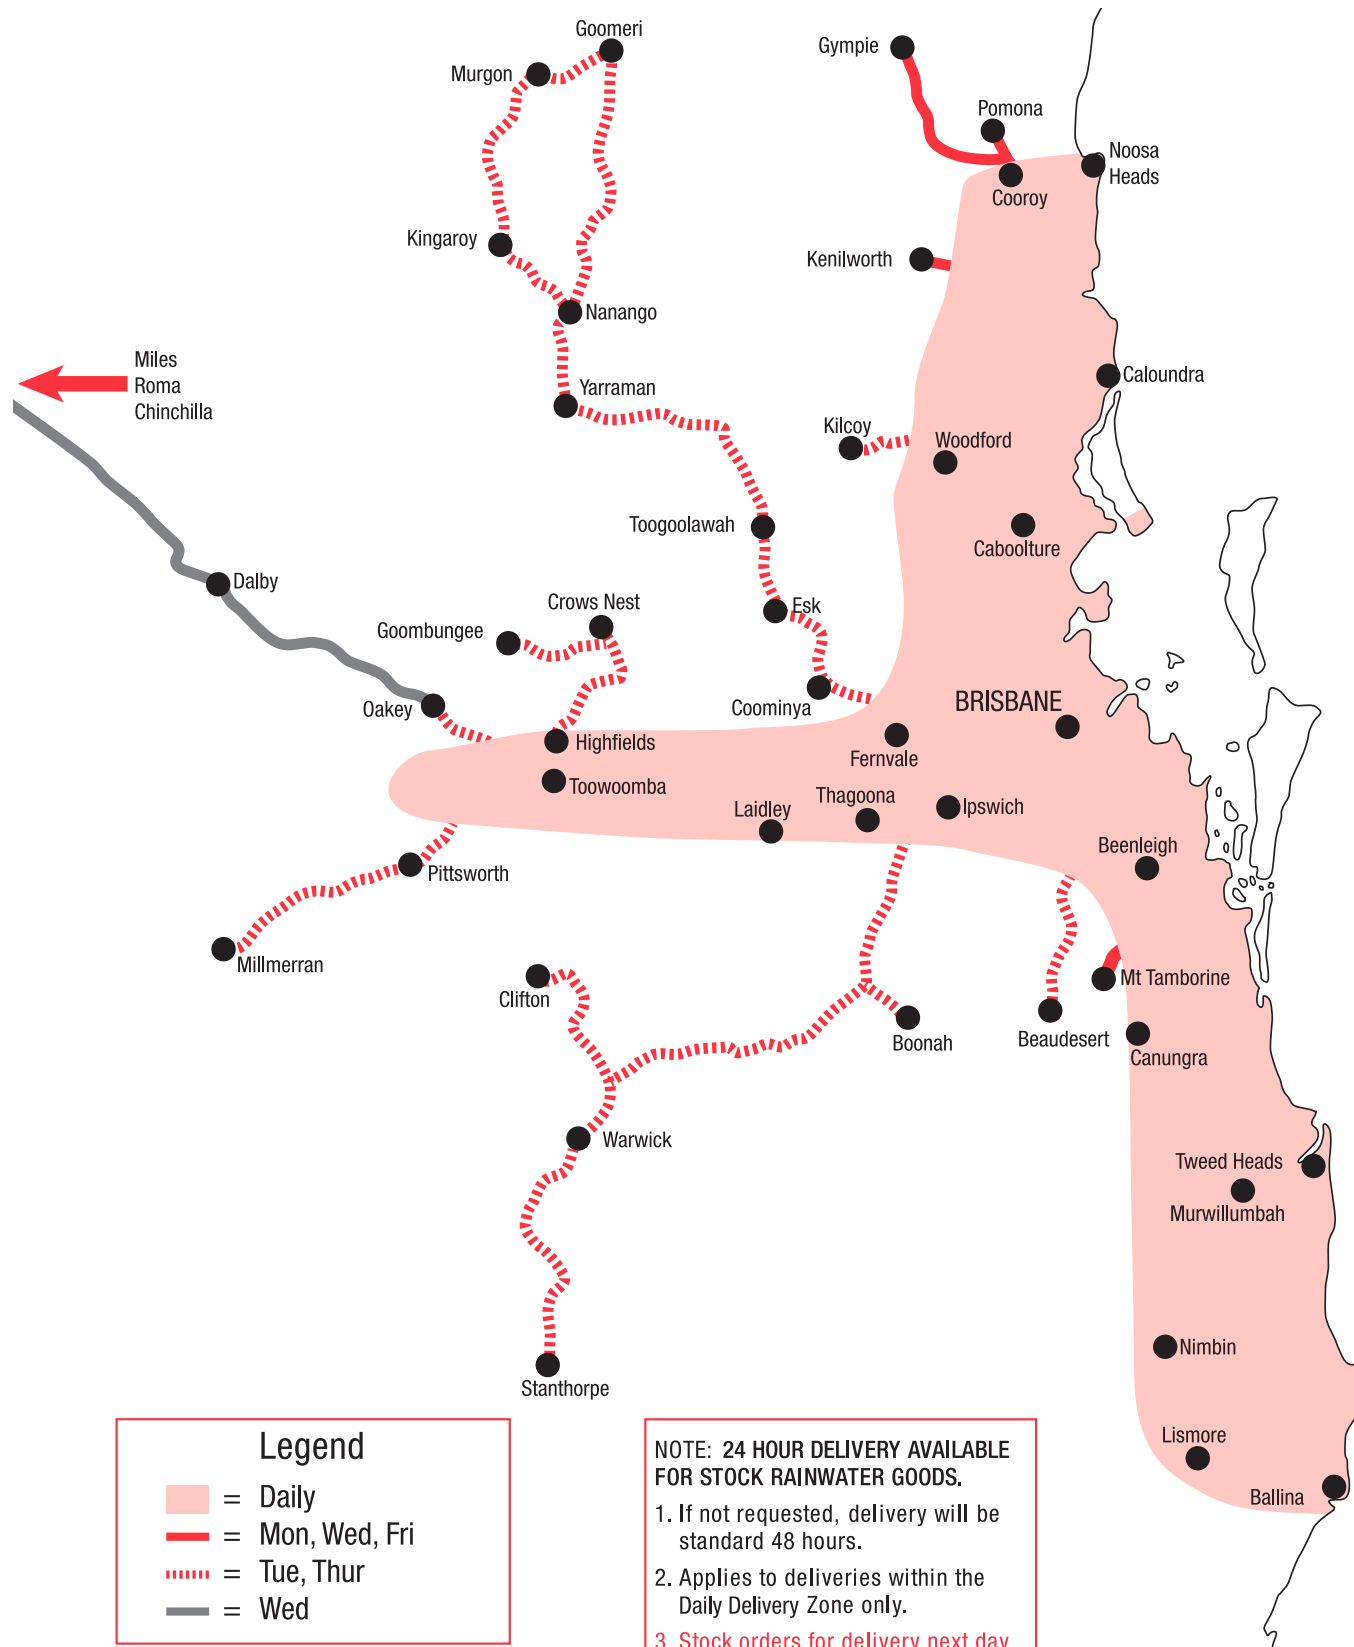
Customers with special requirements or unusual sites should contact the Transport Manager before delivery to clarify the requirements.

REFER TO TERMS AND CONDITIONS ON INSIDE BACK COVER

If the site is considered unsafe for the delivery vehicle, the driver will inform both Stramit and the customer (where possible) for alternative arrangements to be made. If delivery was unsuccessful through no fault of Stramit Building Products, the delivery will be made on the next scheduled delivery day.

Hi-Ab unloads are from the trailer to the ground. It is unsafe for the Hi-Ab's to be used to load product on to buildings.

BRISBANE METROPOLITAN & COUNTRY AREA DELIVERY SCHEDULE

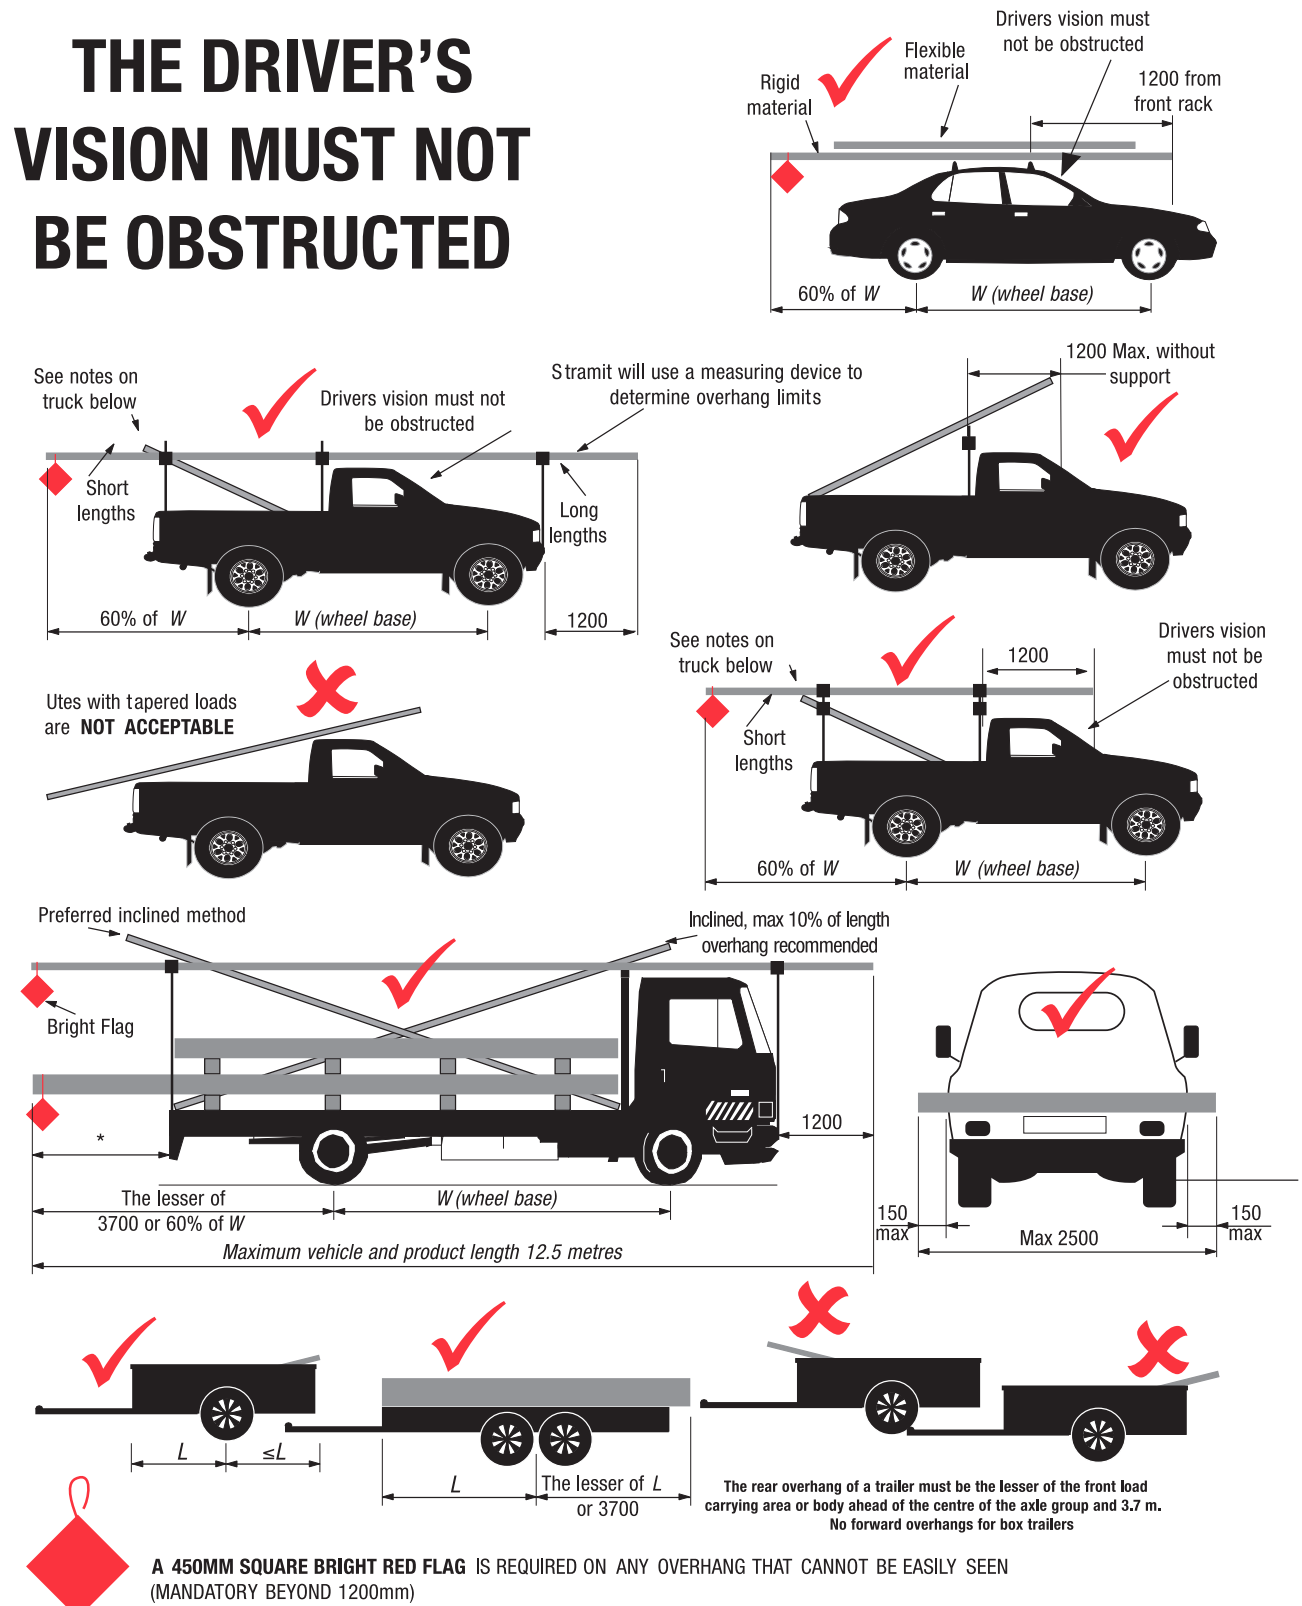


LOADING REQUIREMENTS



OVERHANG LIMITS

THE DRIVER'S VISION MUST NOT BE OBSTRUCTED



LOADING REQUIREMENTS

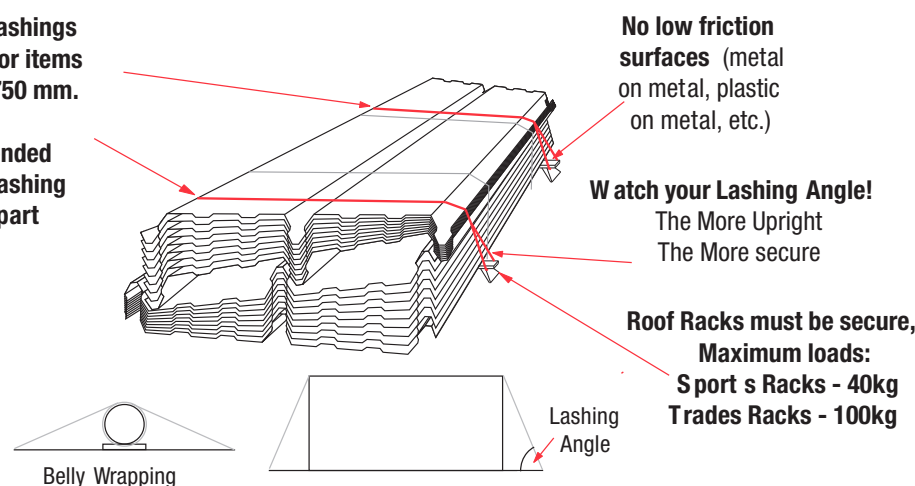


SECURE YOUR LOAD!

**DO NOT USE OCCY STRAPS
OR FLEXI STRAPS**

Minimum 2 lashings
per stack for items
longer than 750 mm.

Recommended
Minimum Lashing
1.5m apart



*SEE THE TRANSPORT SAFETY GUIDELINE OWNER PICK UPS FOR FURTHER INFORMATION

VEHICLES CONSIDERED INAPPROPRIATE CANNOT BE LOADED! YOUR SAFETY IS OUR CONCERN

The information presented is for guidance only and compliance with applicable laws and standards remains your responsibility

Table 1 - Lashing Requirements

Lashing Angle to Horizontal	25 mm hand tightened webbing	25 mm ratchet webbing	35 mm ratchet webbing	8 mm synthetic rope with single hitch
60 to 90°	52 kg per strap	170 kg	430 kg	87 kg per rope
45 to 60°	46 kg per strap	140 kg	350 kg	71 kg per rope
30 to 45°	30 kg per strap	100 kg	250 kg	50 kg per rope
15 to 30°	15 kg per strap	52 kg	130 kg	26 kg per rope

Key Assumptions in Tables 1

1. All lashings are fully tensioned. If not, then more lashings may be required.
2. **No low friction surfaces** (e.g. steel on steel, plastic on plastic, plastic on steel, etc.)
3. A minimum static coefficient of friction of $\mu = 0.40$ is achieved under all products and between layers of a load. (e.g. rubber or timber against steel or plastic).
4. **Round loads** require **belly wrapping** and extra restraints.

QUICK ROOFING ESTIMATE – HIPPED ROOF TAKE-OFF

The table of Roof Slope Factors on page 12 allows quick calculations of roof area, sheet length and hip length.

These methods are for quick estimating purposes only. Accurate measurements must be taken from the actual roof frame before ordering roofing and rainwater products. As an example, take a typical hipped roof where all four roof sections have the same slope (30°) and all hips are of equal length.

ROOF AREA

First determine the area of the roof plan by multiplying the length of the roof by the width. Before making the calculation, add gutter overhangs of 50mm. In this case, there are gutters on all four sides. To find the area of the hipped roof, simply multiply this plan area by the Roof Slope Factor for Roof Area. The same method is used for gable roofs.

$$19.1 \times 8.1 = 154.7 \times 1.155 = 178.7$$

Therefore, roughly 179m² of sheeting will be needed to cover the roof. On complex roof shapes, extra may need to be added to allow for wastage.

SHEET LENGTH

On the roof plan, measure the distance from the line of the ridge to the outside edge of the fascia, which in the example is half the span or 4000mm. Multiply this measurement by the Sheet Length Roof Slope Factor to find the length of the sheet required to span from the ridge to the fascia. Note that all roof sheeting must extend at least 50mm beyond the fascia line to provide gutter overhang.

$$4000 + 50 \times 1.155 = 4678\text{mm}$$

HIP CAPPING

To find the length of ridge capping required to cover one hip, measure the distance from the ridge line to the fascia on the roof plan (here 4000mm) add the gutter overhang and multiply by the Hip Length Roof Slope Factor for 30°. Multiply by 4.

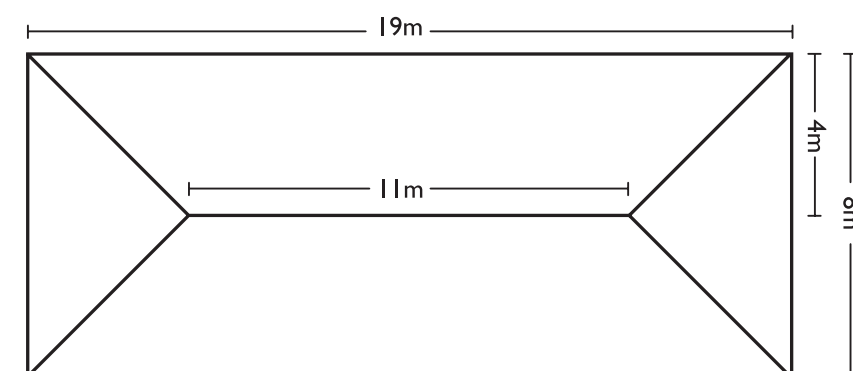
$$4000 + 50 \times 1.528 \times 4 = 24.8\text{m}$$

RIDGE CAPPING

For hipped roofs where all sides have the same slope, the length of the top ridge is equal to the length of the roof plan minus the width, regardless of slope. Add 5% to all capping to allow for laps.

$$19 - 8 = 11 + 5\% = 11.55\text{m}$$

Typical hipped roof (roof slope = 30°)



* Refer to the Stramit take off "Made Easy Guide" for further information

QUICK ROOFING ESTIMATE – HIPPED ROOF TAKE-OFF

ROOF SLOPE FACTORS

Roof Slope (degrees)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Roof Area/Sheet Length	1.000	1.001	1.001	1.002	1.004	1.006	1.008	1.010	1.012	1.015	1.019	1.022	1.026	1.031	1.035
Hip Length	1.414	1.415	1.415	1.416	1.417	1.418	1.420	1.421	1.423	1.425	1.428	1.430	1.433	1.436	1.439

Roof Slope (degrees)	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Roof Area/Sheet Length	1.040	1.046	1.051	1.058	1.064	1.071	1.079	1.086	1.095	1.103	1.113	1.122	1.133	1.143	1.155
Hip Length	1.443	1.447	1.451	1.456	1.460	1.465	1.471	1.477	1.483	1.489	1.496	1.503	1.511	1.519	1.528

Roof Slope (degrees)	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
Roof Area/Sheet Length	1.167	1.179	1.192	1.206	1.221	1.236	1.252	1.269	1.287	1.305	1.325	1.346	1.367	1.390	1.414
Hip Length	1.537	1.546	1.556	1.567	1.578	1.590	1.602	1.616	1.630	1.644	1.660	1.677	1.694	1.712	1.732

Roof Slope (degrees)	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
Roof Area/Sheet Length	1.440	1.466	1.494	1.524	1.556	1.589	1.624	1.662	1.701	1.743	1.788	1.836	1.887	1.942	2.000
Hip Length	1.753	1.775	1.798	1.823	1.849	1.877	1.907	1.939	1.973	2.010	2.049	2.091	2.136	2.184	2.236


ROOFING • CLADDING • ACCESSORIES

Product Roofing/Cladding/Accessories	Product Details	BMT mm	Finish	Code	Unit
 762 cover ± 4 (Overall sheet width 855) 16 high CTR to CTR [76.2]	Stramit® Corrugated	0.42	ZA	C42ZA	per m ²
		0.48		C48ZA	per m ²
		0.42	COL	C42X***	per m ²
		0.48		C48X***	per m ²
		0.42	DS(SUR/CLC)	C42D***	per m ²
		0.42	GA	C42GA	per m ²
To convert price to linear metres multiply by .762					
Minimum length 300mm		DS = Double sided COLORBOND® steel			
Short Length Surcharge (Under 1m)		CUTBACKLTH			per sheet
Tolerance +0, -15mm	NOTE: If end lapping with curved sheets, we must be advised at time of ordering.				
Fibreglass Roof Sheeting	Suit Stramit® Corrugated sheeting				
 762 cover ± 4 (Overall sheet width 855) 16 high CTR to CTR [76.2]		2400gsm	TSFGC24CLR/OPA	lin metre	
		3050gsm	TSFGC30CLR/OPA	lin metre	
		Polycarbonate	TSPCCCLR**	lin metre	
	Sizes: 1.8, 2.1, 2.4, 2.7, 3.0, 3.3, 3.6, 3.9, 4.2, 4.8, 5.4, 6.0, 8.1 Available in: CLR-Clear, DKT-Dark Tint, GRY-Grey, LBZ-Light Bronze, OPL-Opal.				
Maximum length 12.5m	Cool Lite Wonderglass Wonderglass 32 Weather Seal Washer		TSWGCLC24WHI TSWGC24OPL TSFGWW32H	lin metre lin metre pack 100	
NOTE: For fasteners refer to page 15.					
Fasteners (non cyclonic) Roof AS3566 Class 4					
	M6 x 50 Hex Head SDS - Roof Zips (for crest fixing to soft timber and steel) (up to 1.6mm steel)	Plain Plain Colour Colour	S0650HZIP4 S0650HZIP4H S0650HZIP***4 S0650HZIP***4H	per box 1000 per bag 100 per box 1000 per bag 100	
	12 x 50 Hex Head Type 17 (for crest fixing to hardwood) Not stocked bags of 100	Plain Colour	S1250H174 S1250H17***4	per box 1000 per box 1000	
	12 x 39 Auto Tek (for crest fixing to steel)	Plain Plain	S1239HAT4 S1239HAT4H	per box 1000 per bag 100	
	1.0mm to 3.5mm	Colour	S1239HAT***4	per box 1000	
Wall fixing					
	10 x 16 Hex Head SDS (for pan fixing to steel)	Plain Plain Colour Colour	S1016HT4 S1016HT4H S1016HT***4 S1016HT***4H	per box 1000 per bag 100 per box 1000 per bag 100	
	10 x 16 Wafer Tek (for fixing to steel)	Plain Plain	S1016WT S1016WTH	per box 1000 per bag 100	
	10 x 25 Wafer Type 17 (for fixing to timber)	Plain	S1025W17 S1025W17H	per box 1000 per bag 100	
	12 x 25 Hex Head Type 17 (Pan fixing to timber)	Plain Plain Colour	S1225H174 S1225H174H S1225H17***4 S1225H17**4H	box 500 bag 100 box 500 bag 100	
	Infill Strip	0.915m	CEFS	each	
NOTE: For cyclonic & other fixings refer to page 22 & 23.					

ROOFING • CLADDING • ACCESSORIES

Product Roofing/Cladding/Accessories	Product Details	BMT mm	Finish	Code	Unit
Stramit Monoclad®		0.42	ZA	MC42ZA	m²
		0.48		MC48ZA	m²
		0.42	COL	MC42X***	m²
		0.48		MC48X***	m²
		0.42	DS(SUR/CLC)	MC42D***	m²
			Also available in reverse roll		
			NB: Due to our roll forming process you may experience some slight roller marking on the under side of double sided Sur & Clc.		
		0.42	GA	MC42GA	m²
Tolerance +0, -15mm	Minimum length 300mm Short Length Surcharge		To convert price to linear metres multiply by .762 (Under 1m)		CUTBACKLTH sheet

NEW PRODUCT



MC MonoLap 73mm 7.62m
(10 sheets per roll)

12x68 Hex Tek Cls4
– only suitable for MC Monolap above
(40 screws per roll – including plate & washer)

For Cyclonic areas:
14x68 Hex Tek Cls 4
MC MonoLap Stop End Tool

^NOTE: Other colours subject to lead time. Please contact your Stramit representative for further information.

Wall cladding		0.35	ZA	MC35ZA	m²
		0.35	COL	MC35X***	m²
			Check Page 5 for availability		
	Short Length Surcharge		(Under 1m)	CUTBACKLTH	sheet

Fibreglass Roof Sheeting		Suit Stramit Monoclad® sheeting			
		2400gsm 3050gsm		TSFGMC24CLR/OPA TSFGMC30CLR/OPA	lin metre lin metre
		Polycarbonate		TSPCMC**	lin metre
		Sizes: 1.8, 2.1, 2.4, 2.7, 3.0, 3.6, 4.2, 4.8, 5.4, 6.0, 8.1 Available in: CLR-Clear, DKT-Dark Tint, GRY-Grey, LBZ-Light Bronze, OPL-Opal.			
		Cool Lite Wonderglass Wonderglass		TSWGCLMC24WHI TSWGMC24OPL TSFGWW32H	lin metre lin metre per 100
		32mm Weather Seal Washer NOTE: For fasteners refer to page 15.			

Fasteners (Non cyclonic) Roof AS3566 Class 4		M6 x 50 Hex Head SDS - Roof Zips (for crest fixing to steel up to 1.6mm steel)			
		Plain		S0650HZIP4	per box 1000
		Plain		S0650HZIP4H	per bag 100
		Colour		S0650HZIP***4 S0650HZIP***4H	per box 1000 per bag 100
		M6 x 65 Hex Head SDS-Roof Zips (for crest fixing to timber & steel) (Not hardwood) (up to 1.6mm in steel)			
		Plain		S0665HZIP4	box 1000
		Plain		S0665HZIP4H	bag 100
		Colour		S0665HZIP***4 S0665HZIP***4H	box 1000 bag 100
		12 x 65 Hex Head Type 17 (for crest fixing to hardwood)			
		Plain		S1265H174	per box 1000
		Colour		S1265H17***4	per box 1000
		12 x 50 Auto Tek (for crest fixing to steel 1.00mm to 4.5mm)			
		Plain		S1250HAT4	box 1000
		Colour		S1250HAT***4	box 1000

Accessories		Stop End Tools (non return)			each
		Infill Strips (bottom) (top)	0.953m 0.953m	MCEFSBTM MCEFSTOP	each each

NOTE: For wall fixings refer to page 13. For cyclonic fixings refer to page 22 & 23.

ROOFING • CLADDING • ACCESSORIES

Product Roofing/Cladding/Accessories	Product Details	BMT mm	Finish	Code	Unit
Stramit Longspan®		0.42	ZA	LS42ZA	per m²
		0.48		LS48ZA	per m²
		0.42	COL	LS42X***	per m²
		0.48		LS48X***	per m²
		0.42	DS(SUR/CLC)	LS42D***	per m²
		0.42	GA	LS42GA	per m²
*48hr lead time	Minimum length 550mm.				
Tolerance +0, -15mm	Short Length Surcharge		(Under 1m)	CUTBACKLTH	per sheet

Fibreglass Roof Sheeting	Suit Stramit Longspan® sheeting				
		2400gsm 3050gsm		TSFGLS24CLR TSFGLS30CLR	lin metre lin metre
		32mm Weatherseals		TSFGWW32H	per 100
Fasteners for fixing Fibreglass	Fibreglass Tek® M6.5-14 x 65mm Hex Hd (for crest fixing to steel)	Plain		TSFG1465WW32	per box 500
Fasteners for fixing Polycarbonate	PolyZIPS® M6.5-14 x 50mm Hex Hd (for crest fixing to steel)	Plain		TSPC1450DW26	per box 250
Fasteners suit Stramit Longspan® (non cyclonic) AS3566 Class 4	M6 x 65 Hex Head SDS-Roof Zips (for crest fixing to timber) * Not Hardwood	Plain Plain Colour Colour		S0665HZIP4 S0665HZIP4H S0665HZIP***4 S0665HZIP***4H	per box 1000 per bag 100 per box 1000 per bag 100
	12 x 50 Auto Tek (for crest fixing to steel 1.00 - 4.5mm)	Plain Colour		S1250HAT S1250HAT***4	box 1000 box 1000
	M6 x 50 Hex Head SDS - Roof Zips (for crest fixing to steel) (up to 1.6mm steel)	Plain Plain Colour Colour		S0650HZIP4 S0650HZIP4H S0650HZIP***4 S0650HZIP***4H	per box 1000 per bag 100 per box 1000 per bag 100
	Infill Strip (Bottom) (Top)	0.900m 0.900m		LSEFSBTM LSEFSTOP	each each

Wall Fixing	NOTE: For more Wall Fixing refer to page 13.				
	12x 20 HexTek (Pan Fixing to Steel)	Plain Plain Colour		S1220HT4 S1220HT4H S1220HT***4	Box 500 Bag100 Box 500

ROOFING • ACCESSORIES

Product Roofing/Accessories	Product Details	BMT mm	Finish	Code	Unit
	Stramit Speed Deck Ultra®	0.42	ZA	UD42ZA	per m ²
		0.48	ZA	UD48ZA	per m ²
		0.42	COL	UD42X***	per m ²
		0.48	COL	UD48X***	per m ²
		0.42	DS(SUR/CLC)	UD42D***	per m ²
		0.42	GA	UD42GA	per m ²
				Minimum length 600mm	

Tolerance +0, -15mm

NOTE: May also be used for domestic applications. One consequence of the clip/sheeting connection in a concealed fixed system is the friction between the deck and the clip. In residential situations, however, the clips are often spaced much more closely, which increases the propensity for friction and hence noise. The use of insulation blanket can alleviate the impact of some of the noise.

	Farlap Lapping Accessory (1 sheet wide)	UDFARLAP	each
	Farlap Lapping Accessory 7m roll (10 sheets per roll)	UDFARLAP70	roll
	Farlap Turn-Up/Turn down tool	UDFARLAPSETD	each
	Skylap Joint System	UDSKYLAP	each

Fibreglass Sheeting	Suit Stramit Speed Deck Ultra® decking		
	2400gsm	TSFGUD24CLR/OPA	lin metre
	3050gsm	TSFGUD30CLR/OPA	lin metre

NOTE: Fibreglass cannot end lap. Lap flashing is required.

NOTE: Allow 3 working days for delivery.

Fixing Clips	Fixing Clips no fasteners (40 per box)	GA	UDFC	each
46mm high 40mm wide 745mm long	Pre-loaded Fixing Clips 12 x 30 Hed Tek No Neo (40 per box) Steel Only Guide only - Fixing Clips = 1/sheet/purlin	GA	UDFCPL	each
	Rib Stop End (End Cap)	ZA	UDRSEZA	each

Fasteners AS3566 Class 3	Clipfixing 12 x 30 Hex Head Tek No Neo (for fixing to metal 1.6 to 3.0mm)		S1230HTNN	per box 1000
	14 x 39 Hex Head Type 17 No Neo (for fixing to hardwood)		S1439H17NN4	per box 1000
	12 x 40 Hex Head No Neo Batten Zip (for fixing to timber and metal up to 1.00mm)		S1240HMTZIP S1240HMTZIPH	per box 1000 bag 100

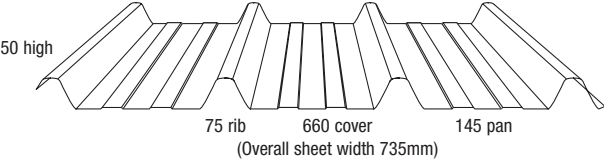



Accessories	Stop Ending Tool (non return)		UDSETD	each
	Infill Strips	0.933m	UDEFsBTM	each
		0.933m	UDEFSTOP	each

Please refer to the **Stramit Speed Deck Ultra®** brochure for full details of wind loading installation procedure etc.

ROOFING • ACCESSORIES

Product Roofing/Accessories	Product Details	BMT mm	Finish	Code	Unit
	Stramit CapacityPLUS™ 660	0.42	ZA	CP42ZA	per m ²
		0.42	COL	CP42X***	per m ²
		0.48	ZA	CP48ZA	per m ²
		0.48	COL	CP48X***	per m ²
		0.42	DS(SUR/CLC)	CP42D***	per m ²




Tolerance +0, -15mm

Fibreglass Sheeting		Suit Stramit® Capacity Plus Sheeting		
	2400gsm	TSFGCP24CLR TSFGCP24OPA	lin metre lin metre	
	3050gsm	TSFGCP30CLR TSFGCP30OPA	lin metre lin metre	
Fasteners Class 4	 12 x 80 Hex Head Teks Hi Grip (for crest fixing to steel)	Plain Colour	S1280HT4 S1280HTSUR4	per box 500 per box 500
	 14 x 90 Hex Head Type 17 (For crest fixing to hardwood)	Plain Colour	S1490H174 S1490H17***4	per box 500 per box 500
	Stop End Tool		CPSETD	each
	Infill Strips	0.660m	CPEFSBTM CPEFSTOP	each each




ACOUSTIC PRODUCTS

Product Perforated Sheeting	Product Details	Code	Finish	BMT mm	Unit
	Perforated Acoustic Pattern	MC42IOWHP11	COL	0.42	per m ²
		MC42IAZP11	ZA	0.42	per m ²
	Perforated Acoustic Pattern	C42IOWHP11	COL	0.42	per m ²
		C42IAZP11	ZA	0.42	per m ²
	Perforated Acoustic Pattern	LS42IOWHP11	COL	0.42	per m ²
		LS42IAZP11	ZA	0.42	per m ²
Stramit Premier 300™ Available Ex Brisbane	Perforated Acoustic Pattern	CC30055IOWHP11	COL	0.55	per m ²
	Minimum Length 500mm. Recommended max manufactured length is 6.0m. Any lengths over this at customers risk. Subject to coil availability & minimum orders quantities apply. Please contact your Stramit representative for further information.				
	Tolerance +0, -15mm				

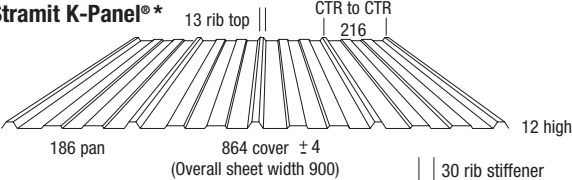
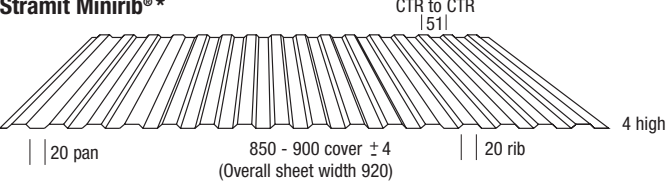
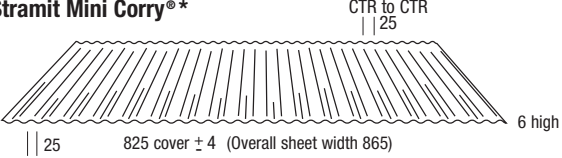

CURVED ROOFING • ACCESSORIES

Product	Product Details	BMT mm	Finish	Code	Unit
Stramit® Curving Quality 	10.5 corrugations, 762 cover	0.60	ZA	CD60ZA	per m ²
		0.60	COL	CD60X***	per m ²
		0.60	GA	CD60GA	per m ²
	Short Length Surcharge		(Under 1m)	CUTBACKLTH	per sheet
	Minimum length 700mm If end lapping with .42 or .48 bmt sheets, we must be advised at time of ordering. NOTE: Stramit does not curve/bullnose sheeting. Contact your local contractor for this task.				
Flashings 	Luran Plastic Curved Sections to match COLORBOND® steel				
	Barge 300, 400 & 500 radius			CAPVCB***COL/ZA	each
	Hip 300, 400, 500 & 600 radius			CAPVCH***COL/ZA	each
	Valley 300, 400, 500 & 600 radius			CAPVCV***COL/ZA	each
NOTE: Lead time 5-10 days.					
Straight PVC Sections (Suit each flashing above) 	Straight Ridge Capping 2600mm			CAPVCSTX***26	each
	(suits concave profiles to 300mm drop)				
	Straight Ridge Capping 1800mm			SPEC ORDER	each
	(suits concave profiles to 200mm drop)				
	Straight Valley 2400mm			SPEC ORDER	each
Straight Barge 2400mm				SPEC ORDER	each
NOTE: For fasteners refer to page 13					




CLADDING

Product	Product Details	BMT	Finish	Code	Unit
Stramit® C-Clad 280 		0.55	ZA	CC28055ZA	per m ²
		0.55	COL	CC28055X***	per m ²
	Available in some ultra & metallic finishes NB: Lead time 3-5 days. Subject to mill capacity. Packing charges will apply. Recommended max manufactured length is 6.0m. Any lengths over this will be at customers risk. Minimum length 500mm NB: Large project orders may require extended lead time.				
Accessories suit	Starter Clip		GA	CCSC	each
Stramit® C-Clad / Stramit® Premier 300	(Box 1000)				
Stramit® Premier 300 	Plain	0.55	ZA	CC30055ZA	per m ²
		0.55	COL	CC30055X***	per m ²
	Available in some ultra & metallic finishes. Recommended max manufactured length is 6.0m. Any lengths over this will be at customers risk. Minimum length 300mm NB: Lead time 3-5 days. Subject to mill capacity. Packing charges will apply.				
Tolerance +0, -15mm	300mm Cover				
Fasteners 	10 x 25 Wafer Type 17	Plain		S1025W17	per box 1000
	(for fixing to timber)				
	10 x 16 Wafer Tek	Plain		S1016WT	per box 1000
	(for fixing to steel)	Plain		S1016WTH	per bag 100

CLADDING • ACCESSORIES

Product	Product Details	BMT mm	Finish	Code	Unit
Stramit K-Panel®** 		0.35	ZA	KP35ZA	per m ²
		0.35	COL	KP35X***	per m ²
		0.42	ZA	KP42ZA	per m ²
		0.42	COL	KP42X***	per m ²
		0.42	DS(SUR/CLC)	KP42D***	per m ²
	Short Length Surcharge		(Under 1m)	CUTBACKLTH	per sheet
	Also available in COLORBOND® steel Matt and COLORBOND® Ultra steel. Minimum length 300mm Maximum length manufactured is 6.0 metres. Maximum length of timber base packing available 6.0 metres. Lengths greater than 6.0m at customer's risk.				
	NOTE: ORDER BY FRIDAY DELIVERY TUESDAY NOTE: ORDER BY TUESDAY DELIVERY THURSDAY Due to the nature of K-Panel, we cannot guarantee to deliver small quantities (under 10 sheets) by normal transport, without damage. Therefore, we strongly recommend that orders for small quantities be collected from our factory. However, if you still require us to deliver small quantities by our transport, we will not accept responsibility for any damage, which may occur. Alternatively, we are happy to arrange a "special" delivery, which will incur a \$60 surcharge.				
Stramit Minirib®* 		0.35	ZA	MR35ZA	per m ²
		0.35	COL	MR35X***	per m ²
		0.42	ZA	MR42ZA	per m ²
		0.42	COL	MR42X***	per m ²
		0.48	COL	MR48X***	per m ²
	Short Length Surcharge		(Under 1m)	CUTBACKLTH	per sheet
	Also available in COLORBOND® steel Matt and COLORBOND® Ultra steel. Cover depends on number of ribs lapped and its application. Maximum length manufactured is 6.0 metres. Maximum length of timber base packing available 6.0 metres. Lengths greater than 6.0m at customer's risk.				
	NOTE: ORDER BY FRIDAY DELIVERY TUESDAY NOTE: ORDER BY TUESDAY DELIVERY THURSDAY Due to the nature of K-Panel, we cannot guarantee to deliver small quantities (under 10 sheets) by normal transport, without damage. Therefore, we strongly recommend that orders for small quantities be collected from our factory. However, if you still require us to deliver small quantities by our transport, we will not accept responsibility for any damage, which may occur. Alternatively, we are happy to arrange a "special" delivery, which will incur a \$60 surcharge.				
Stramit Mini Corry®* 		0.42	ZA	MK42ZA	per m ²
		0.42	COL	MK42X***	per m ²
		0.42	DS(SUR/CLC)	MK42D***	per m ²
		0.48	ZA	MK48ZA	per m ²
		0.48	COL	MK48X***	per m ²
	Short Length Surcharge		(Under 1m)	CUTBACKLTH	per shee
	Also available in COLORBOND® steel Matt and COLORBOND® Ultra steel. Cover depends on number of ribs lapped and its application. Maximum length manufactured is 6.0 metres. Maximum length of timber base packing available 6.0 metres. Lengths greater than 6.0m at customer's risk.				
	NOTE: ORDER BY FRIDAY DELIVERY TUESDAY NOTE: ORDER BY TUESDAY DELIVERY THURSDAY Due to the nature of K-Panel, we cannot guarantee to deliver small quantities (under 10 sheets) by normal transport, without damage. Therefore, we strongly recommend that orders for small quantities be collected from our factory. However, if you still require us to deliver small quantities by our transport, we will not accept responsibility for any damage, which may occur. Alternatively, we are happy to arrange a "special" delivery, which will incur a \$60 surcharge.				
Fasteners 	10 x 25 Hex RippleZip Cls4 Bx 1000		Plain Colour	S1025HRZIP4 S1025HRZIP***4	
	10 x 25 Hex RippleZip Cls4 PK 100		Plain Colour	S1025HRZIP4H S1025HRZIP***4H	
	Pop Rivets				
	Pop Rivets 3.2mm x 7.5mm		Colour Plain	PR3275*** PR3275AL	per box 100 per bag 100

* All the above products will incur a packing charge for all deliveries on outside transport.

ROOFING • CLADDING • ACCESSORIES						
Product	Details	Cover Width mm	Ordering Code	Finish	BMT mm	Unit
Roofing/Cladding/Accessories						
	25mm Rib (short)	290	SLS290D55X***	COL	0.55	per m²
		490	SLS490D55X***	COL	0.55	per m²
	38mm Rib (tall)	265	SLT265D55X***	COL	0.55	per m²
		465	SLT465D55X***	COL	0.55	per m²
	25mm Rib (short)	320	SLS320C55X***	COL	0.55	per m²
		520	SLS520C55X***	COL	0.55	per m²
	38mm Rib (tall)	285	SLT285C55X***	COL	0.55	per m²
		465	SLT465C55X***	COL	0.55	per m²
	Clip (short) 25mm		SLSCGA	GA		each
	Clip (tall) 38mm		SLTCGA	GA		each
Available in ultra & matt finishes. Minimum length 2000, Maximum length 9000 NB: Lead time 72 hours.		Roof pitches below 7.5° for SharpLine® direct fix and 5.0° for SharpLine® clip fix profiles require sealed side laps. All Roof lengths above 5.0m also require sealed side laps. Refer to Product Technical manual brochure for installation requirements to plywood backing.				

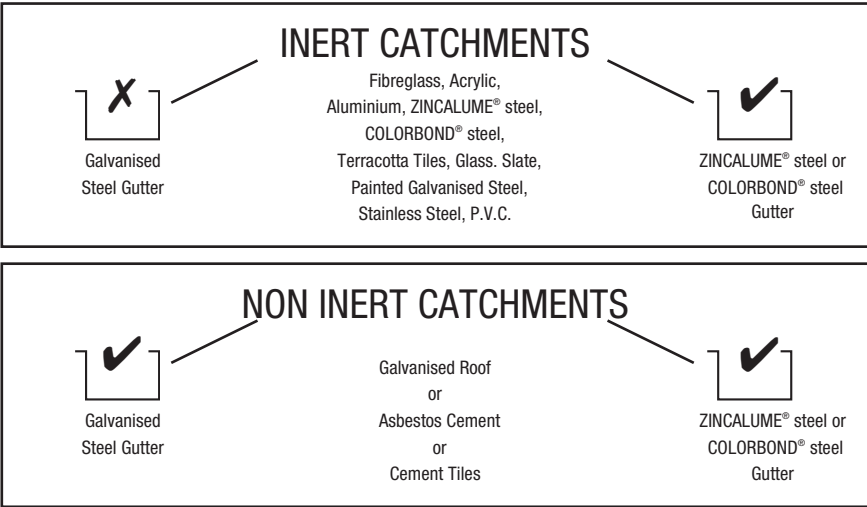
	10 x 16 Flathead Needle Point	S1016FNP	Plain	per box 1000
	10 x 16 Wafer Tek (For fixing to steel)	S1016WT	Plain	per box 1000
	10 x 25 Wafer Type 17 (For fixing to timber)	S1025W17	Plain	per box 1000


COLORBOND® steel / ZINCALUME® steel – CARE & MAINTENANCE

Hints and tips to achieve maximum life from your COLORBOND® steel / ZINCALUME® steel product.


- COLORBOND® steel / ZINCALUME® steel used in areas not washed by rainfall should be cleaned down at regular intervals.
- Brick cleaning acid must not be allowed to contact steel fascia, gutter or roofing and walling.
- Never immerse COLORBOND® steel / ZINCALUME® steel in sand, soil or concrete.
- Do not use “touch-up” spray can on COLORBOND® steel.
- Avoid “swarf” damage remove metal debris from cutting and/or drilling.
- Keep material dry and clear of the ground when in bundles prior to installation.
- Prepainted metal roofing components are often supplied with a protective plastic film. This can be affected by sunlight and should be removed as soon as practicable. Removal can be difficult, if not impossible, if exposed to sunlight for prolonged periods.
- Contact with dissimilar metals and run-off from dissimilar metals such as Copper, lead, etc must be avoided.
- Roofing and guttering need to be free draining and free from the accumulation of dirt or leaves.




Water Flow Guide Chart








TANK IRON					
Product Tank Iron	Product Details	BMT mm	Finish	Code	Unit
	8 corrugations, 610 cover	0.60	AQUAPLATE® steel GA	CT61060AQGA	per m²
		0.60	AQUAPLATE® steel COL*	CT61060AQ***	per m²
	10 corrugations, 720 cover	0.60	AQUAPLATE® steel GA	CT72060AQGA	per m²
		0.60	AQUAPLATE® steel COL#	CT72060AQ***	per m²
	Short Length Surcharge		(Under 1m)	CUTBACKLTH	per sheet
*8 corrugations Paperbark®, Pale Eucalypt®, Windspray®, Deep Ocean®, Surfmist®. # 10 corrugations Paperbark®, Pale Eucalypt®, Windspray®, Deep Ocean®, Surfmist®. Tank Iron milled Wednesday only. Minimum length 700mm					
Double Sided Flat AQUAPLATE® steel (Base)					
	Flat Sheet Tank Base 1200 AQUAPLATE® steel			FSTB120060AQGA	lin metre
	Flat Sheet Tank Base 895 AQUAPLATE® steel			FSTB089560AQGA	lin metre
Single Sided Flat AQUAPLATE® steel (Lids)					
	Flat Sheet Tank Lid 735		AQUAPLATE® steel GA	FSTL073560AQGA	lin metre
	Flat Sheet Tank Lid 735		AQUAPLATE® steel DOC	FSTL073560AQDOC	lin metre
	Flat Sheet Tank Lid 735		AQUAPLATE® steel PEC	FSTL073560AQPEC	lin metre
	Flat Sheet Tank Lid 735		AQUAPLATE® steel PPB	FSTL073560AQPPB	lin metre
	Flat Sheet Tank Lid 735		AQUAPLATE® steel SUR	FSTL073560AQSUR	lin metre
	Flat Sheet Tank Lid 735		AQUAPLATE® steel WSP	FSTL073560AQWSP	lin metre
	Flat Sheet Tank Lid 895		AQUAPLATE® steel GA	FSTL089560AQGA	lin metre
	Flat Sheet Tank Lid 895		AQUAPLATE® steel DOC	FSTL089560AQDOC	lin metre
	Flat Sheet Tank Lid 895		AQUAPLATE® steel PEC	FSTL089560AQPEC	lin metre
	Flat Sheet Tank Lid 895		AQUAPLATE® steel PPB	FSTL089560AQPPB	lin metre
	Flat Sheet Tank Lid 895		AQUAPLATE® steel SUR	FSTL089560AQSUR	lin metre
	Flat Sheet Tank Lid 895		AQUAPLATE® steel WSP	FSTL089560AQWSP	lin metre
	Flat Sheet Tank Lid 1200		AQUAPLATE® steel GA	FSTL120060AQGA	lin metre
	Flat Sheet Tank Lid 1200		AQUAPLATE® steel PEC	FSTL120060AQPEC	lin metre
	Flat Sheet Tank Lid 1200		AQUAPLATE® steel PPB	FSTL120060AQPPB	lin metre
	Flat Sheet Tank Lid 1200		AQUAPLATE® steel SUR	FSTL120060AQSUR	lin metre
Orders under 10 sheets at customers risk.					
Order must be received prior to Wednesday for Wednesday rolling.					

ABBREVIATION CODE









DOC	DEEP OCEAN®	PEC	PALE EUCALYPT®	PPB	PAPERBARK®	WSP	WINDSPRAY®
SUR	SURFMIST®						
Tank Strainers		Aluminium Gauze, plastic surround 385mm diameter		TS	each		
							

ACCESSORIES				
Product Accessories	Details	Code	Finish	Unit
	General Accessories	Colour spray can 150g Shaddow Grey Spray Can	PP*** PPPR	each each
		CAUTION: Use of spray can on roofing and rainwater products will void Stramit Warranty. NOTE: METALLIC PAINT NOT AVAILABLE		
	Silicone Sealant (Clear)	SILCLR (Box 12)		each
	Silicone Sealant (Grey)	SILGRY (Box 12)		each
	Pop Rivets	PR3275*** PR3275AL	Colour Plain	per 100 per 100
		PR3275***BX PR3875ALBX	Colour Plain	box 1000 box 1000
Roof Ventilation				
	Rotary Ventilators 300mm	RV300MF RV300***	Mill Finish Colour	each each
	TurboBeam Skylight/Ventilator 250mm	RVTSKY250	Clear	each
	Rotary Ventilator Super Flow 300	RVSF300MF RVSF300***	Mill Finish Colour	each each
	Dektites®	Various sizes available		
	Dektite 50-70	DEK2BLK DEK2RED	Black Red	each each
	Dektite 50-127	DEK3BLK DEK3RED	Black Red	each each
	Dektite 75-175	DEK4BLK DEK4RED	Black Red	each each
	Dektite 100-200	DEK5BLK DEK5RED	Black Red	each each
	Dektite 125-230	DEK6BLK DEK6RED	Black Red	each each
	Dektite 150-300	DEK7BLK DEK7RED	Black Red	each each
Roof Razor				
	Roof RazorC3 InsSpcr 115mm	RRZCIS115GA	GA	per box 6
	Roof Razor InsSpcr 115mm	RRZIS115GA	GA	per box 6
	Roof RazorC3 InsSpcr 85mm	RRZCISGA	GA	per box 6
	Roof Razor InsSpcr 85mm	RRZISGA	GA	per box 6
	Roof Razor C3 60mm	RRZC1560GA	GA	per box 6
	Roof Razor 60mm	RRZ1560GA	GA	per box 6



FASTENERS – CYCLONIC AREAS (Class 4)				
Product Fasteners	Product Details	Code	Finish	Unit
Suit Stramit® Corrugated sheeting				
	14 x 50 Hex Head Type 17 Roof-Lok Ass. fixing to hardwood	S1450H17CA4 S1450H17CA***4	Plain Colour	per box 250 per box 250
	14 x 55 Cyclonic Roofzips Roof-Lok Ass. fixing to metal battens	S1455HZPCA4 S1455HZPCA***4	Plain Colour	per box 250 per box 250
	14 X 53 Hex Head Tek Roof-Lok Ass. fixing to steel	S1453HTCA4 S1453HTCA***4	Plain Colour	per box 250 per box 250
	14 x 55mm Cyclonic Roofzips Multiseal Ass. fixing to metal battens	S1455HZPB25 S1455HZPB25***	Plain Colour	per box 250 per box 250
	14 x 53mm Hex Head TekS Multiseal Ass. fixing to steel	S1453HTB25 S1453HTB25***	Plain Colour	per box 250 per box 250
Other Roof Screws				
	14 x 65 Hex Tek	S1465HT4	Plain	per box 1000
	Fixing to steel	S1465HT***4	Colour	per box 1000
	14 x 65 Hex Type 17	S1465H174	Plain	per box 1000
	Fixing to hardwood	S1465H17***4	Colour	per box 1000
Wall fixing to suit Stramit® Corrugated, Monoclad® & Longspan®				
	14 x 25 Hex Type 17 Fixing to hardwood	S1425H17 S1425H17***	Plain Colour	per box 500 per box 500
	14 x 25 Hex TekS Fixing to steel	S1425HT4 S1425HT4H S1425HT***4	Plain Plain Colour	per box 500 per bag 100 per box 500
Framing and Batten Fixing				
	14 x 25 Hex TekS No Neo Fixing to steel	S1425HTNN	Plain	per box 500
	14 x 22 Hex TekS No Neo Fixing to steel	S1422HTNN8 S1422HTNNH	Plain Plain	per box 500 per bag 100






PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

FASTENERS – CYCLONIC AREAS (Class 4)				
Product Fasteners	Product Details	Code	Finish	Unit
Suit Stramit Monoclad® & Stramit Longspan® sheeting				
	14 x 65 Hex Head Type 17 Roof-Lok Ass. fixing to hardwood (Crest fixing)	S1465H17CA4 S1465H17CA***4	Plain Colour	per box 250 per box 250
	14 x 55 Cyclonic Roofzips Roof-Lok Ass. fixing to metal battens (Crest fixing 0.55mm to 1.0mm)	S1455HZPCA4 S1455HZPCA***4	Plain Colour	per box 250 per box 250
	14 X 53 Hex Head TekS Roof-Lok Ass. fixing to steel (Crest fixing 1.0 to 5.0mm)	S1453HTCA4 S1453HTCA***4	Plain Colour	per box 250 per box 250
	14 x 65 Hex Head Type 17 25mm Multiseal Ass. fixing to hardwood (Ridge Cap Fixing)	S1465H17B254 S1465H17B25***	Plain Colour	per box 250 per box 250
	14 x 55mm Cyclonic Roofzips Multiseal Ass. fixing to metal battens (Ridge Cap Fixing 0.5 to 1.0mm)	S1455HZPB25 S1455HZPB25***	Plain Colour	per box 250 per box 250
	14 x 53mm Hex Head TekS Multiseal Ass. fixing to steel	S1453HTB25 S1453HTB25***	Plain Colour	per box 250 per box 250
FASTENERS (Class 5)				
Suit Stramit Monoclad® & Stramit Longspan® & Stramit® Corrugated sheeting				
	M6 x 50 Hex Head SDS – Roof Zips (Crest fixing to soft timber and steel)	S0650HZIP5 S0650HZIP***5	Plain Colour	per box 1000 per box 1000
	14 X 50 Hex Head Type 17 (Crest fixing to hardwood)	S1450H175 S1450H17***5	Plain Colour	per box 1000 per box 1000
	14 X 53 Hex Head Tek Crest fixing to steel (1.0mm – 5.0mm)	S1453HT5 S1453HT***5	Plain Colour	per box 1000 per box 1000
<ul style="list-style-type: none">Screws available in Multiseal assembly on applicationRecommended for use with COLORBOND® Ultra steel in both Category 4 (severe marine & industrial) and Category 5 (very severe marine & industrial) corrosive environments.				

SISALATION • REFLECTIVE INSULATION









Product Foil/Blanket/Batts/Wire	Product Details	Code	Roll Area	Cover	Unit
 <p>Sisalation 1.35m x 60m Rolls Double-sided fire retardant</p>	439 Light Anti-glare	FLLWAG600	81m ²	72m ²	per roll
	433 Medium Anti-glare	FLMWAG600	81m ²	72m ²	per roll
	453 Heavy Anti-glare	FLHWAG600	81m ²	72m ²	per roll
	456 Multipurpose Extra Heavy Duty	FLEHST600	81m ²	72m ²	per roll
 <p>Reflective Insulation</p>	Foil ReflectaCell 1.5 22.200	FLRC150200	30m ²	30m ²	per roll
	Foil ReflectaGuard 1.5 20.000	FLRG15200	30m ²	30m ²	per roll
	Foil ReflectaBreak 1.35 22.250	FLRB1352225	30m ²	30m ²	per roll
	Foil Reflectashed	FLRSD150300	45m ²	30m ²	per roll
	Astro Foil 22.500	FLASTR0225	30m ²	30m ²	per roll
	Foam Cell Multi Purpose 84AG (8.4mm x 1350mm x 22.25m)	FLCCFM84AG2225	30m ²	30m ²	per roll
	Foam Cell Resi Liner 40AG (4.0mm X 1350mm x 22.25m)	FLCCFR40AG2225	30m ²	30m ²	per roll
	Foam Cell Shed Liner 40AG (4.0mm X 1350mm x 22.25m)	FLCCFS40AG2225	30m ²	30m ²	per roll
	Foam Cell Shed Liner 40AG (4.0mm X 1350mm x 33.44m)	FLCCFS40AG3344	45m ²	45m ²	per roll
	Foam Cell Insulbreak 65 (6.5mm x 1350mm x 22.25m)	FLCCF650AG2225	30m ²	30m ²	per roll
	Foil BubbleCell 100AG	FLBCAG2225	30m ²	30m ²	per roll
Foil Tape	Foil Tape 48mm 50.0m	FLTAPE48500			each
	Foil Tape 75mm 50.0m	FLTAPE72500			each
	Foil Tracks	FLTACKB			per box 500

BLANKET • BATTS • WIRE












Product Foil/Blanket/Batts/Wire	Product Details	Code	Roll Area	Cover	Unit
 <p>PermaStop Building Blanket Lightweight foil adhered</p>	1200 x 15m x 60mm	R-1-4	BB60LW150	18m ²	18m ² per roll
	1200 x 20m x 60mm	R-1-4	BB60LW200	24m ²	24m ² per roll
	1200 x 15m x 75mm	R-1-8	BB75LW150	18m ²	18m ² per roll
	1200 x 10m x 100mm	R-2-5	BB100LW100	12m ²	12m ² per roll
 <p>PermaStop Building Blanket Medium weight foil adhered</p>	1200 x 15m x 55mm	R-1-4	BB55MW150	18m ²	18m ² per roll
	1200 x 20m x 55mm	R-1-3	BB55MW200	24m ²	24m ² per roll
	1200 x 15m x 75mm	R-1-8	BB75MW150	18m ²	18m ² per roll
	1200 x 10m x 100mm	R-2-5	BB100MW100	12m ²	12m ² per roll
 <p>PermaStop Building Blanket Heavyweight foil adhered</p>	1200 x 20m x 55mm	R-1-4	BB55HW200	24m ²	24m ² per roll
	1200 x 15m x 75mm	R-1-8	BB75HW150	18m ²	18m ² per roll
	1200 x 10m x 100mm	R-2-5	BB100HW100	12m ²	12m ² per roll
 <p>Glasswool Building Blanket Plain – 1200mm</p>	1200 x 30m x 55mm	R-1-4	BB55PLN300	39.6m ²	39.6m ² per roll
	1200 x 25m x 75mm	R-1-8	BB75PLN250	24m ²	24m ² per roll
	1200 x 10m x 100mm	R-2-5	BB100PLN100	12m ²	12m ² per roll
 <p>Ceiling Batts - Pink Batts</p>	C/Batt 1160 x 430 R2.5 Pk16	BBC430R25	8m ²		per pack
	C/Batt 1160 x 430 R3.0 Pk16	BBC430R30	8m ²		per pack
	C/Batt 1160 x 430 R3.5 Pk16	BBC430R35	8m ²		per pack
	C/Batt 1160 x 580 R3.5 Pk10	BBC580R35	7m ²		per pack
 <p>Roofing Wire</p>	300x150x1800 Safety Mesh* (2.0mm x 50m Roll)	WMAUS500	90m ²	82.5m ²	per roll
	150 x 13 x 230mm Verminwire* (0.56 x 46m roll)	WMVERMIN460			per roll
	*Stocked at Crestmead.				

All deliveries for the above products will incur and additional fee delivery fee for metro areas.
R-values shown are minimum rating and will increase depending on installation design.
Please refer to your Stramit representative regarding actual total R-value achieved.




















VALLEYS & RIDGES & EDGE ROLL							
Product	Product Details	Code	Finish	BMT	Unit		
Valleys, Ridges & Edge Roll							
	Stramit® Valley (Ribbed) (450mm) (Tile)	Brisbane Only	VRIB40ZA VRIB40X*** VRIB40GA	ZA COL GA	0.40 0.40 0.40	lin metre lin metre lin metre	
							
	Max Length 8.5m	Minimum length 1.5m					
Stramit® Valley (Rolled) (400mm)	Brisbane Only	VPR40ZA VPR40X*** VPR40GA	ZA COL GA	0.40 0.40 0.40	lin metre lin metre lin metre		
		(May not conform to Aust Standards)					
Stramit® Valley Gutter (Folded)							
		400mm 400mm 450mm 450mm	VPF55ZA VPF55X*** VPFL55ZA VPFL55X***	ZA COL ZA COL	0.55 0.55 0.55 0.55	lin metre lin metre lin metre lin metre	
		Max Length 8.0m	Minimum length 1.5m				
	Stramit® Roll Top Ridge (400mm)	Brisbane, Maryborough & Rockhampton	RTR40ZA RTR40X*** RTR40GA	ZA COL GA	0.40 0.40 0.40	lin metre lin metre lin metre	
							
		Max Length 8.5m	Minimum length 1.5m				
Stramit® Roll Top Ridge (450mm)		Brisbane	RTRL40ZA RTRL40X*** RTRL40GA	ZA COL GA	0.40 0.40 0.40	lin metre lin metre lin metre	
							
	Max Length 8.5m	Minimum length 1.5m					
	Stramit® Ridge Cap (3 Break) (400mm)	Brisbane Only	RRMC40ZA RRMC40X*** RRMC40GA	ZA COL GA	0.40 0.40 0.40	lin metre lin metre lin metre	
							
Lengths greater than 6.0m at customers own risk.							
Maryborough & Rockhampton		RFMC55ZA RFMC55X***	ZA COL	0.55 0.55	lin metre lin metre		
							
Max Length 8m MIn Length 1.5m		RFC55ZA RFC55X***	ZA COL	0.55 0.55	lin metre lin metre		
Stramit® Edge (Gable) Roll		38mm x 1.8m (Colour not stocked made to order 48 hour Lead Time)	ER38ZA18 ER38X***18 ER38GA18	ZA COL GA	0.40 0.40 0.40	length length length	
							
	50mm - Brisbane Only	ER50ZA ER50GA ER50X***	ZA GA COL	0.40 0.40 0.40	lin metre lin metre lin metre		
	min length 1m, max length 8m	ER50ZA20 ER50ZA30	ZA ZA	0.40 0.40	length length		
	Crestmead Stock	ER50ZA30 ER50X***30	ZA COL	0.40 0.40	length length		
	Maryborough Stock	ER50ZA20 ER50ZA30 ER50X***30	ZA ZA COL	0.40 0.40 0.40	length length length		
	Rockhampton Stock	ER50ZA20 ER50ZA30 ER50X***30	ZA ZA COL	0.40 0.40 0.40	length length length		
	*** Stock colour only available in CTG, MNR, SUR, JAS						















FASCIA • ACCESSORIES				
Product	Product Details	Code	Finish	Unit
Stramit® Fascia 	Cut to length - Brisbane, Maryborough & Rockhampton (Max length 8.5m) Minimum length 500mm	FBZA	ZA	lin metre
		FBX***	COL	lin metre
Accessories         	Versatile Rafter Bracket (Box 50)	FBVRBGA	GA	each
	Fascia Splice (Joiner) Plate	FBSPZA	ZA	each
	External Corner	FBECZA FBECX*** FBECT***	ZA COL Matt	each each each
	Internal Corner	FBICZA FBICX*** FBICT***	ZA COL Matt	each each each
	Snap Clip (Box 100)	FBSCZA	Coated	each
	Bat Clip	BATOC		each
	Barge Corner Left Hand	FBBCLZA FBBCLX*** FBBCLT***	ZA COL Matt	each each each
	Barge Corner Right Hand	FBBCRZA FBBCRX*** FBBCRT***	ZA COL Matt	each each each
	Barge Bracket (Box 100)	FBBBGA	GA	each
	Apex Joiner (Cover) Plate Not available in BSL, EVH, IST, JAS, LOF, MON, SBK	FBAJZA FBAJX*** FBAJT***	ZA COL Matt	each each each
Fasteners (AS3566 Class 3) 	6 x 25 Bugle Needle Point (For fixing to timber)	S0625BUGNP	Plain	Box 1000

GUTTERS • ACCESSORIES

Product Gutters/Accessories	Product Details	Code	Finish	Unit
Stramit Queenslander Quad® Hi-Front ECSA 8100mm ² 	Slotted	QQSZA	ZA	lin metre
	Plain	QQPZA	ZA	lin metre
	Slotted	QQSX***	COL	lin metre
	Plain	QQPX***	COL	lin metre
	Cut to length - Brisbane*, Rockhampton Minimum Length 500mm Maximum Length 8.5m) *oversize holes/slots manufactured in Brisbane & Townsville only			
Accessories				
	Concealed Bracket (Box 70)	QQSCBZA	ZA	each
	Stiffener Bracket (Box 150)	QQSSBZA	ZA	each
	Snap Clip (Box 100)	FBSCZA	Coated	each
	Spike Bracket	QQ175SPBZP QQ175SPBT*** QQ175SPBX***	Plated Matt Colour	each each each
	Stop End - Left	QQSSELZA QQSSELX*** QQSSELT***	ZA COL Matt	each each each
	Stop End - Right	QQSSERZA QQSSERX*** QQSSERT***	ZA COL Matt	each each each
	Fascia Board Gutter Spacer	FBGS	Coated	each
	Gutter Spacer Inserting Tool	FBGST	Coated	each
	Corners - Internal NOTE: Made to order 72hr Lead Time	QQSICZA QQSICX*** QQSICT***	ZA COL Matt	each each each
	Corners - External NOTE: Made to order 72hr Lead Time	QQSECZA QQSECX*** QQSECT***	ZA COL Matt	each each each
Stramit Compact Gutter® ECSA 5300mm ² 	Cut to length only	CGSZA CGSX***	ZA COL	lin metre lin metre
	Maximum length 8.5m Minimum length 500mm			
Accessories				
	Concealed Bracket (Box 80)	CGCBZA	ZA	each
	Stiffener Bracket (Box 50)	CGSBZA	ZA	each
	Snap Clip (Box 100)	FBSCZA	Coated	each
	Stop End	CGSEZA CGSEX***	ZA COL	each each
Stramit Compact® Barge Capping 	Cut to length only	CGBZA CGBX***	ZA COL	lin metre lin metre
	Maximum length 8.5m Minimum length 500mm			

GUTTERS • ACCESSORIES

Product Gutters/Accessories	Product Details	Code	Finish	Unit
Stramit® M Pattern ECSA 7900mm ² 	Cut to length - Brisbane, Maryborough & Rockhampton Max. Length 8.5m Minimum length 500mm	FGMSZA FGMSX***	ZA COL	lin metre lin metre
Accessories				
	Concealed Bracket (Box 50) (GPM) (Box 20)	FGMCBZA FGMCBX***	ZA COL	each each
	Stiffener Bracket (Box 150)	FGMSBZA	ZA	each
	Snap Clip (Box 100)	FBSCZA	Coated	each
	Stop End	FGSEZA FGSEX***	ZA COL	each each
	Corners (Angles) - Internal NOTE: Colour made to order 72 hr lead time	FGMICZA FGMICX***	ZA COL	each each
	Corners (Angles) - External NOTE: Colour made to order 72 hr lead time	FGMECZA FGMECX***	ZA COL	each each
Stramit® M Pattern Barge Capping 	Cut to length Max length 8.5m Minimum length 500mm	FGBCZA FGBCX***	ZA COL	lin metre lin metre
Stramit® S Pattern 	Cut to length Max length 8.5m NOTE: 48hr lead time, refer to Production Days Crestmead page 5	FGSSZA FGSSX*** FGSSZA60 FGSSXCLC60 FGSSXSUR60	ZA COL ZA COL COL	lin metre lin metre each each each
ECSA 7900mm ²	*See page 4 for colour availability.			
Accessories				
	Concealed Bracket	FGSCBZA	ZA	each
	Gutter Stiffener (Overstrap)	FGSSBZA	ZA	each
	Stop End	FGSEZA FGSEX***	ZA COL	each each

GUTTERS • ACCESSORIES

Product Gutters/Accessories	Product Details	Code	Finish	Unit
Stramit® Quad 150 Lo-Front ECSA 8500mm ² 	Cut to length - Brisbane Only	QQ150ZA	ZA	lin metre
	Minimum Length 500mm	QQ150X***	COL	lin metre
	Maximum Length 8.5m	QQ150GA	GA	lin metre
	Maryborough stock	QQ150ZA60	ZA	length
	Rockhampton stock	QQ150ZA40 QQ150ZA60 QQ150XCTG60 QQ150XMNR60 QQ150XSUR60	ZA ZA COL COL COL	length length length length length
Accessories	Concealed Bracket (Box 100)	QQ150CBZA	ZA	each
	Stiffener Bracket (Box 150)	QQ150SBZA	ZA	each
	External (T-Head) Bracket (Box 50)	QQ150EBGA	GA	each
	Snap Clip (Box 100)	FBSCZA	Coated	each
	Spike Bracket (Box 25) (Box 200)	QQ150SPBX*** QQ150SPBZP QQ150SPBT***	Colour Plated Matt	each each each
	Overstrap Bracket	QQ150OBZA	ZA	each
	Overstrap 390 x 40mm	QQ0SZA	ZA	each
	Stop End (Left)	QQ150SELZA QQ150SELX*** QQ150SELT*** QQ150SELGA	ZA COL Matt GA	each each each each
	Stop End (Right)	QQ150SERZA QQ150SERX*** QQ150SRLT*** QQ150SERGA	ZA COL Matt GA	each each each each
	Corners Angles - (Internal)	QQ150ICZA QQ150ICX*** QQ150ICGA	ZA COL GA	each each each
	Corners Angles - (External)	QQ150ECZA QQ150ECX*** QQ150ECGA	ZA COL GA	each each each
	Return End (Full Stop End) Left Not stocked in EVH, IST, JAS, MON	QQ150RELZA QQ150RELX*** QQ150RELGA	ZA COL GA	each each each
	Return End (Full Stop End) Right Not stocked in EVH, IST, JAS, MON	QQ150RERZA QQ150RERX*** QQ150RERGA	ZA COL GA	each each each










Note: Non-stocked colours are available made to order 72 hour lead time.

GUTTERS • ACCESSORIES









Product Gutters/Accessories	Product Details	Code	Finish	Unit
Stramit® Quad 175 ECSA 14800mm ² 	Cut to length - Brisbane Only	QQ175ZA	ZA	lin metre
	Max. Length 8.5m	QQ175X***	COL	lin metre
		QQ175GA	GA	lin metre
	Minimum length 500mm			
Accessories	Concealed Bracket (Box 50)	QQ175CBZA	ZA	each
	Stiffener Bracket (Box 150)	QQ175SBZA	ZA	each
	Snap Clips (Box 100)	FBSCZA	Coated	each
	Spike Brackets	QQ175SPBX*** QQ175SPBZP	Colour Plated	each each
	Overstrap Bracket (Box 50)	QQ175OBGA	GA	each
	Overstraps 390 x 40mm	QQ0SZA	ZA	each
	Stop End - Left	QQ175SELZA QQ175SELX*** QQ175SELT*** QQ175SELGA	ZA COL Matt GA	each each each each
	Stop End - Right	QQ175SERZA QQ175SERX*** QQ175SERT*** QQ175SERGA	ZA COL Matt GA	each each each each
	Corners (Angles) - Internal Not stocked in IST, JAS, MON	QQ175ICZA QQ175ICX*** QQ175ICGA	ZA COL GA	each each each
	Corners (Angles) - External Not stocked in IST, JAS, MON	QQ175ECZA QQ175ECX*** QQ175ECGA	ZA COL GA	each each each
	Return End (Full Stop End) Left Not stocked in EVH, IST, JAS, MON	QQ175RELZA QQ175RELX***	ZA COL	each each
	Return End (Full Stop End) Right Not stocked in EVH, IST, JAS, MON	QQ175RERZA QQ175RERX***	ZA COL	each each

Note: Non-stocked colours are available made to order 72 hour lead time.


GUTTERS • ACCESSORIES

Product Gutters/Accessories	Product Details	Code	Finish	Unit
Stramit® Quad 100	1.8m Stock Length <i>NOTE: Stock Ex Brisbane only.</i>	QQ100GA18	GA	length
				
ECSA 3800mm ²				
Accessories	Overstrap Bracket	QQ1000BGA	GA	each
				
				
Stop Ends (Hand made)		QQ100SELGA QQ100SERGA	GA GA	each each
Stramit® Quad 125	6.0m Stock Length	QQ125ZA60	ZA	length
				
ECSA 5900mm ²				
Accessories	External (T-Head) Bracket (Box 100)	QQ125EBGA	GA	each
				
				
Spike Brackets (Box 25)		QQ125SPBGA	GA	each
				
Stop End - Left Stop End - Right		QQ125SELZA QQ125SERZA	ZA ZA	each each
				
Corners (Angles) - Internal Corners (Angles) - External		QQ125ICZA QQ125ECZA	ZA ZA	each each
				
Return End (Full Stop End) -Left Return End (Full Stop End) -Right		QQ125RELZA QQ125RERZA	ZA ZA	each each

GUTTERS • ACCESSORIES

Product Gutters/Accessories	Size	Finish	Ordering Code	Unit
Stramit® Flatback Half Round Gutter ECSA 7800mm ²				
				
Plain	150	ZA	HRGFB150PZA HRGFB150PX***	lin metre lin metre
Slotted Ex Brisbane	150	Slotted	HRGFB150SZA HRGFB150SX***	lin metre lin metre
Accessories 				
Universal Stop End to suit	150 150	ZA COL Matt	HRG150SEUZA HRG150SEUX*** HRG150SEUT***	each each each
Corners (Angles – Internal)	150 150	ZA COL	HRGFB150ICPZA HRGFB150ICPX***	each each
Corners (Angles – External)	150 150	ZA COL	HRGFB150ECPZA HRGFB150ECPX***	each each
Stiffener Bracket	150	ZA	HRGFB150SBZA	each
External Bracket for Flatback Half Round A1	150 150	GA COL	HRGFB150EBGA HRGFB150EB***	each each
<i>*minimum order 30 or powdercoat fee applies - 10 day lead time</i>				
Snap Clip (100/box)		Coated	FBSCZA	each
Flatback HR Gutter Concealed Bracket	150	ZA	HRGFB150CSBZA	each
Cast Angles				
				
Cast Angles (Ext) To suit Flatback	150 150	Plain COL*	HRGFB150CAEMF HRGFB150CAEX***	each each
Cast Angles (Int) To suit Flatback	150 150	Plain COL*	HRGFB150CAIMF HRGFB150CAIX***	each each
				
Cast Angles (Ext) To suit Half Round	150 150	Plain COL*	HRG150CAEMF HRG150CAEX***	each each
Cast Angles (Int) To suit Half Round	150 150	Plain COL*	HRG150CAIMF HRG150CAIX***	each each
<i>*surcharge applies for minimum order quantity. Lead time 10 working days</i>				
150mm Half Round Gutter ESCA 7700mm ²				
				
Plain	150 150	ZA COL	HRGR150PZA HRGR150PX***	lin metre lin metre
Slotted	150 150	ZA COL	HRGR150SZA HRGR150SX***	lin metre lin metre
Accessories 				
150mm Half Round Gutter Bracket	150 150	Plain COL Matt	HRG150EBMF HRG150EBX*** HRG150EBT***	each each each
				
Universal Stop End to suit Flatback and Half Round Gutter	150 150	ZA COL	HRG150SEUZA HRG150SEUX***	each each
				
Corners (Angles – Internal)	150 150	ZA COL	HRG150ICPZA HRG150ICPX***	each each
Corners (Angles – External)	150 150	ZA COL	HRG150ECPZA HRG150ECPX***	each each


GUTTER ACCESSORIES

Product Downpipe/Accessories	Product Details	Size	Finish	Ordering Code	Unit
	PVC Suit 150HR/90mm DP		PVC	PVCHRG150NZ090	each
	Suit 150HR/100mm DP		PVC	PVCHRG150NZ100	each
	Cast		ZA	HRG10050NOZZA	each
			COL	HRG10050NOZX***	each
			ZA	HRG10075NOZZA	each
			COL	HRG10075NOZX***	each


PVC DOWNPIPES AND ACCESSORIES


Product Downpipe/Accessories	Product Details	Size	Finish	Ordering Code	Unit
	PVC Downpipe 90 6.000m			PVCDP9060	each
	PVC Clip 90			PVCCLP90	each
	PVC Extended Clip 90			PVCECLP90	each
	PVC Downpipe Elbow 90 22.5 Deg			PVCELB9022	each
	PVC Downpipe Elbow 90 45 Deg			PVCELB9045	each
	PVC Downpipe Elbow 90 90 Deg			PVCELB9090	each
	PVC Nozzle 90			PVCNOZ90	each
	PVC Adaptor 100 x 50 - 90 Round			PVCADP1005090	each
	PVC Adaptor 100 x 80 - 90 Round			PVCADP1008090	each

HALF ROUND GUTTER & ACCESSORIES

Product Gutters/Accessories	Product Detail	Code	Unit
	100	HRG100/ZA/X***	lin metre
	175	HRG175/ZA/X***	lin metre
	200	HRG200/ZA/X***	lin metre
	225	HRG225/ZA/X***	lin metre
	250	HRG250/ZA/X***	lin metre
	300	HRG300/ZA/X***	lin metre
	350	HRG350/ZA/X***	lin metre
	400	HRG400/ZA/X***	lin metre
	450	HRG450/ZA/X***	lin metre
	Lead time 3-5 working days.		
	Also available in COLORBOND® Stainless Steel, Copper, COLORBOND® Metallic steel and COLORBOND® Ultra steel. Please contact your local Stramit representative for details.		


Max Length 6.0
Gauge of gutter 0.55

Fabricated Corners to suit Half Round Gutter 	150mm 90° Ext/Int Corner	HRG150IC/EC/ZA/X***	each
	175mm 90° Ext/Int Corner	HRG175IC/EC/ZA/X***	each
	200mm 90° Ext/Int Corner	HRG200IC/EC/ZA/X***	each
	225mm 90° Ext/Int Corner	HRG225IC/EC/ZA/X***	each
	250mm 90° Ext/Int Corner	HRG250IC/EC/ZA/X***	each
	300mm 90° Ext/Int Corner	HRG300IC/EC/ZA/X***	each
	350mm 90° Ext/Int Corner	HRG350IC/EC/ZA/X***	each
	400mm 90° Ext/Int Corner	HRG400IC/EC/ZA/X***	each
	450mm 90° Ext/Int Corner	HRG450IC/EC/ZA/X***	each
	Lead time 3-5 working days.		

Stop End to suit Half Round Gutter 	175mm H/Rd Stop End	HRG175SE/ZA/X***	each
	200mm H/Rd Stop End	HRG200SE/ZA/X***	each
	225mm H/Rd Stop End	HRG225SE/ZA/X***	each
	250mm H/Rd Stop End	HRG250SE/ZA/X***	each
	300mm H/Rd Stop End	HRG300SE/ZA/X***	each
	350mm H/Rd Stop End	HRG350SE/ZA/X***	each
	400mm H/Rd Stop End	HRG400SE/ZA/X***	each
	450mm H/Rd Stop End	HRG450SE/ZA/X***	each



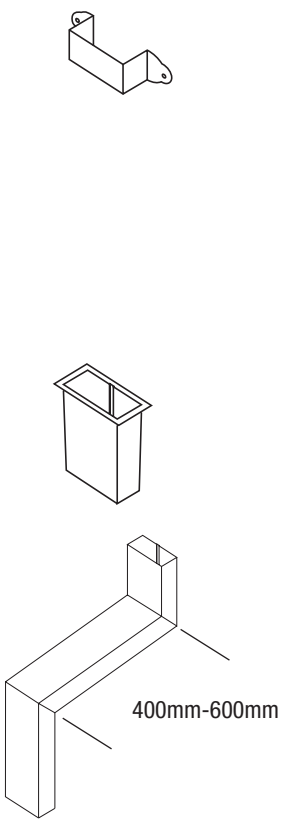
Nozzles to suit Half Round Gutter 	90mm H/Rd Nozzle	HRG90NOZZA/X***	each
	Suits 100, 115, 125, 150, 175 & 200 gutters		
	100mm H/Rd Nozzle	HRG100NOZZA/X***	each
	Suits 125, 150, 175, 200, 225, 250 & 300 gutters		
	125mm H/Rd Nozzle	HRG125NOZZA/X***	each
	Suits 150, 175, 200, 225, 250 & 300 gutters		
	150mm H/Rd Nozzle	HRG150NOZZA/X/T***	each
	Suits 175, 200, 225, 250 & 300 gutters		
	Copper & COLORBOND® Stainless Steel made to order POA.		
	Products manufactured to order are non-returnable.		
	Lead time 3-5 working days.		

Half Round Brackets Type A1 	100mm x 1.6mm	HRG100BA1GA/X***	each
	150mm x 1.6mm	HRG150BA1GA/X***	each
	150mm x 1.6mm	HRG150BA1SS	each
	*Lead time 5 working days		




Half Round Brackets Type A4 Heavy Duty Aluminium (H/Duty required 200mm & over) 	150mm	HRG150BA4ALPR/X***	each
	175mm	HRG175BA4ALPR/X***	each
	200mm	HRG200BA4ALPR/X***	each
	225mm	HRG225BA4ALPR/X***	each
	250mm	HRG250BA4ALPR/X***	each
	300mm	HRG300BA4ALPR/X***	each
	350mm	HRG350BA4ALPR	each
	400mm	HRG400BA4ALPR	each
	450mm	HRG450BA4ALPR	each
	Setup Charge	PDCOATSU	each
	All manufactured to order. Check lead times.		
	Powder Coating set up fee applies for under 20 brackets.		
	Brackets other than shown POA.		
	Other Bead Profiles available on request. Check with Sales on lead time.		

*** Gutter also available in COLORBOND® Stainless Steel, Copper, COLORBOND® Metallic steel and COLORBOND® Ultra steel.**
ALL POWDER COATED BRACKETS ARE NOT RECOMMENDED FOR COASTAL, MARINE OR SEVERE CORROSIVE ENVIRONMENTS.

DOWNPIPE • ACCESSORIES

Product Downpipe/Accessories	Product Details	Code	Finish	BMT	Unit
	100 x 75 x 1.8m	DP10075ZA18	ZA	0.40	length
		DP10075X***18	COL	0.40	length
		DP10075T***18	Matt	0.40	length
	100 x 75 x 2.4m	DP10075ZA24	ZA	0.40	length
		DP10075X***24	COL	0.40	length
		DP10075T***24	Matt	0.40	length
	100 x 75 x 3.0m	DP10075ZA30	ZA	0.40	length
		DP10075X***30	COL	0.40	length
		DP10075T***30	Matt	0.40	length
	100 x 50 x 1.8m	DP10050MZA18	ZA	0.55	length
		DP10050MX***18	COL	0.55	length
	100 x 75 x 1.8m	DP10075MZA18	ZA	0.55	length
		DP10075MX***18	COL	0.55	length
		DP10075MGA18	GA	0.55	length
		DP10075MGA24	GA	0.55	length
	100 x 75 x 2.4M				
	100 x 100 x 1.8m	DP100100MZA18	ZA	0.55	length
		DP100100MX***18	COL	0.55	length
	150 x 100 x 1.8m	DP150100MZA18	ZA	0.55	length
		DP150100MX***18	COL	0.55	length
		DP150100MGA18	GA	0.55	length
Note: Made to order 72 hour lead time. Other sizes and lengths available on request.					
	Strap Astragal 100 x 50	AST10050ZA	ZA	0.40	each
		AST10050X***	COL	0.40	each
		AST10050GA	GA	0.40	each
	Strap Astragal 100 x 75	AST10075ZA	ZA	0.40	each
		AST10075X***	COL	0.40	each
		AST10075T***	Matt	0.40	each
		AST10075GA	GA	0.40	each
	Strap Astragal 100 x 100	AST100100ZA	ZA	0.40	each
		AST100100X***	COL	0.40	each
		AST100100GA	GA	0.40	each
	Strap Astragal 150 x 100	AST150100ZA	ZA	0.40	each
		AST150100X***	COL	0.40	each
		AST150100GA	GA	0.40	each
	Nozzle (Drop or Pop) 100 x 50	NOZ10050ZA	ZA	0.40	each
		NOZ10050X***	COL	0.40	each
		NOZ10050GA	GA	0.40	each
	Nozzle (Drop or Pop) 100 x 75	NOZ10075ZA	ZA	0.40	each
		NOZ10075X***	COL	0.40	each
		NOZ10075GA	GA	0.40	each
	Nozzle (Drop or Pop) 100 x 100	NOZ100100ZA	ZA	0.40	each
		NOZ100100X***	COL	0.40	each
		NOZ100100GA	GA	0.40	each
	Nozzle (Drop or Pop) 150 x 100	NOZ150100ZA	ZA	0.40	each
		NOZ150100X***	COL	0.40	each
		NOZ150100GA	GA	0.40	each
	NOTE: COLORBOND® steel Astragals & Nozzles are made to order 72 hour lead time				
	Adjustable Offset 100 x 75	OS10075ZA	ZA	0.40	each
	Suit Stramit® Downpipe	OS10075X***	COL	0.40	each
		OS10075GA	GA	0.40	each
NOTE: COLORBOND® steel Offset are made to order 72 hour lead time					

DOWNPIPE • ACCESSORIES

Product Fascia/Accessories	Product Details	Code	Finish	BMT	Unit
	Stramit® Downpipe Custom Made				
	Round Adjustable	90mm	OS90ZA	ZA	each
	Standard Offsets		OS90X***	COL	each
		100mm	OS100ZA	ZA	each
			OS100X***	COL	each
		150mm	OS150ZA	ZA	each
			OS150X***	COL	each
Also available in stainless steel and copper.					
	Tapered Round	75 x 1.8m	DP75MZA18	ZA	0.55
					length
		90 x 1.8m	DP90MZA18	ZA	0.55
			DP90MX***18	COL	0.55
					length
		90 x 2.4m	DP90MZA24	ZA	0.55
			DP90MX***24	COL	0.55
					length
		100 x 1.8m	DP100MX***18	COL	0.55
			DP100MZA18	ZB	0.55
			DP100MGA18	GA	0.55
					length
		100 x 2.4m	DP100MZA24	ZA	0.55
			DP100MX***24	COL	0.55
			DP100MGA24	GA	0.55
					length
		125 x 1.8m	DP125MZA18	ZA	0.55
			DP125MX***18	COL	0.55
			DP125MGA18	GA	0.55
					length
		150 x 1.8m	DP150MZA18	ZA	0.55
			DP150MX***18	COL	0.55
			DP150MGA18	GA	0.55
					length

All sizes & finishes are available upon request - Made to order 72hr lead time.

DOWNPIPE • ACCESSORIES

Product Downpipe/Accessories	Product Details	Code	Finish	BMT	Unit
	Strap / Astragal 75	AST75ZA	ZA	0.40	each
		AST75GA	GA	0.40	each
	Strap / Astragal 85	AST90ZA	ZA	0.40	each
		AST90X***	COL	0.40	each
		AST90GA	GA	0.40	each
	Strap / Astragal 100	AST100ZA	ZA	0.40	each
		AST100X***	COL	0.40	each
		AST100GA	GA	0.40	each
	Strap / Astragal 125	AST125ZA	ZA	0.40	each
		AST125X***	COL	0.40	each
		AST125GA	GA	0.40	each
	Strap / Astragal 150	AST150ZA	ZA	0.40	each
		AST150X***	COL	0.40	each
		AST150GA	GA	0.40	each

NOTE: COLORBOND® steel Astragals only stocked in 85mm & 100mm. All other COLORBOND® steel sizes are made to order 72hr lead time.

	Nozzle (Drop or Pop) 50	NOZ50ZA	ZA	0.40	each
		NOZ50GA	GA	0.40	each
	Nozzle (Drop or Pop) 75	NOZ75ZA	ZA	0.40	each
		NOZ75X***	COL	0.40	each
		NOZ75GA	GA	0.40	each
	Nozzle (Drop or Pop) 85	NOZ85ZA	ZA	0.40	each
		NOZ85X***	COL	0.40	each
		NOZ85GA	GA	0.40	each
	Nozzle (Drop or Pop) 100	NOZ100ZA	ZA	0.40	each
		NOZ100X***	COL	0.40	each
		NOZ100GA	GA	0.40	each
	Nozzle (Drop or Pop) 125	NOZ125ZA	ZA	0.40	each
		NOZ125X***	COL	0.40	each
		NOZ125GA	GA	0.40	each
	Nozzle (Drop or Pop) 150	NOZ150ZA	ZA	0.40	each
		NOZ150X***	COL	0.40	each
		NOZ150GA	GA	0.40	each
	Universal Nozzle Suits 100 x 75 & 90 Round	NOZUNIZA	ZA		each
	NOTE: COLORBOND® steel Nozzles are made to order 72 hour lead time				
	PVC Nozzle 90mm	PVCNOZ90			each
	Crimp Bends 75 x 45° (not sealed) 75 x 90°	CB7545ZA	ZA	0.55	each
		CB7590ZA	ZA	0.55	each
	Crimp Bends 85 x 45° (not sealed) 85 x 90°	CB8545ZA	ZA	0.55	each
		CB8590ZA	ZA	0.55	each
	Crimp Bends 100 x 45° (not sealed) 100 x 90°	CB10045ZA	ZA	0.55	each
		CB10090ZA	ZA	0.55	each

CUSTOM FLASHINGS – ORDERING PROCEDURE

ORDERING PROCEDURE

1. Choose the appropriate profile type, material and finish
2. If Colour, nominate the side on which colour is required
3. Nominate the dimensions by the letters shown on diagrams
4. Nominate the angles on all bends
5. Nominate the quantity and length of profile

EXAMPLE

1. Type 4, Colour Surfmist®
2. Colour on side C
3. A – 15mm, B – 100mm, C – 150mm, D – 150mm
4. COL = 90°, CD = 90°, AB = 65°
5. 1 off, 2550mm

Custom Flashing orders must be faxed, Custom Flashings will not be taken over the phone.

Refer to page 14 for Custom Flashing Detail Sheet.

Internal Bends minimum 15mm.

Maximum length manufactured is 8.000m.

Type 1 	Type 2 	Type 3 	Type 4 	Type 5 	Type 6
Type 7 	Type 8 	Type 9 	Type 10 	Type 11 	Type 12
Type 13 	Type 14 	Type 15 	Type 16 	Type 17 	Type 18
Type 19 	Type 20 	Type 21 	Type 22 	Type 23 	Type 24
Type 25 	Type 26 	Type 27 	Type 28 	Type 29 	Type 30

NOTE: These products are made to order, NON RETURNABLE

**NOTE: Length Tolerance is - 0 + 15mm. Please advise if flashing length is critical.
Standard Bend Tolerance is ± 2.0mm.**

CUSTOM FLASHINGS INFORMATION

METRIC CONVERSION CHART	
METRIC THICKNESS	EQUIVALENT GAUGE
0.4mm	26G
0.6mm	24G
0.8mm	22G
1.0mm	20G
1.2mm	18G
1.6mm	16G
2.0mm	14G
2.5mm	12G
3.0mm	10G

NOTE

- Squash fold = 2 bends
- Minimum fold = 10-15mm (depending on profile)
- Girth under 100mm maximum length 3600. Over 100mm maximum length 8000.

Subject to suitability of shape and delivery arrangements.
See Delivery Details (see Page 6&7)

- Stramit® Custom Flashings have a minimum charged length of 1 linear metre - if you order lengths less than a linear metre the charge is still for 1 linear metre regardless of multiple lengths being ordered.
- Flat sheets cannot be supplied as a "roll up"

Due to the nature of Flat Sheet, we cannot guarantee this product by normal transport without damage. Therefore, we strongly recommend that orders for Flat Sheet be collected from our factory. However, if you still require us to deliver Flat Sheet, **WE WILL NOT ACCEPT ANY RESPONSIBILITY FOR DAMAGE WHICH MAY OCCUR**. Alternatively, we can supply Flat Sheet with a Timber Pallet which will incur a surcharge.

Ask for our Stramit Flashing Detail Pad (see page 48)

CUSTOM FLASHINGS

ZINCALUME® STEEL 0.40 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF040B00ZA	CF040B01ZA	CF040B02ZA	CF040B03ZA	CF040B04ZA	CF040B05ZA	CF040B06ZA
101-150 (C)	CF040C00ZA	CF040C01ZA	CF040C02ZA	CF040C03ZA	CF040C04ZA	CF040C05ZA	CF040C06ZA
151-200 (D)	CF040D00ZA	CF040D01ZA	CF040D02ZA	CF040D03ZA	CF040D04ZA	CF040D05ZA	CF040D06ZA
201-250 (E)	CF040E00ZA	CF040E01ZA	CF040E02ZA	CF040E03ZA	CF040E04ZA	CF040E05ZA	CF040E06ZA
251-300 (F)	CF040F00ZA	CF040F01ZA	CF040F02ZA	CF040F03ZA	CF040F04ZA	CF040F05ZA	CF040F06ZA
301-350 (G)	CF040G00ZA	CF040G01ZA	CF040G02ZA	CF040G03ZA	CF040G04ZA	CF040G05ZA	CF040G06ZA
351-400 (H)	CF040H00ZA	CF040H01ZA	CF040H02ZA	CF040H03ZA	CF040H04ZA	CF040H05ZA	CF040H06ZA
401-500 (J)	CF040J00ZA	CF040J01ZA	CF040J02ZA	CF040J03ZA	CF040J04ZA	CF040J05ZA	CF040J06ZA
501-600 (L)	CF040L00ZA	CF040L01ZA	CF040L02ZA	CF040L03ZA	CF040L04ZA	CF040L05ZA	CF040L06ZA
601-700 (N)	CF040N00ZA	CF040N01ZA	CF040N02ZA	CF040N03ZA	CF040N04ZA	CF040N05ZA	CF040N06ZA
701-800 (P)	CF040P00ZA	CF040P01ZA	CF040P02ZA	CF040P03ZA	CF040P04ZA	CF040P05ZA	CF040P06ZA
801-900 (R)	CF040R00ZA	CF040R01ZA	CF040R02ZA	CF040R03ZA	CF040R04ZA	CF040R05ZA	CF040R06ZA
901-1000 (T)	CF040T00ZA	CF040T01ZA	CF040T02ZA	CF040T03ZA	CF040T04ZA	CF040T05ZA	CF040T06ZA
1001-1100 (V)	CF040V00ZA	CF040V01ZA	CF040V02ZA	CF040V03ZA	CF040V04ZA	CF040V05ZA	CF040V06ZA
1101-1200 (X)	CF040X00ZA	CF040X01ZA	CF040X02ZA	CF040X03ZA	CF040X04ZA	CF040X05ZA	CF040X06ZA

0.40 BMT flashing may not conform with Australian Standards

GALVANISED 0.40 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF040B00GA	CF040B01GA	CF040B02GA	CF040B03GA	CF040B04GA	CF040B05GA	CF040B06GA
101-150 (C)	CF040C00GA	CF040C01GA	CF040C02GA	CF040C03GA	CF040C04GA	CF040C05GA	CF040C06GA
151-200 (D)	CF040D00GA	CF040D01GA	CF040D02GA	CF040D03GA	CF040D04GA	CF040D05GA	CF040D06GA
201-250 (E)	CF040E00GA	CF040E01GA	CF040E02GA	CF040E03GA	CF040E04GA	CF040E05GA	CF040E06GA
251-300 (F)	CF040F00GA	CF040F01GA	CF040F02GA	CF040F03GA	CF040F04GA	CF040F05GA	CF040F06GA
301-350 (G)	CF040G00GA	CF040G01GA	CF040G02GA	CF040G03GA	CF040G04GA	CF040G05GA	CF040G06GA
351-400 (H)	CF040H00GA	CF040H01GA	CF040H02GA	CF040H03GA	CF040H04GA	CF040H05GA	CF040H06GA

0.40 BMT flashing may not conform with Australian Standards

Girths over 400 refer to page 42 Galvanised 0.55 BMT

COLORBOND® STEEL 0.40 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF040B00X***	CF040B01X***	CF040B02X***	CF040B03X***	CF040B04X***	CF040B05X***	CF040B06X***
101-150 (C)	CF040C00X***	CF040C01X***	CF040C02X***	CF040C03X***	CF040C04X***	CF040C05X***	CF040C06X***
151-200 (D)	CF040D00X***	CF040D01X***	CF040D02X***	CF040D03X***	CF040D04X***	CF040D05X***	CF040D06X***
201-250 (E)	CF040E00X***	CF040E01X***	CF040E02X***	CF040E03X***	CF040E04X***	CF040E05X***	CF040E06X***
251-300 (F)	CF040F00X***	CF040F01X***	CF040F02X***	CF040F03X***	CF040F04X***	CF040F05X***	CF040F06X***
301-350 (G)	CF040G00X***	CF040G01X***	CF040G02X***	CF040G03X***	CF040G04X***	CF040G05X***	CF040G06X***
351-400 (H)	CF040H00X***	CF040H01X***	CF040H02X***	CF040H03X***	CF040H04X***	CF040H05X***	CF040H06X***

0.40 BMT flashing may not conform with Australian Standards

Girths over 400 refer to page 42 COLORBOND® steel 0.55 BMT



BRISBANE
TEL (07) 3803 9999

MARYBOROUGH
TEL (07) 4123 9500

ROCKHAMPTON
TEL (07) 4921 5600



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

CUSTOM FLASHINGS

ZINCALUME® STEEL 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	8
001-100 (B)	CF055B00ZA	CF055B01ZA	CF055B02ZA	CF055B03ZA	CF055B04ZA	CF055B05ZA	CF055B06ZA	CF055B07ZA	CF055B08ZA
101-150 (C)	CF055C00ZA	CF055C01ZA	CF055C02ZA	CF055C03ZA	CF055C04ZA	CF055C05ZA	CF055C06ZA	CF055C07ZA	CF055C08ZA
151-200 (D)	CF055D00ZA	CF055D01ZA	CF055D02ZA	CF055D03ZA	CF055D04ZA	CF055D05ZA	CF055D06ZA	CF055D07ZA	CF055D08ZA
201-250 (E)	CF055E00ZA	CF055E01ZA	CF055E02ZA	CF055E03ZA	CF055E04ZA	CF055E05ZA	CF055E06ZA	CF055E07ZA	CF055E08ZA
251-300 (F)	CF055F00ZA	CF055F01ZA	CF055F02ZA	CF055F03ZA	CF055F04ZA	CF055F05ZA	CF055F06ZA	CF055F07ZA	CF055F08ZA
301-350 (G)	CF055G00ZA	CF055G01ZA	CF055G02ZA	CF055G03ZA	CF055G04ZA	CF055G05ZA	CF055G06ZA	CF055G07ZA	CF055G08ZA
351-400 (H)	CF055H00ZA	CF055H01ZA	CF055H02ZA	CF055H03ZA	CF055H04ZA	CF055H05ZA	CF055H06ZA	CF055H07ZA	CF055H08ZA
401-500 (J)	CF055J00ZA	CF055J01ZA	CF055J02ZA	CF055J03ZA	CF055J04ZA	CF055J05ZA	CF055J06ZA	CF055J07ZA	CF055J08ZA
501-600 (L)	CF055L00ZA	CF055L01ZA	CF055L02ZA	CF055L03ZA	CF055L04ZA	CF055L05ZA	CF055L06ZA	CF055L07ZA	CF055L08ZA
601-700 (N)	CF055N00ZA	CF055N01ZA	CF055N02ZA	CF055N03ZA	CF055N04ZA	CF055N05ZA	CF055N06ZA	CF055N07ZA	CF055N08ZA
701-800 (P)	CF055P00ZA	CF055P01ZA	CF055P02ZA	CF055P03ZA	CF055P04ZA	CF055P05ZA	CF055P06ZA	CF055P07ZA	CF055P08ZA
801-900 (R)	CF055R00ZA	CF055R01ZA	CF055R02ZA	CF055R03ZA	CF055R04ZA	CF055R05ZA	CF055R06ZA	CF055R07ZA	CF055R08ZA
901-1000 (T)	CF055T00ZA	CF055T01ZA	CF055T02ZA	CF055T03ZA	CF055T04ZA	CF055T05ZA	CF055T06ZA	CF055T07ZA	CF055T08ZA
1001-1100 (V)	CF055V00ZA	CF055V01ZA	CF055V02ZA	CF055V03ZA	CF055V04ZA	CF055V05ZA	CF055V06ZA	CF055V07ZA	CF055V08ZA
1101-1200 (X)	CF055X00ZA	CF055X01ZA	CF055X02ZA	CF055X03ZA	CF055X04ZA	CF055X05ZA	CF055X06ZA	CF055X07ZA	CF055X08ZA

GALVANISED 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	8
001-100 (B)	CF055B00GA	CF055B01GA	CF055B02GA	CF055B03GA	CF055B04GA	CF055B05GA	CF055B06GA	CF055B07GA	CF055B08GA
101-150 (C)	CF055C00GA	CF055C01GA	CF055C02GA	CF055C03GA	CF055C04GA	CF055C05GA	CF055C06GA	CF055C07GA	CF055C08GA
151-200 (D)	CF055D00GA	CF055D01GA	CF055D02GA	CF055D03GA	CF055D04GA	CF055D05GA	CF055D06GA	CF055D07GA	CF055D08GA
201-250 (E)	CF055E00GA	CF055E01GA	CF055E02GA	CF055E03GA	CF055E04GA	CF055E05GA	CF055E06GA	CF055E07GA	CF055E08GA
251-300 (F)	CF055F00GA	CF055F01GA	CF055F02GA	CF055F03GA	CF055F04GA	CF055F05GA	CF055F06GA	CF055F07GA	CF055F08GA
301-350 (G)	CF055G00GA	CF055G01GA	CF055G02GA	CF055G03GA	CF055G04GA	CF055G05GA	CF055G06GA	CF055G07GA	CF055G08GA
351-400 (H)	CF055H00GA	CF055H01GA	CF055H02GA	CF055H03GA	CF055H04GA	CF055H05GA	CF055H06GA	CF055H07GA	CF055H08GA
401-500 (J)	CF055J00GA	CF055J01GA	CF055J02GA	CF055J03GA	CF055J04GA	CF055J05GA	CF055J06GA	CF055J07GA	CF055J08GA
501-600 (L)	CF055L00GA	CF055L01GA	CF055L02GA	CF055L03GA	CF055L04GA	CF055L05GA	CF055L06GA	CF055L07GA	CF055L08GA
601-700 (N)	CF055N00GA	CF055N01GA	CF055N02GA	CF055N03GA	CF055N04GA	CF055N05GA	CF055N06GA	CF055N07GA	CF055N08GA
701-800 (P)	CF055P00GA	CF055P01GA	CF055P02GA	CF055P03GA	CF055P04GA	CF055P05GA	CF055P06GA	CF055P07GA	CF055P08GA
801-900 (R)	CF055R00GA	CF055R01GA	CF055R02GA	CF055R03GA	CF055R04GA	CF055R05GA	CF055R06GA	CF055R07GA	CF055R08GA
901-1000 (T)	CF055T00GA	CF055T01GA	CF055T02GA	CF055T03GA	CF055T04GA	CF055T05GA	CF055T06GA	CF055T07GA	CF055T08GA
1001-1100 (V)	CF055V00GA	CF055V01GA	CF055V02GA	CF055V03GA	CF055V04GA	CF055V05GA	CF055V06GA	CF055V07GA	CF055V08GA
1101-1200 (X)	CF055X00GA	CF055X01GA	CF055X02GA	CF055X03GA	CF055X04GA	CF055X05GA	CF055X06GA	CF055X07GA	CF055X08GA

COLORBOND® STEEL 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	8
001-100 (B)	CF055B00X***	CF055B01X***	CF055B02X***	CF055B03X***	CF055B04X***	CF055B05X***	CF055B06X***	CF055B07X***	CF055B08X***
101-150 (C)	CF055C00X***	CF055C01X***	CF055C02X***	CF055C03X***	CF055C04X***	CF055C05X***	CF055C06X***	CF055C07X***	CF055C08X***
151-200 (D)	CF055D00X***	CF055D01X***	CF055D02X***	CF055D03X***	CF055D04X***	CF055D05X***	CF055D06X***	CF055D07X***	CF055D08X***
201-250 (E)	CF055E00X***	CF055E01X***	CF055E02X***	CF055E03X***	CF055E04X***	CF055E05X***	CF055E06X***	CF055E07X***	CF055E08X***
251-300 (F)	CF055F00X***	CF055F01X***	CF055F02X***	CF055F03X***	CF055F04X***	CF055F05X***	CF055F06X***	CF055F07X***	CF055F08X***
301-350 (G)	CF055G00X***	CF055G01X***	CF055G02X***	CF055G03X***	CF055G04X***	CF055G05X***	CF055G06X***	CF055G07X***	CF055G08X***
351-400 (H)	CF055H00X***	CF055H01X***	CF055H02X***	CF055H03X***	CF055H04X***	CF055H05X***	CF055H06X***	CF055H07X***	CF055H08X***
401-500 (J)	CF055J00X***	CF055J01X***	CF055J02X***	CF055J03X***	CF055J04X***	CF055J05X***	CF055J06X***	CF055J07X***	CF055J08X***
501-600 (L)	CF055L00X***	CF055L01X***	CF055L02X***	CF055L03X***	CF055L04X***	CF055L05X***	CF055L06X***	CF055L07X***	CF055L08X***
601-700 (N)	CF055N00X***	CF055N01X***	CF055N02X***	CF055N03X***	CF055N04X***	CF055N05X***	CF055N06X***	CF055N07X***	CF055N08X***
701-800 (P)	CF055P00X***	CF055P01X***	CF055P02X***	CF055P03X***	CF055P04X***	CF055P05X***	CF055P06X***	CF055P07X***	CF055P08X***
801-900 (R)	CF055R00X***	CF055R01X***	CF055R02X***	CF055R03X***	CF055R04X***	CF055R05X***	CF055R06X***	CF055R07X***	CF055R08X***
901-1000 (T)	CF055T00X***	CF055T01X***	CF055T02X***	CF055T03X***	CF055T04X***	CF055T05X***	CF055T06X***	CF055T07X***	CF055T08X***
1001-1100 (V)	CF055V00X***	CF055V01X***	CF055V02X***	CF055V03X***	CF055V04X***	CF055V05X***	CF055V06X***	CF055V07X***	CF055V08X***
1101-1200 (X)	CF055X00X***	CF055X01X***	CF055X02X***	CF055X03X***	CF055X04X***	CF055X05X***	CF055X06X***	CF055X07X***	CF055X08X***

NOTE: Length Tolerance is - 0 + 15mm. Please advise if flashing length is critical.
StandardBend Tolerance is ± 2.0mm.

CUSTOM FLASHINGS

ZINCALUME® STEEL 0.75 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF075B00ZA	CF075B01ZA	CF075B02ZA	CF075B03ZA	CF075B04ZA	CF075B05ZA	CF075B06ZA
101-150 (C)	CF075C00ZA	CF075C01ZA	CF075C02ZA	CF075C03ZA	CF075C04ZA	CF075C05ZA	CF075C06ZA
151-200 (D)	CF075D00ZA	CF075D01ZA	CF075D02ZA	CF075D03ZA	CF075D04ZA	CF075D05ZA	CF075D06ZA
201-250 (E)	CF075E00ZA	CF075E01ZA	CF075E02ZA	CF075E03ZA	CF075E04ZA	CF075E05ZA	CF075E06ZA
251-300 (F)	CF075F00ZA	CF075F01ZA	CF075F02ZA	CF075F03ZA	CF075F04ZA	CF075F05ZA	CF075F06ZA
301-350 (G)	CF075G00ZA	CF075G01ZA	CF075G02ZA	CF075G03ZA	CF075G04ZA	CF075G05ZA	CF075G06ZA
351-400 (H)	CF075H00ZA	CF075H01ZA	CF075H02ZA	CF075H03ZA	CF075H04ZA	CF075H05ZA	CF075H06ZA
401-500 (J)	CF075J00ZA	CF075J01ZA	CF075J02ZA	CF075J03ZA	CF075J04ZA	CF075J05ZA	CF075J06ZA
501-600 (L)	CF075L00ZA	CF075L01ZA	CF075L02ZA	CF075L03ZA	CF075L04ZA	CF075L05ZA	CF075L06ZA
601-700 (N)	CF075N00ZA	CF075N01ZA	CF075N02ZA	CF075N03ZA	CF075N04ZA	CF075N05ZA	CF075N06ZA
701-750 (P)	CF075P00ZA	CF075P01ZA	CF075P02ZA	CF075P03ZA	CF075P04ZA	CF075P05ZA	CF075P06ZA
751-900 (R)	CF075R00ZA	CF075R01ZA	CF075R02ZA	CF075R03ZA	CF075R04ZA	CF075R05ZA	CF075R06ZA
901-1000 (T)	CF075T00ZA	CF075T01ZA	CF075T02ZA	CF075T03ZA	CF075T04ZA	CF075T05ZA	CF075T06ZA
1001-1100 (V)	CF075V00ZA	CF075V01ZA	CF075V02ZA	CF075V03ZA	CF075V04ZA	CF075V05ZA	CF075V06ZA
1101-1200 (X)	CF075X00ZA	CF075X01ZA	CF075X02ZA	CF075X03ZA	CF075X04ZA	CF075X05ZA	CF075X06ZA

GALVANISED 0.75 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF075B00GA	CF075B01GA	CF075B02GA	CF075B03GA	CF075B04GA	CF075B05GA	CF075B06GA
101-150 (C)	CF075C00GA	CF075C01GA	CF075C02GA	CF075C03GA	CF075C04GA	CF075C05GA	CF075C06GA
151-200 (D)	CF075D00GA	CF075D01GA	CF075D02GA	CF075D03GA	CF075D04GA	CF075D05GA	CF075D06GA
201-250 (E)	CF075E00GA	CF075E01GA	CF075E02GA	CF075E03GA	CF075E04GA	CF075E05GA	CF075E06GA
251-300 (F)	CF075F00GA	CF075F01GA	CF075F02GA	CF075F03GA	CF075F04GA	CF075F05GA	CF075F06GA
301-350 (G)	CF075G00GA	CF075G01GA	CF075G02GA	CF075G03GA	CF075G04GA	CF075G05GA	CF075G06GA
351-400 (H)	CF075H00GA	CF075H01GA	CF075H02GA	CF075H03GA	CF075H04GA	CF075H05GA	CF075H06GA
401-500 (J)	CF075J00GA	CF075J01GA	CF075J02GA	CF075J03GA	CF075J04GA	CF075J05GA	CF075J06GA
501-600 (L)	CF075L00GA	CF075L01GA	CF075L02GA	CF075L03GA	CF075L04GA	CF075L05GA	CF075L06GA
601-700 (N)	CF075N00GA	CF075N01GA	CF075N02GA	CF075N03GA	CF075N04GA	CF075N05GA	CF075N06GA
701-800 (P)	CF075P00GA	CF075P01GA	CF075P02GA	CF075P03GA	CF075P04GA	CF075P05GA	CF075P06GA
801-900 (R)	CF075R00GA	CF075R01GA	CF075R02GA	CF075R03GA	CF075R04GA	CF075R05GA	CF075R06GA
901-1000 (T)	CF075T00GA	CF075T01GA	CF075T02GA	CF075T03GA	CF075T04GA	CF075T05GA	CF075T06GA
1001-1100 (V)	CF075V00GA	CF075V01GA	CF075V02GA	CF075V03GA	CF075V04GA	CF075V05GA	CF075V06GA
1101-1200 (X)	CF075X00GA	CF075X01GA	CF075X02GA	CF075X03GA	CF075X04GA	CF075X05GA	CF075X06GA

NOTE: Length Tolerance is - 0 + 15mm. Please advise if flashing length is critical.
StandardBend Tolerance is ± 2.0mm.



BRISBANE
TEL (07) 3803 9999

MARYBOROUGH
TEL (07) 4123 9500

ROCKHAMPTON
TEL (07) 4921 5600

CUSTOM FLASHINGS

ZINCALUME® STEEL 1.00 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF100B00ZA	CF100B01ZA	CF100B02ZA	CF100B03ZA	CF100B04ZA	CF100B05ZA	CF100B06ZA
101-150 (C)	CF100C00ZA	CF100C01ZA	CF100C02ZA	CF100C03ZA	CF100C04ZA	CF100C05ZA	CF100C06ZA
151-200 (D)	CF100D00ZA	CF100D01ZA	CF100D02ZA	CF100D03ZA	CF100D04ZA	CF100D05ZA	CF100D06ZA
201-250 (E)	CF100E00ZA	CF100E01ZA	CF100E02ZA	CF100E03ZA	CF100E04ZA	CF100E05ZA	CF100E06ZA
251-300 (F)	CF100F00ZA	CF100F01ZA	CF100F02ZA	CF100F03ZA	CF100F04ZA	CF100F05ZA	CF100F06ZA
301-350 (G)	CF100G00ZA	CF100G01ZA	CF100G02ZA	CF100G03ZA	CF100G04ZA	CF100G05ZA	CF100G06ZA
351-400 (H)	CF100H00ZA	CF100H01ZA	CF100H02ZA	CF100H03ZA	CF100H04ZA	CF100H05ZA	CF100H06ZA
401-500 (J)	CF100J00ZA	CF100J01ZA	CF100J02ZA	CF100J03ZA	CF100J04ZA	CF100J05ZA	CF100J06ZA
501-600 (L)	CF100L00ZA	CF100L01ZA	CF100L02ZA	CF100L03ZA	CF100L04ZA	CF100L05ZA	CF100L06ZA
601-700 (N)	CF100N00ZA	CF100N01ZA	CF100N02ZA	CF100N03ZA	CF100N04ZA	CF100N05ZA	CF100N06ZA
701-800 (P)	CF100P00ZA	CF100P01ZA	CF100P02ZA	CF100P03ZA	CF100P04ZA	CF100P05ZA	CF100P06ZA
801-900 (R)	CF100R00ZA	CF100R01ZA	CF100R02ZA	CF100R03ZA	CF100R04ZA	CF100R05ZA	CF100R06ZA
901-1000 (T)	CF100T00ZA	CF100T01ZA	CF100T02ZA	CF100T03ZA	CF100T04ZA	CF100T05ZA	CF100T06ZA
1001-1100 (V)	CF100V00ZA	CF100V01ZA	CF100V02ZA	CF100V03ZA	CF100V04ZA	CF100V05ZA	CF100V06ZA
1101-1200 (X)	CF100X00ZA	CF100X01ZA	CF100X02ZA	CF100X03ZA	CF100X04ZA	CF100X05ZA	CF100X06ZA

GALVANISED 0.95 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF095B00GA	CF095B01GA	CF095B02GA	CF095B03GA	CF095B04GA	CF095B05GA	CF095B06GA
101-150 (C)	CF095C00GA	CF095C01GA	CF095C02GA	CF095C03GA	CF095C04GA	CF095C05GA	CF095C06GA
151-200 (D)	CF095D00GA	CF095D01GA	CF095D02GA	CF095D03GA	CF095D04GA	CF095D05GA	CF095D06GA
201-250 (E)	CF095E00GA	CF095E01GA	CF095E02GA	CF095E03GA	CF095E04GA	CF095E05GA	CF095E06GA
251-300 (F)	CF095F00GA	CF095F01GA	CF095F02GA	CF095F03GA	CF095F04GA	CF095F05GA	CF095F06GA
301-350 (G)	CF095G00GA	CF095G01GA	CF095G02GA	CF095G03GA	CF095G04GA	CF095G05GA	CF095G06GA
351-400 (H)	CF095H00GA	CF095H01GA	CF095H02GA	CF095H03GA	CF095H04GA	CF095H05GA	CF095H06GA
401-500 (J)	CF095J00GA	CF095J01GA	CF095J02GA	CF095J03GA	CF095J04GA	CF095J05GA	CF095J06GA
501-600 (L)	CF095L00GA	CF095L01GA	CF095L02GA	CF095L03GA	CF095L04GA	CF095L05GA	CF095L06GA
601-700 (N)	CF095N00GA	CF095N01GA	CF095N02GA	CF095N03GA	CF095N04GA	CF095N05GA	CF095N06GA
701-800 (P)	CF095P00GA	CF095P01GA	CF095P02GA	CF095P03GA	CF095P04GA	CF095P05GA	CF095P06GA
801-900 (R)	CF095R00GA	CF095R01GA	CF095R02GA	CF095R03GA	CF095R04GA	CF095R05GA	CF095R06GA
901-1000 (T)	CF095T00GA	CF095T01GA	CF095T02GA	CF095T03GA	CF095T04GA	CF095T05GA	CF095T06GA
1001-1100 (V)	CF095V00GA	CF095V01GA	CF095V02GA	CF095V03GA	CF095V04GA	CF095V05GA	CF095V06GA
1101-1200 (X)	CF095X00GA	CF095X01GA	CF095X02GA	CF095X03GA	CF095X04GA	CF095X05GA	CF095X06GA

NOTE: Length Tolerance is - 0 + 15mm. Please advise if flashing length is critical.
StandardBend Tolerance is ± 2.0mm.



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

CUSTOM FLASHINGS

ZINCALUME® STEEL 1.20 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF120B00ZA	CF120B01ZA	CF120B02ZA	CF120B03ZA	CF120B04ZA	CF120B05ZA	CF120B06ZA
101-150 (C)	CF120C00ZA	CF120C01ZA	CF120C02ZA	CF120C03ZA	CF120C04ZA	CF120C05ZA	CF120C06ZA
151-200 (D)	CF120D00ZA	CF120D01ZA	CF120D02ZA	CF120D03ZA	CF120D04ZA	CF120D05ZA	CF120D06ZA
201-250 (E)	CF120E00ZA	CF120E01ZA	CF120E02ZA	CF120E03ZA	CF120E04ZA	CF120E05ZA	CF120E06ZA
251-300 (F)	CF120F00ZA	CF120F01ZA	CF120F02ZA	CF120F03ZA	CF120F04ZA	CF120F05ZA	CF120F06ZA
301-350 (G)	CF120G00ZA	CF120G01ZA	CF120G02ZA	CF120G03ZA	CF120G04ZA	CF120G05ZA	CF120G06ZA
351-400 (H)	CF120H00ZA	CF120H01ZA	CF120H02ZA	CF120H03ZA	CF120H04ZA	CF120H05ZA	CF120H06ZA
401-500 (J)	CF120J00ZA	CF120J01ZA	CF120J02ZA	CF120J03ZA	CF120J04ZA	CF120J05ZA	CF120J06ZA
501-600 (L)	CF120L00ZA	CF120L01ZA	CF120L02ZA	CF120L03ZA	CF120L04ZA	CF120L05ZA	CF120L06ZA
601-700 (N)	CF120N00ZA	CF120N01ZA	CF120N02ZA	CF120N03ZA	CF120N04ZA	CF120N05ZA	CF120N06ZA
701-800 (P)	CF120P00ZA	CF120P01ZA	CF120P02ZA	CF120P03ZA	CF120P04ZA	CF120P05ZA	CF120P06ZA
801-900 (R)	CF120R00ZA	CF120R01ZA	CF120R02ZA	CF120R03ZA	CF120R04ZA	CF120R05ZA	CF120R06ZA
901-1000 (T)	CF120T00ZA	CF120T01ZA	CF120T02ZA	CF120T03ZA	CF120T04ZA	CF120T05ZA	CF120T06ZA
1001-1100 (V)	CF120V00ZA	CF120V01ZA	CF120V02ZA	CF120V03ZA	CF120V04ZA	CF120V05ZA	CF120V06ZA
1101-1200 (X)	CF120X00ZA	CF120X01ZA	CF120X02ZA	CF120X03ZA	CF120X04ZA	CF120X05ZA	CF120X06ZA

GALVANISED 1.15 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF115B00GA	CF115B01GA	CF115B02GA	CF115B03GA	CF115B04GA	CF115B05GA	CF115B06GA
101-150 (C)	CF115C00GA	CF115C01GA	CF115C02GA	CF115C03GA	CF115C04GA	CF115C05GA	CF115C06GA
151-200 (D)	CF115D00GA	CF115D01GA	CF115D02GA	CF115D03GA	CF115D04GA	CF115D05GA	CF115D06GA
201-250 (E)	CF115E00GA	CF115E01GA	CF115E02GA	CF115E03GA	CF115E04GA	CF115E05GA	CF115E06GA
251-300 (F)	CF115F00GA	CF115F01GA	CF115F02GA	CF115F03GA	CF115F04GA	CF115F05GA	CF115F06GA
301-350 (G)	CF115G00GA	CF115G01GA	CF115G02GA	CF115G03GA	CF115G04GA	CF115G05GA	CF115G06GA
351-400 (H)	CF115H00GA	CF115H01GA	CF115H02GA	CF115H03GA	CF115H04GA	CF115H05GA	CF115H06GA
401-500 (J)	CF115J00GA	CF115J01GA	CF115J02GA	CF115J03GA	CF115J04GA	CF115J05GA	CF115J06GA
501-600 (L)	CF115L00GA	CF115L01GA	CF115L02GA	CF115L03GA	CF115L04GA	CF115L05GA	CF115L06GA
601-700 (N)	CF115N00GA	CF115N01GA	CF115N02GA	CF115N03GA	CF115N04GA	CF115N05GA	CF115N06GA
701-800 (P)	CF115P00GA	CF115P01GA	CF115P02GA	CF115P03GA	CF115P04GA	CF115P05GA	CF115P06GA
801-900 (R)	CF115R00GA	CF115R01GA	CF115R02GA	CF115R03GA	CF115R04GA	CF115R05GA	CF115R06GA
901-1000 (T)	CF115T00GA	CF115T01GA	CF115T02GA	CF115T03GA	CF115T04GA	CF115T05GA	CF115T06GA
1001-1100 (V)	CF115V00GA	CF115V01GA	CF115V02GA	CF115V03GA	CF115V04GA	CF115V05GA	CF115V06GA
1101-1200 (X)	CF115X00GA	CF115X01GA	CF115X02GA	CF115X03GA	CF115X04GA	CF115X05GA	CF115X06GA

GALVANISED 1.55 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF155B00GA	CF155B01GA	CF155B02GA	CF155B03GA	CF155B04GA	CF155B05GA	CF155B06GA
101-150 (C)	CF155C00GA	CF155C01GA	CF155C02GA	CF155C03GA	CF155C04GA	CF155C05GA	CF155C06GA
151-200 (D)	CF155D00GA	CF155D01GA	CF155D02GA	CF155D03GA	CF155D04GA	CF155D05GA	CF155D06GA
201-250 (E)	CF155E00GA	CF155E01GA	CF155E02GA	CF155E03GA	CF155E04GA	CF155E05GA	CF155E06GA
251-300 (F)	CF155F00GA	CF155F01GA	CF155F02GA	CF155F03GA	CF155F04GA	CF155F05GA	CF155F06GA
301-350 (G)	CF155G00GA	CF155G01GA	CF155G02GA	CF155G03GA	CF155G04GA	CF155G05GA	CF155G06GA
351-400 (H)	CF155H00GA	CF155H01GA	CF155H02GA	CF155H03GA	CF155H04GA	CF155H05GA	CF155H06GA
401-500 (J)	CF155J00GA	CF155J01GA	CF155J02GA	CF155J03GA	CF155J04GA	CF155J05GA	CF155J06GA
501-600 (L)	CF155L00GA	CF155L01GA	CF155L02GA	CF155L03GA	CF155L04GA	CF155L05GA	CF155L06GA
601-700 (N)	CF155N00GA	CF155N01GA	CF155N02GA	CF155N03GA	CF155N04GA	CF155N05GA	CF155N06GA
701-800 (P)	CF155P00GA	CF155P01GA	CF155P02GA	CF155P03GA	CF155P04GA	CF155P05GA	CF155P06GA
801-900 (R)	CF155R00GA	CF155R01GA	CF155R02GA	CF155R03GA	CF155R04GA	CF155R05GA	CF155R06GA
901-1000 (T)	CF155T00GA	CF155T01GA	CF155T02GA	CF155T03GA	CF155T04GA	CF155T05GA	CF155T06GA
1001-1100 (V)	CF155V00GA	CF155V01GA	CF155V02GA	CF155V03GA	CF155V04GA	CF155V05GA	CF155V06GA
1101-1200 (X)	CF155X00GA	CF155X01GA	CF155X02GA	CF155X03GA	CF155X04GA	CF155X05GA	CF155X06GA

NOTE: Length Tolerance is - 0 + 15mm. Please advise if flashing length is critical.
StandardBend Tolerance is ± 2.0mm.

48

Product/Roofing/Cladding	BMT	COLORBOND® ULTRA STEEL						COLORBOND® METALLIC STEEL						COLORBOND® STEEL MATT		
		DUN	MON	SUR	WDG	WLB	WSP	ARI	AST	CEL	COS	GLT	RHE	BAS	MON	SUR
Stramit Monoclad®	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
	0.48	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Stramit® Corrugated	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
	0.48	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Stramit® Speed Deck	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
	0.48	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Stramit Longspan®	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
	0.48	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Stramit Minirib®	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit K-Panel®	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit Mini Corry®	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit Mini Corry®	0.48	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Stramit® C-Clad 280	0.55	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Premier 300	0.55	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Fascia	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit® Valley Folded	0.55	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit® Roll Barge Cap	0.55	✓	✓	✓	✓	✓	✓									
Stramit Roll Top Ridge	0.55	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® QLD Slotted Quad	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit® Quad 150	0.42	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit® Quad 175	0.55	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit® Compact Gutter	0.42	✓	✓	✓	✓	✓	✓									
Stramit® Downpipe 100 X 75	0.55	✓	✓	✓	✓	✓	✓							✓	✓	✓
Stramit® Downpipe 85 / 100	0.55	✓	✓	✓	✓	✓	✓									

 = Product Available.

NOTE: All Ultra and Metallic products are 48hr lead time. Subject to coil availability.

FASTENER SELECTION GUIDE

CLASS 3

For general **external** use in mild and moderate industrial and mild marine applications, suitable for use with COLORBOND® steel.

In moderate marine applications (400m - 1,000m from breaking surf) the screw manufacturer strongly recommends Climaseal 4 coating. (Class 4)

CLASS 4

Climate seal 5 for **external** use in moderate and severe marine environments up to typically 400 meters from the shore, suitable for use with COLORBOND® Ultra Steel.

STAINLESS STEEL FASTENERS

Severe marine and polluted industrial environments where COLORBOND® stainless and unpainted Stainless Steel, copper or Aluminium are specified
- Stainless Steel fasteners are recommended.

COLORBOND® STEEL COLOUR AVAILABILITY							
COLORBOND® ULTRA STEEL		COLORBOND® STAINLESS STEEL		COLORBOND® METALLIC STEEL		COLORBOND® STEEL MATT	
DUN	DUNE®	DOC	DEEP OCEAN®	ARI	ARIES®	BAS	BASALT® Matt
MON	MONUMENT®	DUN	DUNE®	AST	ASTRO®	MON	MONUMENT® Matt
SUR	SURFMIST®	SUR	SURFMIST®	CEL	CELESTIAN®	SUR	SURFMIST® Matt
WDG	WOODLAND GREY®	WSP	WINDSPRAY®	COS	COSMIC®		
WLB	WALLABY®			GLT	GALACTIC®		
WSP	WINDSPRAY®			RHE	RHEA®		

*Surfmist® only stock in COLORBOND® Stainless steel

Colorbond®

COLORBOND® steel is more than a world-class building product. It’s an iconic brand that’s helped the people of our building industry shape the very landscape in which we live.

MADE FOR AUSTRALIAN CONDITIONS

Australia is battered by our relentless climate every day. Today’s COLORBOND® steel is the result of over 5 decades of research, development and innovation, based on over 50 years of data from thousands of steel samples.

TRIED AND TESTED FOR THE AUSTRALIAN ENVIRONMENT

For roofing and walling close to water, COLORBOND® Ultra steel has been designed to provide enhanced corrosion protection, while the iconic COLORBOND® steel range of 22 colours is ideal for most building designs in most locations. Regardless of where you build, there’s likely to be a COLORBOND® steel solution for you.

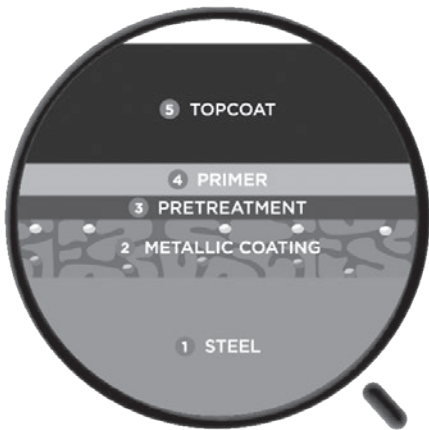
COOLER IN THE SUMMER HEAT

COLORBOND® steel colours incorporate Thermatech® solar reflectance technology¹, which can mean reduced reliance on air-conditioning and less heat stress on a roof. For commercial roofing applications, COLORBOND® Coolmax® steel provides BlueScope’s highest solar reflectance product, which may help to reduce roofing temperatures and keep buildings cooler².

FIVE LAYERS OF PROTECTION

Manufactured in Australia to relevant Australian Standards (AS 1397-2011 and AS/NZS 2728:2013) and tested in some of the harshest Australian conditions, COLORBOND® steel is far more than just ‘paint on steel’.

1. The steel base meets relevant Australian Standards, ensuring strict adherence to the required grade and strength.
2. The base is then coated in BlueScope’s industry leading metallic coating incorporating Activate® technology⁴, to provide enhanced corrosion resistance.
3. A thin pre-treatment layer is applied to optimise the adhesion of further coatings.
4. A corrosion inhibitive primer is baked onto the surface.
5. A topcoat of specially developed, exterior grade paint is baked on to provide resistance to chipping, flaking and blistering and to ensure the finish retains its look for longer.



PEACE OF MIND FOR YOU AND YOUR CUSTOMERS

COLORBOND® steel for roofing is warranted for corrosion to perforation for up to 36 years, as well as paint flake and peel for up to 20 years³. Detailed information can be accessed at bluescopesteel.com.au/warranties.

NATIONWIDE SUPPORT

BlueScope’s nationwide network of sales and technical support helps provide advice and information for customers, architects, designers, engineers, builders, trades and homeowners who use COLORBOND® steel.




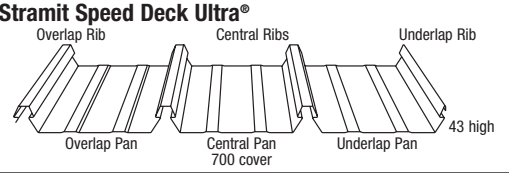








1. Thermatech® technology is not available in Night Sky®, or non-standard colours, and is not available in COLORBOND® Stainless steel, COLORBOND® Metallic steel, or COLORBOND® Coolmax® steel. Results will depend on roof colour, level and location of insulation, type and location of building shape and function.













2. Compared to conventional roofing materials of lower solar reflectance index (SRI), such as ZINCALUME® steel and all other roofing materials in the COLORBOND® steel range. Any savings and or the extent to which a building is cooler may vary and depend upon the particular circumstances of your building, including building location, level of insulation, location of air-conditioning when installed, building shape, building function and environmental factors. For further information refer to Stockland case study <http://steel.com.au/colorbond-coolmax-steel>.

3. Warranties are subject to exclusions, application and eligibility criteria. For full terms and conditions and to determine the eligibility of your product for the warranty visit bluescopesteel.com.au/warranties or contact BlueScope on 1800 064 384.

4. Aluminium/zinc/magnesium alloy-coated steel substrate incorporating Activate® technology is not available for COLORBOND® Stainless steel, and COLORBOND® steel products with a galvanised steel substrate.

COLORBOND® STEEL PREMIUM PRODUCTS • ROOFING • CLADDING

Product Roofing/Cladding/Accessories	Product Details	BMT mm	Cover Width mm	Finish	Code	Unit
Stramit® Corrugated	 762 cover 16 high	0.42		Coolmax®	C42KWHN	per m ²
		0.42		Ultra	C42U***	per m ²
		0.42		Stainless	C42SSUR	per m ²
		0.42		Matt	C42T***	per m ²
		0.48		Coolmax®	C48KWHN	per m ²
		0.48		Ultra	C48U***	per m ²
Stramit Monoclad®	 130 pan 762 cover 60 rib 29 high	0.42		Coolmax®	MC42KWHN	per m ²
		0.42		Ultra	MC42U***	per m ²
		0.42		Stainless	MC42SSUR	per m ²
		0.42		Matt	MC42T***	per m ²
		0.48		Coolmax®	MC48KWHN	per m ²
		0.48		Ultra	MC48U***	per m ²
Longspan®	 40 pan 700 cover 60 rib 27 high	0.42		Coolmax®	LS42KWHN	per m ²
		0.42		Ultra	LS42U***	per m ²
		0.42		Stainless	LS42SSUR	per m ²
		0.42		Matt	LS42T***	per m ²
		0.48		Coolmax®	LS48KWHN	per m ²
		0.48		Ultra	LS48U***	per m ²
Stramit Speed Deck Ultra®	 Overlap Rib Central Ribs Underlap Rib Overlap Pan Central Pan 700 cover Underlap Pan 43 high Fixing Clips POA	0.42		Coolmax®	UD42KWHN	per m ²
		0.42		Ultra	UD42U***	per m ²
		0.42		Matt	UD42T***	per m ²
		0.48		Coolmax®	UD48KWHN	per m ²
		0.48		Ultra	UD48U***	per m ²
		0.48		Metallic	UD48M***	per m ²
Stramit Mini Corry®	 825 cover 6 high	0.42		Matt	MK42T***	per m ²
		0.42		Ultra	MK42U***	per m ²
		0.48		Ultra	MK48U***	per m ²
		0.48		Metallic	MK48M***	per m ²
Stramit C-Clad 280		0.55		Matt	CC28055T***	per m ²
		0.55		Ultra	CC28055U***	per m ²
		0.55		Metallic	CC28055M***	per m ²
Stramit Premier 300	 14	0.55		Matt	CC30055T***	
		0.55		Ultra	CC30055U***	per m ²
		0.55		Metallic	CC30055M***	per m ²
Stramit CapacityPLUS™ 660		0.42		Ultra	CP42U***	per m ²
		0.42		Coolmax®	CP42KWHN	per m ²
		0.42		Matt	CP42T***	per m ²
		0.48		Coolmax®	CP48KWHN	per m ²
		0.48		Ultra	CP48U***	per m ²
		0.48		Metallic	CP48M***	per m ²
Stramit Sharpline® Direct Fix		0.55	290	Matt	SLS290D55T***	per m ²
		0.55	290	Ultra	SLS290D55U***	per m ²
		0.55	490	Matt	SLS490D55T***	per m ²
		0.55	490	Ultra	SLS490D55U***	per m ²
Stramit Sharpline® Clip Fix		0.55	265	Matt	SLT265D55T***	per m ²
		0.55	265	Ultra	SLT265D55U***	per m ²
		0.55	465	Matt	SLT465D55T***	per m ²
		0.55	465	Ultra	SLT465D55U***	per m ²
Stramit Sharpline® Clip Fix		0.55	320	Matt	SLS320C55T***	per m ²
		0.55	320	Ultra	SLS320C55U***	per m ²
		0.55	520	Matt	SLS520C55T***	per m ²
		0.55	520	Ultra	SLS520C55U***	per m ²
Stramit Sharpline® Clip Fix		0.55	285	Matt	SLT285C55T***	per m ²
		0.55	285	Ultra	SLT285C55U***	per m ²
		0.55	465	Matt	LT465C55T***	per m ²
		0.55	465	Ultra	LT465C55U***	per m ²

COLORBOND® STEEL PREMIUM PRODUCTS • FASCIA • GUTTERS • ACCESSORIES				
Product	Product Details	Code	Finish	Unit
FASCIA Stramit® Fascia		FBU*** FBT***	Ultra Matt	lin metre lin metre
Accessories	 External Corner	FBECU*** FBECT*** FBICT***	Ultra Matt Matt	each each each
GUTTERS Stramit Queensland Quad®		QQSU*** QQST***	Ultra Matt	lin metre lin metre
Accessories	 Concealed Bracket	QQSCBSS	Stainless Steel	each
Stramit® Quad 150		QQ150U*** QQ150T***	Ultra Matt	lin metre lin metre
Accessories	 Concealed Bracket	QQ150CBSS	Stainless Steel	each
Stramit Quad 175®		QQ175U*** QQ175M*** QQ175T*** QQ175S***	Ultra Metallic Matt Stainless	lin metre lin metre lin metre lin metre
Stramit Compact Gutter®		CGSU***	Ultra	lin metre
Accessories	 Concealed Bracket	CGCBSS	Stainless Steel	each
Stramit Half Round 150 Gutter®		HRGR150PU*** HRGR150PSSUR HRGR150PT*** HRGR150SU*** HRGR150SSSUR HRGR150ST***	Ultra Stainless Matt Ultra Stainless Matt	lin metre lin metre lin metre lin metre lin metre lin metre
Stramit Flatback Half Round Gutter®		HRGFB150PU*** HRGFB150PSSUR HRGFB150PT*** HRGFB150SU*** HRGFB150SSSUR HRGFB150ST***	Ultra Stainless Matt Ultra Stainless Matt	lin metre lin metre lin metre lin metre lin metre lin metre
Stramit Compact Gutter® Barge		CGBU***	Ultra	lin metre

*Note - When using stainless steel brackets with ultra products Isolation is required.

</



BRISBANE
TEL (07) 3803 9999

MARYBOROUGH
TEL (07) 4123 9500

ROCKHAMPTON
TEL (07) 4921 5600

CUSTOM FLASHINGS COLORBOND® ULTRA STEEL, COLORBOND® METALLIC STEEL, COLORBOND® STAINLESS STEEL

COLORBOND® ULTRA STEEL 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	8
001-100 (B)	CF055B00U***	CF055B01U***	CF055B02U***	CF055B03U***	CF055B04U***	CF055B05U***	CF055B06U***	CF055B07U***	CF055B08U***
101-150 (C)	CF055C00U***	CF055C01U***	CF055C02U***	CF055C03U***	CF055C04U***	CF055C05U***	CF055C06U***	CF055C07U***	CF055C08U***
151-200 (D)	CF055D00U***	CF055D01U***	CF055D02U***	CF055D03U***	CF055D04U***	CF055D05U***	CF055D06U***	CF055D07U***	CF055D08U***
201-250 (E)	CF055E00U***	CF055E01U***	CF055E02U***	CF055E03U***	CF055E04U***	CF055E05U***	CF055E06U***	CF055E07U***	CF055E08U***
251-300 (F)	CF055F00U***	CF055F01U***	CF055F02U***	CF055F03U***	CF055F04U***	CF055F05U***	CF055F06U***	CF055F07U***	CF055F08U***
301-350 (G)	CF055G00U***	CF055G01U***	CF055G02U***	CF055G03U***	CF055G04U***	CF055G05U***	CF055G06U***	CF055G07U***	CF055G08U***
351-400 (H)	CF055H00U***	CF055H01U***	CF055H02U***	CF055H03U***	CF055H04U***	CF055H05U***	CF055H06U***	CF055H07U***	CF055H08U***
401-500 (J)	CF055J00U***	CF055J01U***	CF055J02U***	CF055J03U***	CF055J04U***	CF055J05U***	CF055J06U***	CF055J07U***	CF055J08U***
501-600 (L)	CF055L00U***	CF055L01U***	CF055L02U***	CF055L03U***	CF055L04U***	CF055L05U***	CF055L06U***	CF055L07U***	CF055L08U***
601-700 (N)	CF055N00U***	CF055N01U***	CF055N02U***	CF055N03U***	CF055N04U***	CF055N05U***	CF055N06U***	CF055N07U***	CF055N08U***
701-800 (P)	CF055P00U***	CF055P01U***	CF055P02U***	CF055P03U***	CF055P04U***	CF055P05U***	CF055P06U***	CF055P07U***	CF055P08U***
801-900 (R)	CF055R00U***	CF055R01U***	CF055R02U***	CF055R03U***	CF055R04U***	CF055R05U***	CF055R06U***	CF055R07U***	CF055R08U***
901-1000 (T)	CF055T00U***	CF055T01U***	CF055T02U***	CF055T03U***	CF055T04U***	CF055T05U***	CF055T06U***	CF055T07U***	CF055T08U***
1001-1100 (V)	CF055V00U***	CF055V01U***	CF055V02U***	CF055V03U***	CF055V04U***	CF055V05U***	CF055V06U***	CF055V07U***	CF055V08U***
1101-1200 (X)	CF055X00U***	CF055X01U***	CF055X02U***	CF055X03U***	CF055X04U***	CF055X05U***	CF055X06U***	CF055X07U***	CF055X08U***

COLORBOND® METALLIC STEEL 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	8
001-100 (B)	CF055B00M***	CF055B01M***	CF055B02M***	CF055B03M***	CF055B04M***	CF055B05M***	CF055B06M***	CF055B07M***	CF055B08M***
101-150 (C)	CF055C00M***	CF055C01M***	CF055C02M***	CF055C03M***	CF055C04M***	CF055C05M***	CF055C06M***	CF055C07M***	CF055C08M***
151-200 (D)	CF055D00M***	CF055D01M***	CF055D02M***	CF055D03M***	CF055D04M***	CF055D05M***	CF055D06M***	CF055D07M***	CF055D08M***
201-250 (E)	CF055E00M***	CF055E01M***	CF055E02M***	CF055E03M***	CF055E04M***	CF055E05M***	CF055E06M***	CF055E07M***	CF055E08M***
251-300 (F)	CF055F00M***	CF055F01M***	CF055F02M***	CF055F03M***	CF055F04M***	CF055F05M***	CF055F06M***	CF055F07M***	CF055F08M***
301-350 (G)	CF055G00M***	CF055G01M***	CF055G02M***	CF055G03M***	CF055G04M***	CF055G05M***	CF055G06M***	CF055G07M***	CF055G08M***
351-400 (H)	CF055H00M***	CF055H01M***	CF055H02M***	CF055H03M***	CF055H04M***	CF055H05M***	CF055H06M***	CF055H07M***	CF055H08M***
401-500 (J)	CF055J00M***	CF055J01M***	CF055J02M***	CF055J03M***	CF055J04M***	CF055J05M***	CF055J06M***	CF055J07M***	CF055J08M***
501-600 (L)	CF055L00M***	CF055L01M***	CF055L02M***	CF055L03M***	CF055L04M***	CF055L05M***	CF055L06M***	CF055L07M***	CF055L08M***
601-700 (N)	CF055N00M***	CF055N01M***	CF055N02M***	CF055N03M***	CF055N04M***	CF055N05M***	CF055N06M***	CF055N07M***	CF055N08M***
701-800 (P)	CF055P00M***	CF055P01M***	CF055P02M***	CF055P03M***	CF055P04M***	CF055P05M***	CF055P06M***	CF055P07M***	CF055P08M***
801-900 (R)	CF055R00M***	CF055R01M***	CF055R02M***	CF055R03M***	CF055R04M***	CF055R05M***	CF055R06M***	CF055R07M***	CF055R08M***
901-1000 (T)	CF055T00M***	CF055T01M***	CF055T02M***	CF055T03M***	CF055T04M***	CF055T05M***	CF055T06M***	CF055T07M***	CF055T08M***
1001-1100 (V)	CF055V00M***	CF055V01M***	CF055V02M***	CF055V03M***	CF055V04M***	CF055V05M***	CF055V06M***	CF055V07M***	CF055V08M***
1101-1200 (X)	CF055X00M***	CF055X01M***	CF055X02M***	CF055X03M***	CF055X04M***	CF055X05M***	CF055X06M***	CF055X07M***	CF055X08M***

COLORBOND® STAINLESS STEEL IN SURFMIST® 0.55 BMT

Girth Width	No of Bends								
(mm)	0	1	2	3	4	5	6	7	8
001-100 (B)	CF055B00SSUR	CF055B01SSUR	CF055B02SSUR	CF055B03SSUR	CF055B04SSUR	CF055B05SSUR	CF055B06SSUR	CF055B07SSUR	CF055B08SSUR
101-150 (C)	CF055C00SSUR	CF055C01SSUR	CF055C02SSUR	CF055C03SSUR	CF055C04SSUR	CF055C05SSUR	CF055C06SSUR	CF055C07SSUR	CF055C08SSUR
151-200 (D)	CF055D00SSUR	CF055D01SSUR	CF055D02SSUR	CF055D03SSUR	CF055D04SSUR	CF055D05SSUR	CF055D06SSUR	CF055D07SSUR	CF055D08SSUR
201-250 (E)	CF055E00SSUR	CF055E01SSUR	CF055E02SSUR	CF055E03SSUR	CF055E04SSUR	CF055E05SSUR	CF055E06SSUR	CF055E07SSUR	CF055E08SSUR
251-300 (F)	CF055F00SSUR	CF055F01SSUR	CF055F02SSUR	CF055F03SSUR	CF055F04SSUR	CF055F05SSUR	CF055F06SSUR	CF055F07SSUR	CF055F08SSUR
301-350 (G)	CF055G00SSUR	CF055G01SSUR	CF055G02SSUR	CF055G03SSUR	CF055G04SSUR	CF055G05SSUR	CF055G06SSUR	CF055G07SSUR	CF055G08SSUR
351-400 (H)	CF055H00SSUR	CF055H01SSUR	CF055H02SSUR	CF055H03SSUR	CF055H04SSUR	CF055H05SSUR	CF055H06SSUR	CF055H07SSUR	CF055H08SSUR
401-500 (J)	CF055J00SSUR	CF055J01SSUR	CF055J02SSUR	CF055J03SSUR	CF055J04SSUR	CF055J05SSUR	CF055J06SSUR	CF055J07SSUR	CF055J08SSUR
501-600 (L)	CF055L00SSUR	CF055L01SSUR	CF055L02SSUR	CF055L03SSUR	CF055L04SSUR	CF055L05SSUR	CF055L06SSUR	CF055L07SSUR	CF055L08SSUR
601-700 (N)	CF055N00SSUR	CF055N01SSUR	CF055N02SSUR	CF055N03SSUR	CF055N04SSUR	CF055N05SSUR	CF055N06SSUR	CF055N07SSUR	CF055N08SSUR
701-800 (P)	CF055P00SSUR	CF055P01SSUR	CF055P02SSUR	CF055P03SSUR	CF055P04SSUR	CF055P05SSUR	CF055P06SSUR	CF055P07SSUR	CF055P08SSUR
801-900 (R)	CF055R00SSUR	CF055R01SSUR	CF055R02SSUR	CF055R03SSUR	CF055R04SSUR	CF055R05SSUR	CF055R06SSUR	CF055R07SSUR	CF055R08SSUR
901-1000 (T)	CF055T00SSUR	CF055T01SSUR	CF055T02SSUR	CF055T03SSUR	CF055T04SSUR	CF055T05SSUR	CF055T06SSUR	CF055T07SSUR	CF055T08SSUR
1001-1100 (V)	CF055V00SSUR	CF055V01SSUR	CF055V02SSUR	CF055V03SSUR	CF055V04SSUR	CF055V05SSUR	CF055V06SSUR	CF055V07SSUR	CF055V08SSUR
1101-1200 (X)	CF055X00SSUR	CF055X01SSUR	CF055X02SSUR	CF055X03SSUR	CF055X04SSUR	CF055X05SSUR	CF055X06SSUR	CF055X07SSUR	CF055X08SSUR

NOTE: Length Tolerance is - 0 + 15mm. Please advise if flashing length is critical.
StandardBend Tolerance is ± 2.0mm.



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

CUSTOM FLASHINGS STAINLESS STEEL & COLORBOND® STEEL MATT

304 STAINLESS 2B 0.55 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF055B00SS02	CF055B01SS02	CF055B02SS02	CF055B03SS02	CF055B04SS02	CF055B05SS02	CF055B06SS02
101-150 (C)	CF055C00SS02	CF055C01SS02	CF055C02SS02	CF055C03SS02	CF055C04SS02	CF055C05SS02	CF055C06SS02
151-200 (D)	CF055D00SS02	CF055D01SS02	CF055D02SS02	CF055D03SS02	CF055D04SS02	CF055D05SS02	CF055D06SS02
201-250 (E)	CF055E00SS02	CF055E01SS02	CF055E02SS02	CF055E03SS02	CF055E04SS02	CF055E05SS02	CF055E06SS02
251-300 (F)	CF055F00SS02	CF055F01SS02	CF055F02SS02	CF055F03SS02	CF055F04SS02	CF055F05SS02	CF055F06SS02
301-350 (G)	CF055G00SS02	CF055G01SS02	CF055G02SS02	CF055G03SS02	CF055G04SS02	CF055G05SS02	CF055G06SS02
351-400 (H)	CF055H00SS02	CF055H01SS02	CF055H02SS02	CF055H03SS02	CF055H04SS02	CF055H05SS02	CF055H06SS02
401-500 (J)	CF055J00SS02	CF055J01SS02	CF055J02SS02	CF055J03SS02	CF055J04SS02	CF055J05SS02	CF055J06SS02
501-600 (L)	CF055L00SS02	CF055L01SS02	CF055L02SS02	CF055L03SS02	CF055L04SS02	CF055L05SS02	CF055L06SS02
601-700 (N)	CF055N00SS02	CF055N01SS02	CF055N02SS02	CF055N03SS02	CF055N04SS02	CF055N05SS02	CF055N06SS02
701-800 (P)	CF055P00SS02	CF055P01SS02	CF055P02SS02	CF055P03SS02	CF055P04SS02	CF055P05SS02	CF055P06SS02
801-900 (R)	CF055R00SS02	CF055R01SS02	CF055R02SS02	CF055R03SS02	CF055R04SS02	CF055R05SS02	CF055R06SS02
901-1000 (T)	CF055T00SS02	CF055T01SS02	CF055T02SS02	CF055T03SS02	CF055T04SS02	CF055T05SS02	CF055T06SS02
1001-1100 (V)	CF055V00SS02	CF055V01SS02	CF055V02SS02	CF055V03SS02	CF055V04SS02	CF055V05SS02	CF055V06SS02
1101-1200 (X)	CF055X00SS02	CF055X01SS02	CF055X02SS02	CF055X03SS02	CF055X04SS02	CF055X05SS02	CF055X06SS02

316 STAINLESS N4 0.55 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF055B00SS14	CF055B01SS14	CF055B02SS14	CF055B03SS14	CF055B04SS14	CF055B05SS14	CF055B06SS14
101-150 (C)	CF055C00SS14	CF055C01SS14	CF055C02SS14	CF055C03SS14	CF055C04SS14	CF055C05SS14	CF055C06SS14
151-200 (D)	CF055D00SS14	CF055D01SS14	CF055D02SS14	CF055D03SS14	CF055D04SS14	CF055D05SS14	CF055D06SS14
201-250 (E)	CF055E00SS14	CF055E01SS14	CF055E02SS14	CF055E03SS14	CF055E04SS14	CF055E05SS14	CF055E06SS14
251-300 (F)	CF055F00SS14	CF055F01SS14	CF055F02SS14	CF055F03SS14	CF055F04SS14	CF055F05SS14	CF055F06SS14
301-350 (G)	CF055G00SS14	CF055G01SS14	CF055G02SS14	CF055G03SS14	CF055G04SS14	CF055G05SS14	CF055G06SS14
351-400 (H)	CF055H00SS14	CF055H01SS14	CF055H02SS14	CF055H03SS14	CF055H04SS14	CF055H05SS14	CF055H06SS14
401-500 (J)	CF055J00SS14	CF055J01SS14	CF055J02SS14	CF055J03SS14	CF055J04SS14	CF055J05SS14	CF055J06SS14
501-600 (L)	CF055L00SS14	CF055L01SS14	CF055L02SS14	CF055L03SS14	CF055L04SS14	CF055L05SS14	CF055L06SS14
601-700 (N)	CF055N00SS14	CF055N01SS14	CF055N02SS14	CF055N03SS14	CF055N04SS14	CF055N05SS14	CF055N06SS14
701-800 (P)	CF055P00SS14	CF055P01SS14	CF055P02SS14	CF055P03SS14	CF055P04SS14	CF055P05SS14	CF055P06SS14
801-900 (R)	CF055R00SS14	CF055R01SS14	CF055R02SS14	CF055R03SS14	CF055R04SS14	CF055R05SS14	CF055R06SS14
901-1000 (T)	CF055T00SS14	CF055T01SS14	CF055T02SS14	CF055T03SS14	CF055T04SS14	CF055T05SS14	CF055T06SS14
1001-1100 (V)	CF055V00SS14	CF055V01SS14	CF055V02SS14	CF055V03SS14	CF055V04SS14	CF055V05SS14	CF055V06SS14
1101-1200 (X)	CF055X00SS14	CF055X01SS14	CF055X02SS14	CF055X03SS14	CF055X04SS14	CF055X05SS14	CF055X06SS14

COLORBOND® STEEL MATT 0.55 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF055B00T---	CF055B01T---	CF055B02T---	CF055B03T---	CF055B04T---	CF055B05T---	CF055B06T---
101-150 (C)	CF055C00T---	CF055C01T---	CF055C02T---	CF055C03T---	CF055C04T---	CF055C05T---	CF055C06T---
151-200 (D)	CF055D00T---	CF055D01T---	CF055D02T---	CF055D03T---	CF055D04T---	CF055D05T---	CF

CUSTOM FLASHINGS STAINLESS STEEL

316 STAINLESS 2B 0.55

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF055B00SS12	CF055B01SS12	CF055B12SS12	CF055B03SS12	CF055B04SS12	CF055B05SS12	CF055B06SS12
101-150 (C)	CF055C00SS12	CF055C01SS12	CF055C12SS12	CF055C03SS12	CF055C04SS12	CF055C05SS12	CF055C06SS12
151-200 (D)	CF055D00SS12	CF055D01SS12	CF055D12SS12	CF055D03SS12	CF055D04SS12	CF055D05SS12	CF055D06SS12
201-250 (E)	CF055E00SS12	CF055E01SS12	CF055E12SS12	CF055E03SS12	CF055E04SS12	CF055E05SS12	CF055E06SS12
251-300 (F)	CF055F00SS12	CF055F01SS12	CF055F12SS12	CF055F03SS12	CF055F04SS12	CF055F05SS12	CF055F06SS12
301-350 (G)	CF055G00SS12	CF055G01SS12	CF055G12SS12	CF055G03SS12	CF055G04SS12	CF055G05SS12	CF055G06SS12
351-400 (H)	CF055H00SS12	CF055H01SS12	CF055H12SS12	CF055H03SS12	CF055H04SS12	CF055H05SS12	CF055H06SS12
401-500 (J)	CF055J00SS12	CF055J01SS12	CF055J12SS12	CF055J03SS12	CF055J04SS12	CF055J05SS12	CF055J06SS12
501-600 (L)	CF055L00SS12	CF055L01SS12	CF055L12SS12	CF055L03SS12	CF055L04SS12	CF055L05SS12	CF055L06SS12
601-700 (N)	CF055N00SS12	CF055N01SS12	CF055N12SS12	CF055N03SS12	CF055N04SS12	CF055N05SS12	CF055N06SS12
701-800 (P)	CF055P00SS12	CF055P01SS12	CF055P12SS12	CF055P03SS12	CF055P04SS12	CF055P05SS12	CF055P06SS12
801-900 (R)	CF055R00SS12	CF055R01SS12	CF055R12SS12	CF055R03SS12	CF055R04SS12	CF055R05SS12	CF055R06SS12
901-1000 (T)	CF055T00SS12	CF055T01SS12	CF055T12SS12	CF055T03SS12	CF055T04SS12	CF055T05SS12	CF055T06SS12
1001-1100 (V)	CF055V00SS12	CF055V01SS12	CF055V12SS12	CF055V03SS12	CF055V04SS12	CF055V05SS12	CF055V06SS12
1101-1200 (X)	CF055X00SS12	CF055X01SS12	CF055X12SS12	CF055X03SS12	CF055X04SS12	CF055X05SS12	CF055X06SS12

304 STAINLESS 2B 0.090 BMT

Girth Width	No of Bends						
(mm)	0	1	2	3	4	5	6
001-100 (B)	CF090B00SS01	CF090B01SS01	CF090B02SS01	CF090B03SS01	CF090B04SS01	CF090B05SS01	CF090B06SS01
101-150 (C)	CF090C00SS01	CF090C01SS01	CF090C02SS01	CF090C03SS01	CF090C04SS01	CF090C05SS01	CF090C06SS01
151-200 (D)	CF090D00SS01	CF090D01SS01	CF090D02SS01	CF090D03SS01	CF090D04SS01	CF090D05SS01	CF090D06SS01
201-250 (E)	CF090E00SS01	CF090E01SS01	CF090E02SS01	CF090E03SS01	CF090E04SS01	CF090E05SS01	CF090E06SS01
251-300 (F)	CF090F00SS01	CF090F01SS01	CF090F02SS01	CF090F03SS01	CF090F04SS01	CF090F05SS01	CF090F06SS01
301-350 (G)	CF090G00SS01	CF090G01SS01	CF090G02SS01	CF090G03SS01	CF090G04SS01	CF090G05SS01	CF090G06SS01
351-400 (H)	CF090H00SS01	CF090H01SS01	CF090H02SS01	CF090H03SS01	CF090H04SS01	CF090H05SS01	CF090H06SS01
401-500 (J)	CF090J00SS01	CF090J01SS01	CF090J02SS01	CF090J03SS01	CF090J04SS01	CF090J05SS01	CF090J06SS01
501-600 (L)	CF090L00SS01	CF090L01SS01	CF090L02SS01	CF090L03SS01	CF090L04SS01	CF090L05SS01	CF090L06SS01
601-700 (N)	CF090N00SS01	CF090N01SS01	CF090N02SS01	CF090N03SS01	CF090N04SS01	CF090N05SS01	CF090N06SS01
701-800 (P)	CF090P00SS01	CF090P01SS01	CF090P02SS01	CF090P03SS01	CF090P04SS01	CF090P05SS01	CF090P06SS01
801-900 (R)	CF090R00SS01	CF090R01SS01	CF090R02SS01	CF090R03SS01	CF090R04SS01	CF090R05SS01	CF090R06SS01
901-1000 (T)	CF090T00SS01	CF090T01SS01	CF090T02SS01	CF090T03SS01	CF090T04SS01	CF090T05SS01	CF090T06SS01
1001-1100 (V)	CF090V00SS01	CF090V01SS01	CF090V02SS01	CF090V03SS01	CF090V04SS01	CF090V05SS01	CF090V06SS01
1101-1200 (X)	CF090X00SS01	CF090X01SS01	CF090X02SS01	CF090X03SS01	CF090X04SS01	CF090X05SS01	CF090X06SS01

MAGNAFLOW® • ROOFING • CLADDING • RAINWATER

PRODUCT – Roofing/Cladding/Rainwater	BMT (mm)
Stramit® Corrugated	0.42 / 0.48
Stramit Monoclad®	0.42 / 0.48
Stramit Longspan®	0.42 / 0.48
Stramit Speed Deck Ultra®	0.42 / 0.48
Stramit CapacityPLUS™ 660	0.42 / 0.48
Stramit® Roll Top Ridge	0.55
Stramit® Valley Folded	0.55
Stramit® Flashings & Others	0.55
Stramit® Gutters	0.42
Stramit® Downpipes 100 x 50	0.55
Stramit® Downpipes 100 x 75	0.55
Stramit® Downpipes 100 x 100	0.55

RECOMMENDED END USES

MagnaFlow® paint systems have a very good colour and gloss retention and are suitable for roofing, cladding and rainwater goods. It is ideal for animal shelters, flashings, interior uses, and exterior environments where corrosion levels are moderate. It is also suitable for fencing applications.

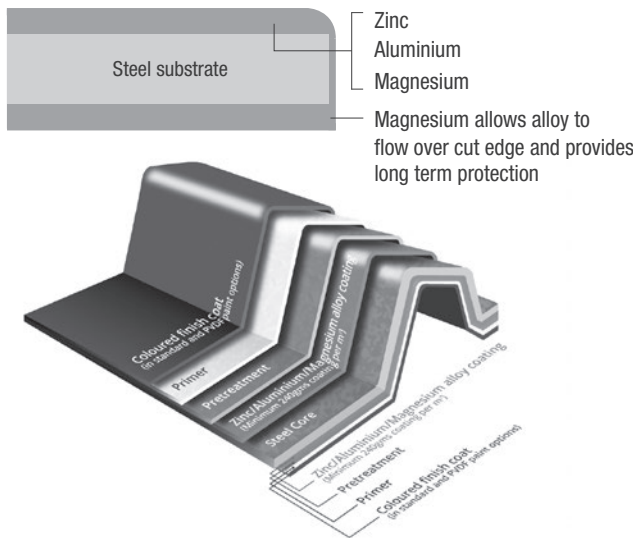
MAGNAFLOW® WARRANTIES

A range of warranties are available to support MagnaFlow® products for various exposure conditions. Please contact your local Stramit office for details.

THE MAGIC OF MAGNESIUM

All steel roofs are susceptible to the elements along cut edges however the addition of magnesium to the standard zinc/aluminium alloy in MagnaFlow® products provides superior corrosion resistance in this area. As time goes on it allows the protective metal coating to microscopically flow over the cut edge. At this point a sacrificial anticorrosive reaction takes place and a robust seal is created.

Anticorrosive reaction of MagnaFlow® products



Please refer to Sales office for lead times and availability.

MagnaFlow® sheeting is a highly durable prepainted sheet steel system suitable for use in corrosive environments for roofing, walling and rainwater products. The protective metallic coating on the base steel is a new technology in accordance with AS1397 -2011. This coating provides the added durability of the MagnaFlow® product.

Please enquire at your local Stramit office to confirm colour availability.

SUBSTRATE

The coating on the steel substrate complies with the coating classes as specified in AS 1397 – 2011: Continuous Hot Dipped Metallic Coated Steel Sheet and Strip – Coatings of Zinc, and Zinc Alloyed with Aluminium and Magnesium. The MagnaFlow® coating comprises zinc, aluminium and magnesium and delivers more durable site performance than standard zinc or Zinc/ aluminium systems. Minimum coating mass is 240gsm.

PRODUCT AVAILABILITY - MAGNAFLOW COLOURS

Product	BMT (mm)	Magnaflow Colours ZM8 ***										
		AGY	BCH	MLH	OWH	SLG	GUL	SCM	CFG	HRD	MGN	MBL
Roofing	0.42	Y	POA	Y	Y	Y	CHECK	POA	POA	POA	POA	POA
	0.48	POA	POA	Y	Y	Y	POA	POA	POA	POA	POA	POA
Fascia	0.42	Y	Y	POA	Y	Y	POA	Y	POA	POA	POA	POA
QLD Quad / 150 Half Rnd	0.42	Y	Y	POA	Y	Y	POA	POA	POA	POA	POA	POA
M Gutter	0.42	Y	Y	POA	Y	Y	POA	Y	POA	POA	POA	POA
Quad 175	0.55	POA	POA	POA	POA	POA	POA	POA	POA	POA	POA	POA
Flashings	0.55	Y	Y	Y	Y	Y	POA	POA	POA	POA	POA	POA

MAGNAFLOW COLOUR NAMES

AGY	Armour Grey	SLG	Slate Grey	HRD	Heritage Red
BCH	Birch	GUL	Gull Grey	MGN	Mist Green
MLH	Monolith	SCM	Smooth Cream	MBL	Mountain Blue
OWH	Off White	CFG	Caulfield Cream		

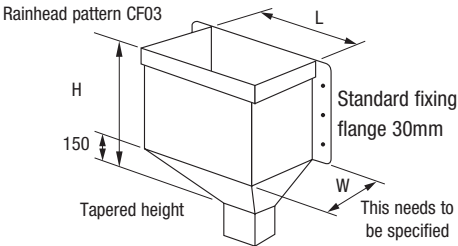
NOTE: Length Tolerance is - 0 + 15mm. Please advise if flashing length is critical.
StandardBend Tolerance is ± 2.0mm.

















































RAINWATER HEAD GUIDE

STRAMIT® CUSTOM PRODUCTS

Source your custom rainwater heads from the roofing experts. We offer you a complete range to suit any architectural style. We can manufacture rainwater heads to your specifications.



STANDARD SIZE: 400(L) x 250(W) x 350(H).
MATERIALS: Copper, Galvanised, ZINCALUME® steel, Stainless Steel, COLORBOND® steel.
For further information please contact your local Stramit branch. **Price on application.**





	01	02	03	04	05	06
CCY	 CCY01	 CCY02	 CCY03	 CCY04	 CCY05	 CCY06
CT	 CT01	 CT02	 CT03	 CT04	 CT05	 CT06
TF	 TF01	 TF02	 TF03	 TF04	 TF05	 TF06
CF	 CF01	 CF02	 CF03	 CF04	 CF05	 CF06
CCN	 CCN01	 CCN02	 CCN03	 CCN04	 CCN05	 CCN06
CI	 CI01	 CI02	 CI03	 CI04	 CI05	 CI06
TD	 TD01	 TD02	 TD03	 TD04	 TD05	 TD06
TH	 TH01	 TH02	 TH03	 TH04	 TH05	 TH06

NOTES



SUMPS

Product Sumps	Size mm	Code	Unit
Flat Bottom	Extra with fitted drop		
	200 x 200 x 100/150	SUF2020/10/15/ZA/X***	each
	300 x 300 x 100/150	SUF3030/10/15/ZA/X***	each
	400 x 400 x 100/150	SUF4040/10/15/ZA/X***	each
	500 x 500 x 100/150	SUF5050/10/15/ZA/X***	each
	600 x 600 x 100/150	SUF6060/10/15/ZA/X***	each
	700 x 700 x 100/150	SUF7070/10/15/ZA/X***	each
	800 x 800 x 100/150	SUF8080/10/15/ZA/X***	each
Made to order 72 hours lead time.			
Tapered Bottom	200 x 200 x 100/150	SUT2020/10/15/ZA/X***	each
	300 x 300 x 100/150	SUT3030/10/15/ZA/X***	each
	400 x 400 x 100/150	SUT4040/10/15/ZA/X***	each
	500 x 500 x 100/150	SUT5050/10/15/ZA/X***	each
	600 x 600 x 100/150	SUT6060/10/15/ZA/X***	each
	700 x 700 x 100/150	SUT7070/10/15/ZA/X***	each
	800 x 800 x 100/150	SUT8080/10/15/ZA/X***	each
Other sizes available upon request.			



ADJUSTABLE BOX GUTTER BRACKETS

Product Adjustable Box Gutter Brackets	Details	Code	Unit
	Suits 250-400 Box 24	BGBA1EZA	each
	Suits 400-650 Box 24	BGBA2EZA	each
	Suits 650-1000 Box 18	BGBA3EZA	each
Box Gutter Board 6.0m only	600mm width	LSGBZA6000	each
			









RAINWATER CAPS • OVERFLOWS • ROOF VENTILATION

Product Rainwater Caps/Rainheads/Overflows/Roof Ventilatio	Product Details	Code	Unit
	Chinaman's Hat ex Erskine Park (on Short pipe)	CAP100GA	each
		CAP125GA	each
		CAP150GA	each
		CAP200GA	each
		CAP250GA	each
Other sizes available through Eziform but ensure short pipe is included on request.			
Asbestos Cement Repair Sheet (super 6)		SSRSGA30	each
			
(to fit "super" and "deep 6") 3.000m galvanised stock only Overall sheet width 1016.			

DAMP COURSE LINERS

Product Damp Course Liners	Product Details	Code	Unit	Finish
Safe Trays				
Copper – Soft Soldered				
	400mm x 400mm	ST4040/05/10/055/CU	each	Copper
	500mm x 500mm	ST5050/05/10/055/CU	each	Copper
	600mm x 600mm	ST6060/05/10/055/CU	each	Copper
	700mm x 700mm	ST7070/05/10/055/CU	each	Copper
	800mm x 800mm	ST8080/05/10/055/CU	each	Copper
	Other Sizes	Please contact your Stramit Representative		
Made to order. 72 hours lead time.				
Safe Trays				
Stainless Steel 305 2B Soft Soldered				
	400mm x 400mm	ST4040/05/10/055/SS	each	S/Steel
	500mm x 500mm	ST5050/05/10/055/SS	each	S/Steel
	600mm x 600mm	ST6060/05/10/055/SS	each	S/Steel
	700mm x 700mm	ST7070/05/10/055/SS	each	S/Steel
	800mm x 800mm	ST8080/05/10/055/SS	each	S/Steel
	Other Sizes	Please contact your Stramit Representative		
Made to order. 72 hours lead time.				

RAINWATER SPECIALS

Metal Louvres	Overflows	Curved Metal Flashings	
Custom made to order Kit form or assembled			Custom made to suit any radius (Require radius and/or template)
			
			

VENTED RIDGE / FIXED METAL LOUVERS

Product	Product Details	Code	Unit
---------	-----------------	------	------



Quad Ventilated ridge Upflow open top	300/450/600/75/900/1200 mm Throat	Please contact your Stramit Representative	lin metre
Dual Ventilated Ridge Downflow Closed Top	300/450/600 mm Throat	Please contact your Stramit Representative	lin metre

Information required for quoting or ordering process:

Type of Ridge Vent: ☐ Upflow (Open Top/Quad Flow) ☐ Downflow (Closed Top/Dual Flow)

Throat size: _____mm

Colour: ☐ ZINCALUME® steel ☐ COLORBOND® steel (specify colour & finish) _____

Roof Pitch: _____degrees (zero degrees if Ridge Vent is on the slope of the roof)


Qty _____ @ _____m / Qty _____ @ _____

Qty _____ @ _____m / Qty _____ @ _____

Roofing Profile: ☐ Corrugated ☐ Monoclad ☐ Longspan ☐ Other _____

NOTE: - Stop ends included in kit
- Under certain circumstances Vented Ridge may mist
- Maximum length 8.0m
- Check your local office for lead time.

Fixed Metal Louvres	100mm Single Stage 150mm Single Stage Available in Zinc or COLORBOND® steel
---------------------	---



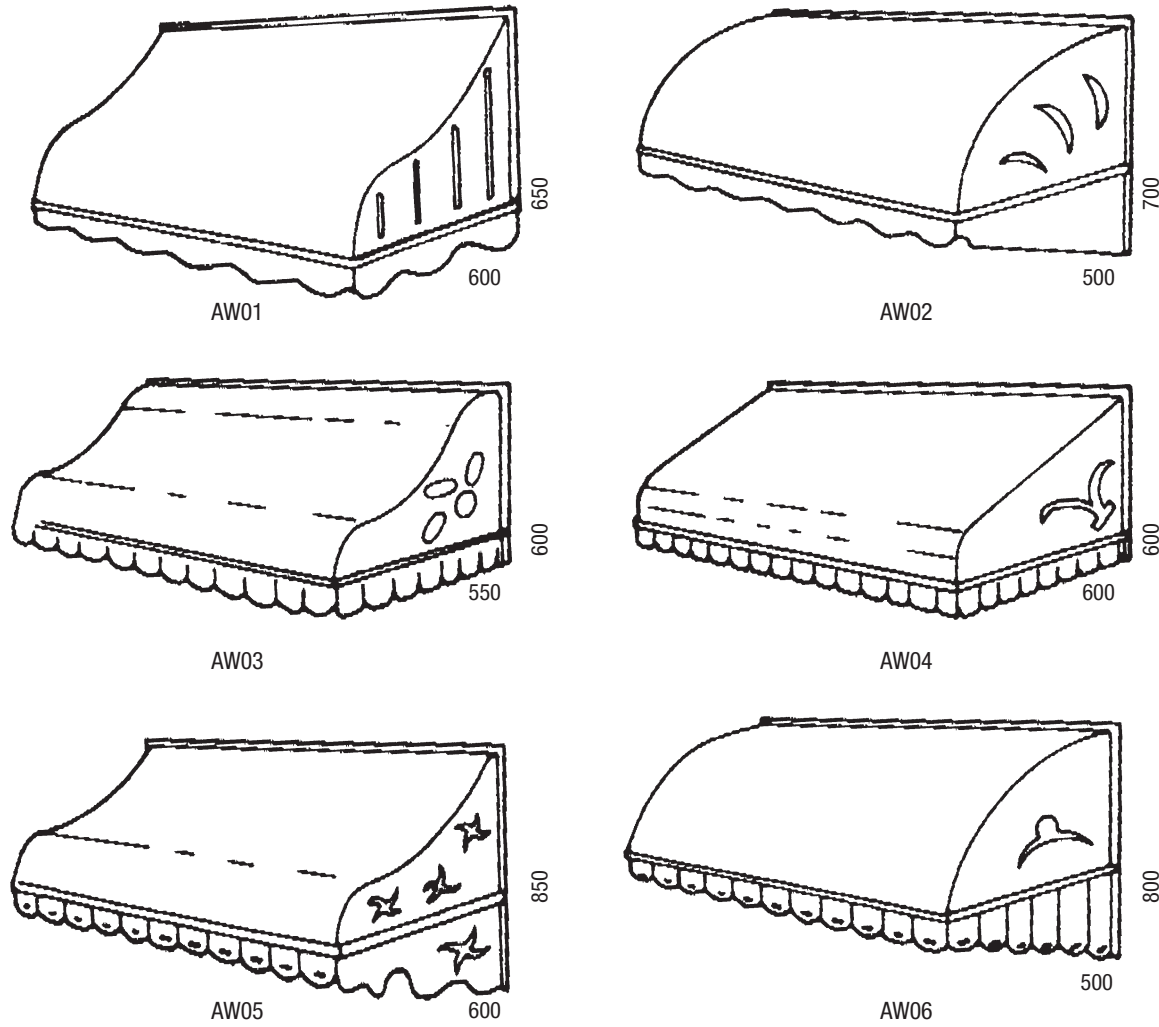
COLONIAL WINDOW AWNING

Product	Code
---------	------






Colonial Window Awning





Patterns are samples only
We can custom make to detail


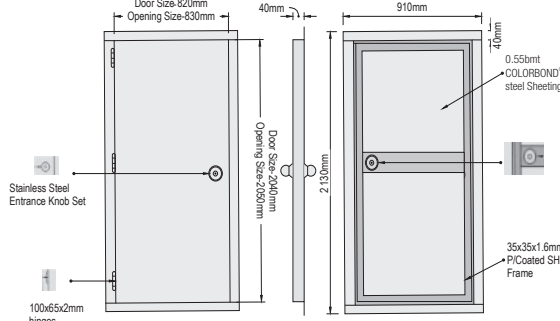
CWASPEC



NOTE: Window awnings are made to order. Check your local office for lead time.
Available in all COLORBOND® steel Colours.

BUILDER'S PRODUCTS					
Product Builder's Products	Size mm	Code	Finish	BMT mm	Unit
	Mould Edge Square 50/box	SC2323ME40GA	GA	0.40	each
	Round 250 25/box	SC2540GA	GA	0.40	each
	Round 300 25/box	SC3040GA	GA	0.40	each
  	Double sided 1.8m				
	113 x 38 x 38	ACF1133840GA18	GA	0.40	length
	150 x 38 x 38	ACF1503840GA18	GA	0.40	length
	225 x 38 x 38	ACF2253840GA18	GA	0.40	length
	Veneer 1.8m/Single sided				
	50 x 38	ACH503840GA18	GA	0.40	length
	113 x 38	ACH1133840GA18	GA	0.40	length
	150 x 38	ACH1503840GA18	GA	0.40	length
	225 x 38	ACH2253840GA18	GA	0.40	length
	75 x 38	ACH753840GA18	GA	0.40	length
	Bribie 1.8m				
75 x 16 x 16 x 32	ACB7540GA18	GA	0.40	length	
100 x 16 x 16 x 32	ACB10040GA18	GA	0.40	length	
(Internal & external corners available POA)					
Vertical Bribie					
75 x 16 x 16 x 32	ACV7540GA18	GA	0.40	length	
100 x 16 x 16 x 32	ACV10040GA18	GA	0.40	length	
Made to order - 72 hours lead time					
Vent Pipe Stays	1.8m (15mm diameter)	VSGA18	GA	0.40	length
Drip Strip	1.8m x 50mm (21 x 5 x 21mm)	DS5040GA18	GA	0.40	length
Window Flashing	1.8m				
	A B				
	38 x 40	WF3840GA18	GA	0.40	length
	38 x 50	WF3850GA18	GA	0.40	length
	38 x 75	WF3875GA18	GA	0.40	length
	75 x 113	WF75113GA18	GA	0.40	length

BUILDER'S PRODUCTS					
Product Builder's Products	Size mm	Code	Finish	BMT mm	Unit
Sparrow Proofing 	1.8m	SPGA18	GA	0.40	length
TGalvanised Metal Surrounds 	EV Surround (small) DT Surround (large)	SURMETSMGA SURMETLGGA	GA GA	0.75 0.75	each each
Builder's Strapping 	32mm x 1.2mm x 50m 32mm x 1.2mm x 30m 32mm x 1.2mm x 15m 32mm x 1.6mm x 50m 32mm x 1.6mm x 30m 38mm x 1.6mm x 50m 38mm x 1.6mm x 30m 50mm x 1.2mm x 50m 50mm x 1.5mm x 30m	BST321250 BST321230 BST321215 BST321650 BST321630 BST381650 BST381630 BST501250 BST501530	GA GA GA GA GA GA GA GA GA	1.2 1.2 1.2 1.6 1.6 1.6 1.6 1.2 1.6	roll roll roll roll roll roll roll roll roll
Galvanised Trim Angle 	38 x 38 x 1.8m 38 x 38 x 2.4m 40 x 40 x 1.2 40 x 40 x 1.5 40 x 40 x 1.9 38 x 38 x 3.0m 38 x 38 x 6.0m 40 x 40 x 6.0m 40 x 40 x 6.0m	AF3840GA18 AF3840GA24 AF40120GA AF40150GA AF40190GA AF40120GA30 AF40120GA60 AF40150GA60 AF40190GA60	GA GA GA GA GA GA GA GA GA	0.40 0.40 1.2 1.5 1.9 1.2 1.2 1.5 1.9	length length lin metre lin metre lin metre length length length length

P.A. DOOR				
Product P.A. Door	Size mm	Code	Finish	Unit
P.A. Door Standard-door only 	2040 x 820 x 40 54mm Hole Back Set 60mm	PAD2040820ZA 920mm wide PAD2040820X*** 920mm wide	ZA COL	each each
	NB: No Jamb, Hinges or Lock assembly provided. Price includes packaging.			
	Door Has A Single Skin.			
P.A. Door Deluxe 	2040 x 820 x 35mm 2040 x 820 x 35mm	PADJ2040820X*** 920mm wide PADJ2040820ZA 920mm wide	COL ZA	each each
	NB: This is a full pre-hung door including entrance set & heavy gauge outer mounting frame. Not all colours stocked.			
	NOTE: Lead time minimum 7 business days			

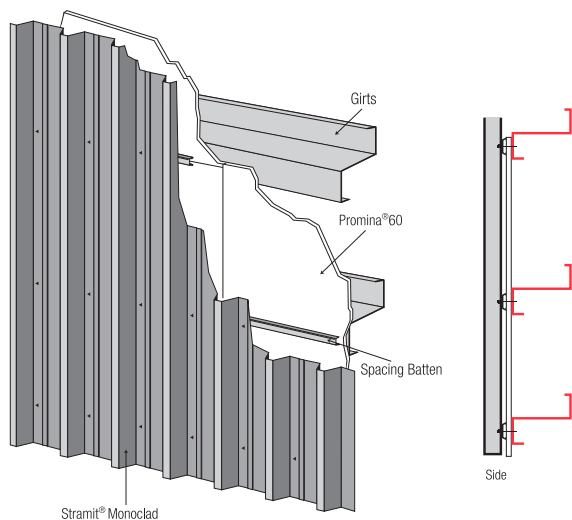
STEEL FRAMING • STRUCTURAL SECTIONS

Product Structural Sections/Flooring	Product Details	Code	Finish	BMT mm	Unit
	Stramit® Steel Framing Sections				
	TRUECORE® steel				
	75 x 32 x 7.5m stock	SBQS7512UTC7500		1.2	length
	75 x 32 cut to length	SBQS7512UTC		1.2	per metre
	75 x 32 cut to length	SBQS7510UTC		1.0	per metre
	TRUECORE® steel Nogging				
	72 x 34 x 7.5m stock	SBQN7212UTC7500		1.2	lengt
	72 x 34 cut to length	SBQN7212UTC		1.2	per metre
	72 x 34 cut to length	SBQN7210UTC		1.0	per metre
	TRUECORE® steel Plate				
	78 x 31 x 7.5m stock	SBQP7812UTC7500		1.2	length
	78 x 31 cut to length	SBQP7812UTC		1.2	per metre
	78 x 31 cut to length	SBQP7810UTC		1.0	per metre
	Note - Also available in punched. Replace 'U' in code with a 'P'.				
	Stiffened Top Plate				
	78 x 77 x 7.5m stock	SBPST16TC75		1.6	each
	NOTE: Minimum length 500mm. Maximum length 9m				
	Stramit® Top Hats				
	64 x 34 x 20 x 6 (A x B x C x D)	TH6475ZA	ZA	0.75	per metre
		TH64100ZA	ZA	1.00	per metre
		TH64120ZA	ZA	1.20	per metre
	96 x 34 x 20 x 6 (A x B x C x D)	TH9675ZA	ZA	0.75	per metre
		TH96100ZA	ZA	1.00	per metre
		TH96120ZA	ZA	1.20	per metre
	120 x 40 x 25 x 10 (A x B x C x D)	TH12070ZA*	ZA	0.70	per metre
		TH12090ZA*	ZA	0.90	per metre
		TH120120ZA*	ZA	1.20	per metre
	NOTE: Minimum length 1.5m. Maximum length 9.0m. *Purchase in from Erskine Park				
	Crestmead stock	120 x 0.90 x 7500	ZA	0.90	Length
	Rockhampton stock	96 x 0.75 x 7500	ZA	0.75	length
	length only	64 x 0.75 x 7500	ZA	0.75	length
		TH6475ZA7500	ZA	0.75	length
		TH64120ZA7500	ZA	1.20	length
	Stramit® Roof Battens				
	Stock length 6500				
	40 x 40 x 15 x 6.5m TRUECORE® steel	RB40TC6500		0.55	each
	Stramit® Roof Battens (Cyclonic)				
	40 x 40 x 15 x 7.5m	RBC40TC7500		0.75	each
	Fasteners to Truss				
	12 x 40mm Batten Zip (No Neo) (For fixing to timber or steel)	S1240HMTZIP			per box 1000
		S1240HMTZIPH			per bag 100
	12 x 20 Hex Head Tek (No Neo)	S1220HTNN4			per box 500
		S1220HTNN4H	Plain		per bag 100
	14 x 22 Hex Tek No Neo	S1422HTNN8	Plain		per box 500
	Fixing to steel	S1422HTNNH	Plain		per bag 100
	Bugle Batten Screw				
	(For fixing steel above 1.00mm thick)				
	14 x 75 T17 Bugle Batten	S1475BUGB17			per box 500
	Stramit® Ceiling Battens				
	Stock length 6100				
	20 x 30 x 10 x 6.1m TRUECORE® steel	CBTC61		0.42	each
	Safety Batten				
	20 x 30 x 10 x 6.1m	CBPR61		0.42	each

FORMWORK • ACCESSORIES

Product Structural Sections/Flooring	Product Details	Code	Finish	BMT mm	Unit
	Stramit Condeck HP®	CONHP75GA	GA	0.75	per m²
		*CONHP75P		0.75	per m²
		CONHP100GA	GA	1.00	per m²
		*CONHP100P		1.00	per m²
	NOTE: 48 hour lead time. Minimum length 800mm. Maximum length 17.0m.				
	Stramit Condeck HP® ZAM coating	CONHP100IZM		1.00	per m²
	Stramit Edgeforma				
	100mm Stramit® Edgeforma cut to length max 6.0m	CONEF100GA	GA	1.2	lin metre
	125mm Stramit® Edgeforma cut to length max 6.0m	CONEF125GA	GA	1.2	lin metre
	150mm Stramit® Edgeforma cut to length max 3.6m	CONEF150GA	GA	1.6	lin metre
	3.6m - 6.0m available upon request				
	Note: For slabs thicker than 150mm contact Stramit for technical support				
	Accessories				
	Suspended Ceiling Clips Hanger (2 part)	CONEHANG	GA		each
	10 x 16 Hex Tek	S1016HT	Plain		per 1000
	Single Span maximum span (mm)				
	slab thickness (mm)	Stramit Condeck HP® decking thickness			
		0.75mm	1.00mm		
	90	2100	2450		
	100	2040	2380		
	110	1990	2310		
	120	1940	2250		
	125	1920	2220		
	130	1900	2200		
	140	1860	2150		
	Span tables for temporary props				
	Calculated for concrete density of 2400 kg/m³, reo mass 50 kg/m³, stacked material load of 1.5kPa in pans, 100mm wide prop bearers and rib deflection limit of span/240. Maximum spans for finished composite slabs must be checked using the Stramit Condeck HP® Technical Manual or the Stramit Condeck HP™ Slab Designer software. Props or propping frames must be spaced approximately equally within the span.				
	— Cases below this line not recommended for exposed ceilings				







STRAMIT UNIGUARD™ FIRE RESISTING WALL SYSTEM



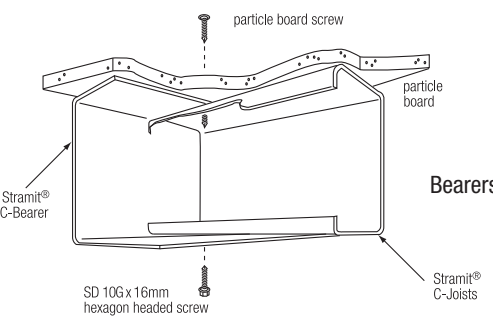
Stramit Uniguard™ Fire resisting wall system is a superior fire rated wall cladding product that combines the single layer of specialist fireboard **Promina®60** with your choice from **Stramit Monoclad®**, **Stramit Corrugated®** and **Stramit Longspan®** wall cladding products.

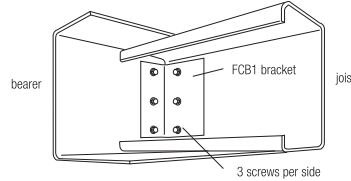

The **Stramit Uniguard™ Fire resisting wall system** is suitable for an external wall system for single storey Class 7b and 8 buildings of Type C construction as defined in the Building Code of Australia (BCA96).

Note: System must be designed and installed strictly in accordance with **Stramit Uniguard™ Fire Resisting Wall System Technical Manual**.

Product	Size mm	Code	BMT mm	Unit
Promina®60				
	15 x 2400 x 1200	PB601224		each
Allow min 72 hours for this product.				
Stramit® Safety Battens				
	Stock length 6100 20 x 30 x 10 x 6.1m	CBPR61	0.42	length
Note: Zinc-aluminium alloy Battens cannot be in contact with this system.				
Fasteners				
	10 x 45 Wing Tek (For fixing Promina®60 to girts)	S1045WNGT		per box 500
	12 x 55 Hex Head (For pan fixing cladding to purlin/girts)	S1255HT4		per box 1000
Eave Filler Strips				
	Infll Strips (top) (bottom)	MCEFSTOP MCEFSBTM	0.970m 0.970m	each each
Prima Seal				
	Prima Seal Prominaseal mastic	PBSEAL300		each

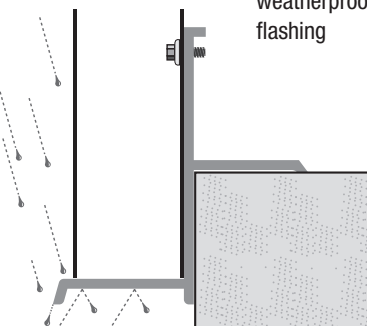
FLOORING • ACCESSORIES

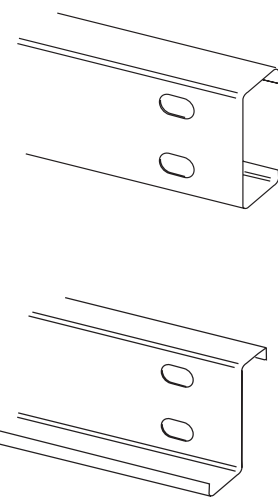



Product Flooring/Accessories	Details	Code	Depth D mm	Width W mm	Lip L mm	BMT	Unit
Stramit® Flooring – Joists							
		J11510	115	45	12	1.0	per metre
		J11515	115	45	14	1.5	per metre
		J11519	115	45	15	1.9	per metre
		J18212	182	51	13	1.2	per metre
		J18215	182	51	14	1.5	per metre
		J18219	182	51	15	1.9	per metre
		J18224	182	51	16	2.4	per metre
		J23512	235	64	11	1.2	per metre
		J23515	235	64	12	1.5	per metre
		J23519	235	64	16	1.9	per metre
		J23524	235	64	17	2.4	per metre
		J28319	283	64	17	1.9	per metre
		J28324	283	64	18	2.4	per metre
		B11519	116	52	-	1.9	per metre
		B18219	183	58	0	1.9	per metre
		B23519	236	72	0	1.9	per metre
		B28319	283	72	0	1.9	per metre
		B18224	183	58	0	2.4	per metre
		B23524	236	72	0	2.4	per metre
		B28324	283	72	0	2.4	per metre
2pm Cut Off Daily. 5 Day Lead-time.							

	Brackets	Angle Brackets	FCB1A (for B182) 130mm high	each
			FCB1B (for B235/283) 170mm high	each
		Web Brackets	FCB3A (for B182) 130mm high	each
			FCB3B (for B235/283) 180mm high	each

NOTE: A complete flooring system take off service is now available upon request. Please contact your Stramit Account Manager.

VERMASEAL

Product Flooring/Accessories	Details	Code	BMT mm	Unit
Stramit® Flooring Vermaseal				
	Vermin and weatherproof flashing	VMSEALGRY30 Grey (3 metre lengths)		length

PURLINS & GIRTS						
Product Purlins & Girts	Product Details	Code Standard	Code Exacta	BMT	Unit	
	Stramit® C & Z Purlins (Z350 Coating)	C & Z 10010 Sections	C/Z10010*	NA	1.0 per metre	
		C & Z 10012 Sections	C/Z10012*	NA	1.2 per metre	
		C & Z 10015 Sections	C/Z10015*	NA	1.5 per metre	
		C & Z 10019 Sections	C/Z10019*	NA	1.9 per metre	
		C & Z 15012 Sections	C/Z15012*	C/Z15012EX*	1.2 per metre	
		C & Z 15015 Sections	C/Z15015*	C/Z15015EX*	1.5 per metre	
		C & Z 15019 Sections	C/Z15019*	C/Z15019EX*	1.9 per metre	
		C & Z 15024 Sections	C/Z15024*	C/Z15024EX*	2.4 per metre	
		C & Z 20012 Sections	NA	C/Z20012EX*	1.2 per metre	
		C & Z 20015 Sections	C/Z20015*	C/Z20015EX*	1.5 per metre	
		C & Z 20019 Sections	C/Z20019*	C/Z20019EX*	1.9 per metre	
		C & Z 20024 Sections	C/Z20024*	C/Z20024EX*	2.4 per metre	
		C & Z 25015 Sections	NA	C/Z25015EX*	1.5 per metre	
		C & Z 25019 Sections	C/Z25019*	C/Z25019EX*	1.9 per metre	
		C & Z 25024 Sections	C/Z25024*	C/Z25024EX*	2.4 per metre	
		C & Z 30019 Sections	NA	C/Z30019EX*	1.9 per metre	
		C & Z 30024 Sections	C/Z30024*	C/Z30024EX*	2.4 per metre	
		C & Z 30030 Sections	C/Z30030*	C/Z30030EX*	3.0 per metre	
		C & Z 35019 Sections	NA	NA	1.9 per metre	
		C & Z 35024 Sections	NA	NA	2.4 per metre	
		C & Z 35030 Sections	C/Z35030*	NA	3.0 per metre	
		C & Z 40030 Sections	C/Z40030*	NA	3.0 per metre	
	NOTE: 350 & 400 series purlins minimum order is 100Lm.					
	NA - Not Available * = P (Punched) or U (Unpunched)					
	Coating supplied is Z350 galvanised. *Strictly no part cuts for Exacta's					
	Other gauges and coatings of Z450 and Z600 on special order – POA.					
	Refer Page 72 for stock lengths.					
	Please check availability at time of order. Minimum length 1.7m. Minimum part cut is 600mm Maximum length 15.2m.					
	Stramit® Purlins – Nesting Channel	(suit 100)	CH10715*	1.5	per metre	
		(suit 100)	CH10719*	1.9	per metre	
		(suit 150)	CH15719*	1.9	per metre	
		(suit 150)	CH15715*	1.5	per metre	
		(suit 150)	CH15724*	2.4	per metre	
		(suit 200)	CH20819*	1.9	per metre	
		(suit 200)	CH20824*	2.4	per metre	
		(suit 250)	CH25919*	1.9	per metre	
		(suit 250)	CH25924*	2.4	per metre	
			* = P (Punched) or U (Unpunched)			
NOTE: Tolerance for mitre cut angles is ± 1°.						
*Allow an extra day to purlin lead-time						
	Mitre Cut C100/C150/C200 & C250 up to 15°		MITRECUT2A	each		
	Mitre Cut C100/C150/C200 & C250 20°		MITRECUT2B	each		
	Mitre Cut 300/350/400		MITRECUT2C	each		
Stramit® Fascia / Eaves Purlin						
Fluted	23019 Fluted	FP23019F*		1.9	per metre	
	* P = PUNCHED U = UNPUNCHED					
	Note: Degree for top flange must be supplied.					
	Order by Friday 12pm cut off, deliver Tuesday week					
	Minimum length 1830mm					
Stramit® Eaves Purlins						
	To suit 64mm Top Hat Eaves Purlin	EP11010	Folded Galv	1.0	per metre	
	Cut to length only					
	To suit 96mm Top Hat 130mm Eaves Purlin	EP13012	Folded Galv	1.2	per metre	
	Cut to length only				48 hour lead time.	

DIMENSIONS & TYPICAL DETAILS

STRAMIT® EXACTA PURLIN DIMENSIONS

C SECTIONS					Z SECTIONS					
Section	Web Depth mm	Flange Width mm	Thickness BMT mm	Section Mass kg/m	Section	Web Depth mm	Broad Flange mm	Narrow Flange mm	Thickness BMT mm	Section Mass kg/m
C150-12EX	150	58	1.2	2.90	Z150-12EX	150	61	57	1.2	2.90
C150-15EX	150	58	1.5	3.59	Z150-15EX	150	61	57	1.5	3.59
C150-19EX	150	58	1.9	4.51	Z150-19EX	150	61	57	1.9	4.51
C150-24EX	150	58	2.4	5.67	Z150-24EX	150	61	57	2.4	5.67
C200-12EX	200	72	1.2	3.63	Z200-12EX	200	74	69	1.2	3.63
C200-15EX	200	72	1.5	4.50	Z200-15EX	200	74	69	1.5	4.50
C200-19EX	200	72	1.9	5.74	Z200-19EX	200	74	69	1.9	5.74
C200-24EX	200	72	2.4	7.21	Z200-24EX	200	74	69	2.4	7.21
C250-15EX	250	73	1.5	5.18	Z250-15EX	250	76	71	1.5	5.18
C250-19EX	250	73	1.9	6.50	Z250-19EX	250	76	71	1.9	6.50
C250-24EX	250	73	2.4	8.17	Z250-24EX	250	76	71	2.4	8.17
C300-19EX	300	93	1.9	8.04	Z300-19EX	300	98	91	1.9	8.04
C300-24EX	300	93	2.4	10.18	Z300-24EX	300	98	91	2.4	10.18
C300-30EX	300	93	3.0	12.69	Z300-30EX	300	98	91	3.0	12.69
C350-19EX	350	120	1.9	9.68	Z350-19EX	350	124	116	1.9	9.68
C350-24EX	350	120	2.4	12.20	Z350-24EX	350	124	116	2.4	12.20
C350-30EX	350	120	3.0	15.20	Z350-30EX	350	124	116	3.0	15.20

STRAMIT® PURLIN DIMENSIONS

C SECTIONS						Z SECTIONS						
Section	Web Depth mm	Flange Width mm	Lip Length mm	Thickness BMT mm	Section Mass kg/m	Section	Web Depth mm	Broad Flange mm	Narrow Flange mm	Lip Length mm	Thickness BMT mm	Section Mass kg/m
C10010	102	51	12.5	1.0	1.77	Z10010	102	53	49	12.5	1.0	1.77
C10012	102	51	13.0	1.2	2.11	Z10012	102	53	49	13.0	1.2	2.11
C10015	102	51	14.0	1.5	2.61	Z10015	102	53	49	14.0	1.5	2.61
C10019	102	51	15.0	1.9	3.29	Z10019	102	53	49	15.0	1.9	3.29
C15012	152	64	15.0	1.2	2.90	Z15012	152	65	61	15.0	1.2	2.90
C15015	152	64	16.0	1.5	3.59	Z15015	152	65	61	16.0	1.5	3.59
C15019	152	64	17.0	1.9	4.51	Z15019	152	65	61	17.0	1.9	4.51
C15024	152	64	18.5	2.4	5.67	Z15024	152	65	61	18.5	2.4	5.67
C20015	203	76	16.0	1.5	4.50	Z20015	203	79	74	16.0	1.5	4.50
C20019	203	76	19.5	1.9	5.74	Z20019	203	79	74	19.5	1.9	5.74
C20024	203	76	21.0	2.4	7.21	Z20024	203	79	74	21.0	2.4	7.21
C25019	254	76	19.0	1.9	6.50	Z25019	254	79	74	19.0	1.9	6.50
C25024	254	76	20.5	2.4	8.17	Z25024	254	79	74	20.5	2.4	8.17
C30024	300	96	28.0	2.4	10.18	Z30024	300	100	93	28.0	2.4	10.18
C30030	300	96	31.5	3.0	12.69	Z30030	300	100	93	31.5	3.0	12.69
C35030	350	125	31.0	3.0	15.20	Z35030	350	129	122	31.0	3.0	15.20
C40030NF	400	96	31.0	3.0	15.20	Z40030	400	100	93	31.0	3.0	15.20
C40030BF	400	125	31.0	3.0	16.40							

HOLE PUNCHING

Stramit® Purlins and Girts have standard 18mm x 22mm holes punched for Purlins & Exactas.

Note: All purlins 300mm and above are to have 22mm round holes to suit M16 bolts as per A.I.S.C requirements. Alternative holes and hole positions by request and must be nominated at time of order.

Stramit® Purlin/Girt	'A' mm
C/Z100	40 (A)
C/Z150	60 (A) or 70 (VIC)
C/Z200	110 (A)
C/Z250	160 (A)
C/Z300	210 (A)
C/Z350	260 (A)
C/Z400	310 (A)

'A' = A.I.S.C. > Hole Spacing

NOTE: Max number of punching operations per purlin is 30.

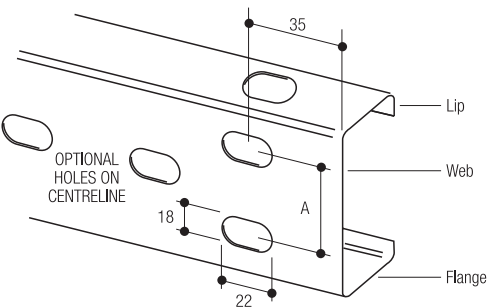
Set of web holes is one operation.

Set of Flange holes is one operation.





Centre punching is one operation.

NOTE: Custom Sections are subject to special enquiry – POA. They are cut to length, custom punched from Galvanised material.





2pm Cut Off Daily. 5 Day Lead-time.



NOTE: Max number of punching operations per purlin is 30.
Set of web holes is one operation.
Set of Flange holes is one operation.
Centre punching is one operation.


















C & Z PURLINS - DOWNTURN LIP				
Product	Product Details	Code	BMT mm	Unit
Stramit® C & Z Purlins				
Stramit® Downturn Lip C & Z Purlins (Z350 Coating)	C 10015 Sections	C10015PDT	1.5	per metre
	C 10019 Sections	C10019PDT	1.9	per metre
	C 15012 Sections	C15012PDT	1.2	per metre
	C 15015 Sections	C15015PDT	1.5	per metre
	C 15019 Sections	C15019PDT	1.9	per metre
	C 15024 Sections	C15024PDT	2.4	per metre
	C 20015 Sections	C20015PDT	1.5	per metre
	C 20019 Sections	C20019PDT	1.9	per metre
	C 20024 Sections	C20024PDT	2.4	per metre
	C 25019 Sections	C25019PDT	1.9	per metre
	C 25024 Sections	C25024PDT	2.4	per metre
	C 30024 Sections	C30024PDT	2.4	per metre
	C 30030 Sections	C30030PDT	3.0	per metre
	C 35030 Sections	C35030PDT	3.0	per metre
	C 40030 Sections	C40030PDT	3.0	per metre
	Z 10015 Sections Broad/Narrow	Z10015PBNDT	1.5	per metre
	Z 10015 Sections Narrow/Narrow	Z10015PNNDT	1.5	per metre
	Z 10019 Sections Broad/Narrow	Z10019PBNDT	1.9	per metre
	Z 10019 Sections Narrow/Narrow	Z10019PNNDT	1.9	per metre
	Z 15012 Sections Broad/Narrow	Z15012PBNDT	1.2	per metre
	Z 15012 Sections Narrow/Narrow	Z15012PNNDT	1.2	per metre
	Z 15015 Sections Broad/Narrow	Z15015PBNDT	1.5	per metre
	Z 15015 Sections Narrow/Narrow	Z15015PNNDT	1.5	per metre
	Z 15019 Sections Broad/Narrow	Z15019PBNDT	1.9	per metre
	Z 15019 Sections Narrow/Narrow	Z15019PNNDT	1.9	per metre
	Z 15024 Sections Broad/Narrow	Z15024PBNDT	2.4	per metre
	Z 15024 Sections Narrow/Narrow	Z15024PNNDT	2.4	per metre
	Z 20015 Sections Broad/Narrow	Z20015PBNDT	1.5	per metre
	Z 20015 Sections Narrow/Narrow	Z20015PNNDT	1.5	per metre
	Z 20019 Sections Broad/Narrow	Z20019PBNDT	1.9	per metre
	Z 20019 Sections Narrow/Narrow	Z20019PNNDT	1.9	per metre
	Z 20024 Sections Broad/Narrow	Z20024PBNDT	2.4	per metre
	Z 20024 Sections Narrow/Narrow	Z20024PNNDT	2.4	per metre
	Z 25019 Sections Broad/Narrow	Z25019PBNDT	1.9	per metre
	Z 25019 Sections Narrow/Narrow	Z25019PNNDT	1.9	per metre
	Z 25024 Sections Broad/Narrow	Z25024PBNDT	2.4	per metre
	Z 25024 Sections Narrow/Narrow	Z25024PNNDT	2.4	per metre
COATING NOTE: Coating supplied is Z350 galvanised. Other gauges and coatings of Z450 and Z600 are available under special order – POA. Minimum length 1.700m.				











2pm Cut Off Daily. 5 Day Lead-time.





PURLINS & GIRTS – AISC BRIDGING SYSTEM			
Product	Product Details	Code	Unit
Purlins & Girts – AISC Bridging System			
***Note: All AISC Bridging & Componentry available for 100-250 section sizes.			
	Intermediate Locator/Lock	BI100LRLK BI150LRLK BI200LRLK BI250LRLK	lin metre lin metre lin metre lin metre
	Swivel Locator/Lock	BIS100 BIS150 BIS200 BIS250	lin metre lin metre lin metre lin metre
	Intermediate Lock/Lock	BI100LKLK BI150LKLK BI200LKLK BI250LKLK	lin metre lin metre lin metre lin metre
	Swivel Lock/Lock	BIS100 BIS150 BIS200 BIS250	lin metre lin metre lin metre lin metre
	Intermediate Locator/Bolt	BI100LRBO BI150LRBO BI200LRBO BI250LRBO	lin metre lin metre lin metre lin metre
	Swivel Locator/Bolt	BIS100 BIS150 BIS200 BIS250	lin metre lin metre lin metre lin metre
	Intermediate Lock/Bolt	BI100LKBO BI150LKBO BI200LKBO BI250LKBO	lin metre lin metre lin metre lin metre
	Swivel Lock/Bolt	BIS100 BIS150 BIS200 BIS250	lin metre lin metre lin metre lin metre
	Intermediate Bolt/Bolt	BI100BOBO BI150BOBO BI200BOBO BI250BOBO	lin metre lin metre lin metre lin metre
	Swivel Bolt/Bolt	BIS100 BIS150 BIS200 BIS250	lin metre lin metre lin metre lin metre
HEAVY DUTY BRIDGING			
	250 Series	BHD250BOBO	lin metre
	300 Series	BHD300BOBO	lin metre
	350 Series	BHD350BOBO	lin metre
	400 Series	BHD350BOBO	lin metre

All Heavy Duty Bridging is priced at a minimum of 1m per length. Bridging under 1m is POA

Leadtime 8 business days for hand assembly

PURLINS & GIRTS – AISC BRIDGING SYSTEM				
Product	Product Details	Code	Unit	
Purlins & Girts – AISC Bridging System				
	Ridge Lock/Lock	BR100	lin metre	
		BR150	lin metre	
		BR200	lin metre	
		BR250	lin metre	
	Ridge Locator/Locator	BR100	lin metre	
		BR150	lin metre	
		BR200	lin metre	
		BR250	lin metre	
	Ridge Bolt/Bolt	BR100	lin metre	
		BR150	lin metre	
		BR200	lin metre	
		BR250	lin metre	
	Fascia Locator/Fascia	BF100	lin metre	
		BF150	lin metre	
		BF200	lin metre	
		BF250	lin metre	
	Fascia Lock/Fascia	BF100	lin metre	
		BF150	lin metre	
		BF200	lin metre	
		BF250	lin metre	
	Fascia Bolt/Fascia	BF100	lin metre	
		BF150	lin metre	
		BF200	lin metre	
		BF250	lin metre	
<div><div>Lock</div></div> <div><div>Locator</div></div> <div><div>Bolt</div></div>	Fascia Girt Hanger	BGHTB100	lin metre	
		BGHTB150	lin metre	
		BGHTB200	lin metre	
		BGHTB250	lin metre	
	<div><div>Lock</div></div> <div><div>Locator</div></div> <div><div>Bolt</div></div>	Barge Girt Hanger	BGHTB100	lin metre
			BGHTB150	lin metre
			BGHTB200	lin metre
			BGHTB250	lin metre
<div><div>Lock</div></div> <div><div>Locator</div></div> <div><div>Bolt</div></div>	Girt Foot	BGF100	lin metre	
		BGF150	lin metre	
		BGF200	lin metre	
		BGF250	lin metre	
PURLINS & GIRTS – GENERAL ACCESSORIES				
Accessories				
	Sag Rod 12mm	BSR12	per metre	
	Sag Rod 16mm	BSR16	per metre	
	*12mm Max length 3.0m *16mm Max length 3.0m			
	Tie Rod Angle 2.4mm BMT	BTRA	each	

PURLINS & GIRTS – GENERAL ACCESSORIES			
Product	Product Details	Code	Unit
Accessories		Bridging Ends Locator	
		BLR100	each
		BLR150	each
		BLR200	each
		BLR250	each
		Bridging Ends Lock	
		BLK100	each
		BLK150	each
		BLK200	each
		BLK250	each
		Bridging Ends Bolted	
		BB0100	each
		BB0150	each
		BB0200	each
		BB0250	each
		BB0HD300	each
		BB0HD350	each
		Bridging Fascia Brackets	
		BFB100	each
		BFB150	each
		BFB200	each
		BFB250	each
		BFBHDGA (230/300)	each
		Also available in ZAM Coating.	
	Bridging Channel 1.0mm BMT	BC69GA	lin metre
		Slotted Channel 2 Hole	BSC2HO 130mm
		3 Hole	BSC3HO 190mm
		5 Hole	BSC5HO 310mm
		General Purpose Bracket	BGPB100GA
		2.4mm BMT	BGPB150GA
			BGPB200GA
			BGPB250GA
			BGPB300GA
		Angle Connectors	BAC100
		2.4mm BMT	BAC150
			BAC200
			BAC250
			BAC300
		Clamp Plate	BCP100GA
		2.4mm BMT	BCP150GA
			BCP200GA
			BCP250GA
			BCP300GA
	Raking Girt Bracket	BRGB100	each
		Adaptor Bracket	BAB150100L/RGA
		(Right hand shown)	BAB200100L/RGA
		2.4mm BMT	BAB200150L/RGA
			BAB250100L/RGA
			BAB250150L/RGA
			BAB250200L/RGA
			BAB300100L/RGA
		Bridging Starting Clips	BSC100
			BSC150
			BSC200
			BSC250

PURLINS & GIRTS – GENERAL ACCESSORIES			
Product	Product Details	Code	Unit
	Bridging Turnbuckle		
	Bridging Turnbuckle 8mm	BTB8	each
	Bridging Turnbuckle 10mm	BTB10	each
	Purlin Cleat AISC		
	40mm centres	CL10040	each
	60mm centres	CL15060	each
	110mm centres	CL200110	each
	160mm centres	CL250160	each
	Bolts (Grade 4.6)		
	M12 x 30 N&B Flanged	PB1230ZP	each
	M16 x 33 N&B Flange	PBKS1633ZP	each
	M16 x 45 N, B & W	PB1645ZP	each
	M12 x 30 Fascia Bolt GAL	PBF1230GA	each
	M12 x 30 N&B Flanged (GR8.8)	PB1230HSZP	each
	M12 x 30 Flanged N&B Gal	PB1230GA	each
	M16 x 30 Fascia Bolt	PBF1630ZP	each
	M16 x 45 N&B Flanged	PB1645HSZP	each
	Redback Beams		
	C10015 Redback® Beam 6.100	RBC100156100	each
	C10015 Redback® Beam 7.620	RBC100157620	each
	C10015 Redback® Beam 9.000	RBC100159000	each
	C15015 Redback Beam 6.100	RBC150156100	each
	C15015 Redback Beam 7.620	RBC150157620	each
	C15015 Redback Beam 9.000	RBC150159000	each
	C20015 Redback Beam 6.100	RBC200156100	each
	C20015 RedbackBeam 7.620	RBC200157620	each
	C20015 RedbackBeam 9.000	RBC200159000	each
	Note: no technical data is available for this product.		
	Lengths: 6.100 metre, 7.620 metre, 9.000 metre.		
	Available in stock lengths only.		
	Minimum order quantity packs of 20.		

PURLINS STOCK SIZES									
	Size/Details	C Sections					Z Sections		
		6.5m	8.0m	9.0m	10.0m	12.6m	6.5m	9.0m	10m
Brisbane	10015			●			●		
	10019			●					
	15012								
	15015			●					
	15019			●				●	
	15024			●					
	20015			●					
	20019					●			
	20024			●					●
	25019								
	25024				●				
	30030								
Rockhampton	10015	●		●			●	●	
	15015	●		●			●	●	
	20015	●							
Maryborough	10019			●					
	15012								
	15015								
	15019			●					
	20019			●					

NOTE: Stock purlins are not punched.
9m stock lengths are available for next day delivery. Stock lengths over 9m are subject to truck availability.
Stock purlins cannot be cut on premises.



New high-tech coating for severe environments

Stramit Building Products now offers the next generation of steel purlin and Condeck HP product manufactured from ZAM coated steel.

ZAM® is a technologically advanced coated steel that allows new installation possibilities in corrosive environments. By replacing the need for post-galvanising, ZAM® products also lower material costs and reduce project lead times.

ZAM® coated steel offers better corrosion protection than conventional galvanised steel (around three times the design life) at a lower cost than products with comparable performance.

ZAM® products perform well in salt or marine atmospheres and are superior to galvanised steel in acid rain, sulphur dioxide or ammonia conditions. They also perform well in alkaline environments. They are appropriate for use near marine environments, in enclosed swimming pool complexes, in poultry, cattle and pig shed environments, as well as in high industrial environments.

The superior scratch resistance of ZAM® products helps corrosion resistance in applications subject to repeated wear. ZAM® coated steel is also concrete compatible, making it an ideal material for steel formwork decking products.

ZAM® is offered by Stramit Building Products with up to a 20 year warranty, subject to standard terms an conditions. Call Stramit Building Products for more information.

ZAM HIGH DURABILITY PURLINS

Product C & Z Purlins	Details	Code	kg/m	M/tonne	BMT (mm)	Unit
	C & Z 10015 Sections	C/Z10015*IZM	2.635	379	1.5	per metre
	C & Z 10019 Sections	C/Z10019*IZM	3.310	302	1.9	per metre
	C & Z 15015 Sections	C/Z15015*IZM	3.562	281	1.5	per metre
	C & Z 15019 Sections	C/Z15019*IZM	4.488	223	1.9	per metre
	C & Z 15024 Sections	C/Z15024*IZM	5.750	174	2.4	per metre
	C & Z 20015 Sections	C/Z20015*IZM	4.534	221	1.5	per metre
	C & Z 20019 Sections	C/Z20019*IZM	5.705	175	1.9	per metre
	C & Z 20024 Sections	C/Z20024*IZM	7.177	139	2.4	per metre
	C & Z 25019 Sections	C/Z25019*IZM	6.466	155	1.9	per metre
	C & Z 25024 Sections	C/Z25024*IZM	8.134	123	2.4	per metre
	C & Z 30030 Sections	C/Z30030*IZM	12.640	79	3.0	per metre

* Substitute * for P = PUNCHED U = UNPUNCHED EXP = EXACTA PUNCHED EXU = EXACTA UNPUNCHED
Check coil availability - extended lead times may apply
Other sizes and gauges may be available subject to mill lead times and quantities
Min 1.7m length
Cutback fee for lengths under 1.7m - item code is CUTBACKLTH

Purlins Ordering Available to order on approximately 3-5 days lead time subject to delivery days. No extra charge for hole punching
Notching and mitre cut charges do apply – POA. Allow 2 extra days.

ZAM Durability Statement
(Date of issue 15 June 2004)

This statement is issued to Stramit® Building Products Pty Ltd by Nisshin Steel Co., Ltd on 15 June 2004 and states the expected durability of Nisshin Steel Co., Ltd corrosion resistant hot dip coated steel sheeting product ZAM™.

Performance

The corrosion resistance of ZAM coating is a minimum 3 times that of galvanised steel sheet.
ZAM materials are made in accordance with AS 1397, purlins have a ZM350 coating and Condeck HP a ZM275 coating of protective, zinc, aluminium and magnesium. All ZAM products have the same material strength as normal product, and the normal purlin and Condeck HP load tables are valid when used with the ZAM material.

Typical Application

The superior corrosion resistance of ZAM coating means that it can replace hot dip galvanised steel.
Applications are whenever severe and corrosive environments exist: intensive farming, agricultural applications, concrete contact and coastal applications.

ZAM, the highly corrosion-resistant hot dip coated steel sheet, is

- A new hot dip coated steel that has a coating layer of zinc, aluminium 6% and magnesium 3%
- The designation “ZAM” comes from the initials of its constituent elements Zinc, Aluminium, and Magnesium.

CUSTOM SECTIONS

Stramit® Custom Sections

GENERAL

At the forefront of technology, Stramit has designed the latest in computer technology roll forming equipment. This technology allows quick and easy profile changes to be made within the production cycle. This allows the production of special purlins or other shapes designed specifically for individual projects giving the best balance in performance and economy.

SIZE RANGE

Sections can be produced within the following parameters:

Web size	100mm	–	400mm
Flange size	30mm	–	130mm
Lip size	9mm	–	35mm *
Thickness	1.0mm	–	3.0mm
Material type	G300	–	G550 #

*Zero lip (i.e. plain channels) also available.

May vary dependent upon material thickness.

MODIFIED PURLINS

Modified purlins, Z, C or plain channel, use existing strip widths. This advantage of modifying sections within the bounds of existing strip materials allows improvements in performance – either strength or deflection – with ready access to available materials.

Lead times are, particularly if standard flange sizes are used, no more than for normal purlin orders.

CUSTOM SHAPES

Designed for specific purposes, these sections may be used for a variety of applications but usually require a specific strip size, which requires extended lead times for ordering and are subject to a minimum order quantity criteria.

TOOLING

Contact your local Stramit office for cost estimates for tooling of special flange sizes and any special holes.

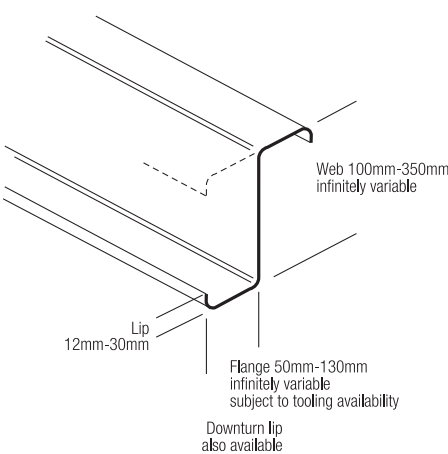
HOLES

The facility to provide special holes at almost any location is also available.

LOAD TABLES

Section properties and load tables for modified or custom profiles may be possible for larger projects by means of the latest in computer programs written for this purpose.


SIZES AVAILABLE



DOWNTURN LIP – Standard & Lapped Z
These features are available on purlin projects – POA

Custom Sections Subject to special enquiry – POA. They are cut to length, custom punched from galvanised material. Alternative materials are available upon request.

COATED PURLINS - ZAM

Product C & Z Purlins	Details	Code	kg/m	M/tonne	BMT (mm)	Unit
Stramit® C & Z Purlins (ZAM Coating) 	C & Z 10015 Sections	C/Z10015*IZM	2.635	379	1.5	per metre
	C & Z 10019 Sections	C/Z10019*IZM	3.310	302	1.9	per metre
	C & Z 15015 Sections	C/Z15015*IZM	3.562	281	1.5	per metre
	C & Z 15019 Sections	C/Z15019*IZM	4.488	223	1.9	per metre
	C & Z 15024 Sections	C/Z15024*IZM	5.750	174	2.4	per metre
	C & Z 20015 Sections	C/Z20015*IZM	4.534	221	1.5	per metre
	C & Z 20019 Sections	C/Z20019*IZM	5.705	175	1.9	per metre
	C & Z 20024 Sections	C/Z20024*IZM	7.177	139	2.4	per metre
	C & Z 25019 Sections	C/Z25019*IZM	6.466	155	1.9	per metre
	C & Z 25024 Sections	C/Z25024*IZM	8.134	123	2.4	per metre
	C & Z 30030 Sections	C/Z30030*IZM	12.640	79	3.0	per metre
	* Substitute * for P = PUNCHED U = UNPUNCHED EXP = EXACTA PUNCHED EXU = EXACTA UNPUNCHED Check coil availability - extended lead times may apply Other sizes and gauges may be available subject to mill lead times and quantities Min 1.7m length Cutback fee for lengths under 1.7m - item code is CUTBACKLTH					

ZAM - the highly corrosion-resistant alternative to hot dipped galvanising





Performance




The corrosion resistance of ZAM coating is a minimum 3 times that of galvanised steel sheet.
*Based on results from a comparison test of ZAM coating 380gsm (grams per square metre, nominal coating weight for both sides) with standard galvanised steel Z350gsm.

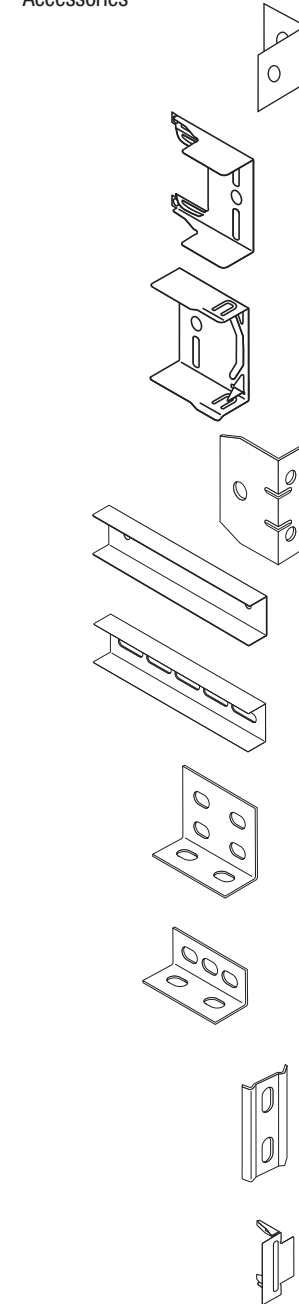
Typical Application

The superior corrosion resistance of ZAM coating means that it can replace hot dip galvanised steel.
Applications are whenever severe and corrosive environments exist: intensive farming, agricultural applications, concrete contact and coastal applications.









COATED BRIDGING - ZAM

Product Purlins & Girts – AISC Bridging System	Product Details	Code	Unit
***Note: All AISC Bridging & Componentry available for 100-250 section sizes.			
	Intermediate Locator/Lock	BI150LRLKIZM BI200LRLKIZM BI250LRLKIZM	lin metre lin metre lin metre
	Swivel Locator/Lock	BIS150IZM BIS200IZM BIS250IZM	lin metre lin metre lin metre
	Intermediate Lock/Lock	BI150LKLKIZM BI200LKLKIZM BI250LKLKIZM	lin metre lin metre lin metre
	Swivel Lock/Lock	BIS150IZM BIS200IZM BIS250IZM	lin metre lin metre lin metre
	Intermediate Locator/Bolt	BI150LRBOIZM BI200LRBOIZM BI250LRBOIZM	lin metre lin metre lin metre
	Swivel Locator/Bolt	BIS150IZM BIS200IZM BIS250IZM	lin metre lin metre lin metre
	Intermediate Lock/Bolt	BI150LKBOIZM BI200LKBOIZM BI250LKBOIZM	lin metre lin metre lin metre
	Swivel Lock/Bolt	BIS150IZM BIS200IZM BIS250IZM	lin metre lin metre lin metre
	Intermediate Bolt/Bolt	BI150BOBOIZM BI200BOBOIZM BI250BOBOIZM	lin metre lin metre lin metre
	Swivel Bolt/Bolt	BIS150IZM BIS200IZM BIS250IZM	lin metre lin metre lin metre







COATED BRIDGING - ZAM			
Product	Product Details	Code	Unit
	Fascia Locator/Fascia	BF***IZM	lin metre
	Fascia Lock/Fascia	BF***IZM	lin metre
	Fascia Bolt/Fascia	BF***IZM	lin metre
	Fascia Girt Hanger	BGHTB***IZM BGHTB***IZM BGHTB***IZM	lin metre lin metre lin metre
	Barge Girt Hanger	BGHTB***IZM	lin metre
		BGHTB***IZM BGHTB***IZM	lin metre lin metre
	Girt Foot	BGF***IZM	lin metre
		BGF***IZM	lin metre
		BGF***IZM	lin metre

COATED ACCESSORIES - ZAM			
Product	Product Details	Code	Unit
	Tie Rod Angle	BTRAIZM	each
	Bridging Ends Locator	BLR150IZM	each
		BLR200IZM	each
		BLR250IZM	each
	Bridging Ends Lock	BLK150IZM	each
		BLK200IZM	each
		BLK250IZM	each
	Bridging Ends Bolted	BB0150IZM	each
		BB0200IZM	each
		BB0250IZM	each
	Bridging Channel	BC69IZM	lin metre
	Slotted Channel 2 Hole 3 Hole 5 Hole	BSC2H0IZM	each
		BSC3H0IZM	each
		BSC5H0IZM	each
	General Purpose Bracket	BGPB150IZM	each
		BGPB200IZM	each
		BGPB250IZM	each
	Angle Connectors	BAC150IZM	each
		BAC200IZM	each
		BAC250IZM	each
	Clamp Plate	BCP150IZM	each
		BCP200IZM	each
		BCP250IZM	each
	Bridging Starting Clips	BSC150IZM	each
		BSC200IZM	each
		BSC250IZM	each
	Bridging Fascia Brackets	BFB150IZM	each
		BFB200IZM	each
		BFB250IZM	each













HOME IMPROVEMENTS FENCING • ACCESSORIES

Product	Product Details	Code	Finish	BMT mm	Unit
Infill Sheets 	Gram ColourLine Sheet				
	Sheeting 1.190	SFGLCL***1190	COL	0.35	each
	Sheeting 1.490 (To be used with Lattice for 1.800 Fence)	SFGLCL***1490	COL	0.35	each
	Sheeting 1.790	SFGLCL***1790	COL	0.35	each
	Sheeting 2.090 (To be used with Lattice for 1.800 Fence)	SFGLCL***2090	COL	0.35	each
	NB: Colours available – Caulfield Green, Heritage Red, Mist Green & Primrose				
Not a stocked item - 10 day leadtime.					
Rails Top & Bottom 	Rail Top/Bottom 2.365	SFR***2365	COL	0.90	each
	Rail Top/Bottom 3.100	SFR***3100	COL	0.90	each
NB: Colours available – Domain, Meadow, Evergreen, Red Oak, Eclipse & Bluestone					
Post 	Post 2.400	SFP***2400	COL		each
	(40 x 40) NB: Colours available – Domain, Meadow, Evergreen, Red Oak, Eclipse & Bluestone				
Panel 2.400 x 1.800 	Standard Panel includes		Panel price with Lattice (Domain only)		
	2 x Rails (2.365)		4 x Rails (2.365)		
	2 x Posts		2 x Post		
	3 x Sheets 1.790		3 x Sheets 1.490		
	14 x Screws 10x16 Hex HD		1 x Lattice 300x2355 (Domain)		
			18 x Screws 10x16 Hex HD		
Accessories 	Screws 10 x 16 Hex Hd (No Neo) (per 100 only)	S1016HTNN***4H S1016HT***4H	Colour		pack 100
	7 panels = 100 screws		Colour		pack 100
Lattice 	Lattice 300 x 2355	SFL300DOM2350	Colour		each
	NB: Available in Domain only				
Not a stocked item - 10 day leadtime.					
Corner (End) Post 	Post 2.400	SFGP50***2400	Colour		each
	50 x 50 (with cap) NB: Colours available – Domain, Meadow, Evergreen, Red Oak, Eclipse & Bluestone				
Gates To suit 1800 Fence 	Single Gate 1.800 x 900				
	each				
	includes 2 x Styles, 2 x 100x75 Butt Hinges, 1 x Long D-Latch, 2 x 50x50 Post, 1 x Rail 2.400, 1 x Sheet, 50 x 12 x 20 Hex Head				
	Double Gate 1.800 x 3000				
	each				
	includes 4 x Styles, 4 x 100x75 Butt Hinges, 1 x Long D-Latch, 1 x Drop Bolt, 2 x 50x50 Post, 2 x Rail 3.100, 4 x Sheet, 100 x 12 x 20 Hex Head.				
Not a stocked item - Allow 10 days lead time.					
Colour Conversion	Primrose (PRM) / Domain (DOM) = Classic Cream™ Caulfield Green (CFG) / Evergreen (EVG) = Cottage Green® Bluestone (BST) = Deep Ocean®				
	Heritage Red (HRD) / Red Oak (ROK) = Manor Red® Mist Green (MGN)/Meadow (MDW)=Pale Eucalypt® Eclipse (ECL) = Night Sky®				

SUNSET PATIO DECK

Product	Product Details	Code	Finish	Unit
Stramit Sunset®				
	Sunset Decking CLC/Classic Cream™ 80GL	SS42DLCLC		per m²
	Sunset Decking WIL/Classic Cream™ 80GL	SS42DL07		per m²
	Sunset Decking SUR/Dover White 80GL	SS42DL05		per m²
	Sunset Decking PPB/Paperpark® 80GL	SS42DLPPB		per m²
	Sunset Decking WDG/Classic Cream™ 80GL	SS42DL09		per m²
		CUTBACKLTH (0.5 - 1.2m)		each
To convert prices to linear metres multiply by cover of sheet (ie 0.290). Supply ex Erskine Park - 2 week lead time. **Gloss colour is on the bottom. Please confirm at time of order.				
All Product packaged for maximum protection.				
*Maximum length 9.0m.				
wonderglass	To suit Stramit Sunset® sheeting (available in opal only)	TSWGSS240PL		lin metre
				
Sunset® Foam Insert	Infill strip for Stramit Sunset® sheeting (310mm)	SSWS3787		each
				
Fibreglass Foam Insert	Infill strip for Stramit Sunset® fibreglass sheeting (290mm)	SSWS3788		each
				
Sunset® Back Channel	Available in 3 & 5.0m stock lengths only	RCSSH***30		each
		RCSSH***50		each
		RCSSZA30		each
		RCSSZA50		each
	***Available colours CLC, DVW & PPB.			
Sunset® Foam Insert for Back Channel	Available in 5.0m stock lengths only	SSBCFI5000		each
Fasteners 	10 x 16 Hex Head SDS (for fixing to steel)	S1016HT4H	Plain	per pack 100
		S1016HT4	Plain	per pack 1000
		S1016HT***4H	Colour	per pack 100
		S1016HT***4	Colour	per pack 1000

PATIO ROOF DECKING

	Details	Ordering Code	Finish	Unit
	Collar Tie Bracket 15deg	CSCTB10015GA	GA	each
	Collar Tie Bracket 15deg	CSCTB15015GA	GA	each
	Collar Tie Bracket 15deg	CSCTB20015GA	GA	each
	Collar Tie Bracket 22deg	CSCTB10022GA	GA	each
	Collar Tie Bracket 22deg	CSCTB15022GA	GA	each
	Collar Tie Bracket 22deg	CSCTB20022GA	GA	each
	Angle Bracket	CSAB100GA	GA	each
	Angle Bracket	CSAB150GA	GA	each
	Angle Bracket	CSAB200GA	GA	each
	Sunset Support Post 65 x 65 x 2.440	SSP6516GA2440	GA	each
		SSP6516***2440	LCLC/HDVW/LPPB	each
	Sunset Support Post 65 x 65 x 3.660	SSP6516GA3660	GA	each
		SSP6516***3660	LCLC/HDVW/LPPB	each
	Sunset Support Post 90 x 90 x 3.000	SSP9020GA3000	GA	each
		SSP9020***3000	LCLC/HDVW/LPPB	each
	*Posts stocked at erskine Park – 1 week leadtime. Other colours available check leadtime at time of order.			
	Free Standing Post Connector 65 x 65	SSPCFS6565GA	GA	each
	Free Standing Post Connector 90 x 90	SSPCFS9090GA	GA	each
	Post Connector 65 x 65	SSPC6565GA	GA	each
	Post Connector 90 x 90	SSPC9090GA	GA	each
	Post Skirt 65 x 65	SSPS6565		each
	Post Skirt 90 x 90	SSPS9090		each
	Sunset Box Gutter Support Bracket	SSBGSB		each
	Patio Rafter Bracket	PRBGA		each
	Sunset Box Bracket	SSRBAL	ALUM	each

TAUREAN® RESIDENTIAL AND COMMERCIAL ROLLER DOOR COLOURS

COLORBOND® STEEL COLOUR NAMES							
BAS	Basalt®	HED	Headland®	PPB	Paperbark®		
CLC	Classic Cream™	IST	Ironstone®	SHG	Shale Grey™		
CTG	Cottage Green®	JAS	Jasper®	SUR	Surfmist®		
COV	Cove®	MGV	Mangrove®	TRN	Terrain®		
DOC	Deep Ocean®	MNR	Manor Red®	WAL	Wallaby®		
DUN	Dune®	MON	Monument®	WDG	Woodland Grey®		
EVH	Evening Haze®	NTS	Night Sky®	WIL	Wilderness®		
GLY	Gully®	PEC	Pale Eucalypt®	WSP	Windspray®		
MATT		COLOURGRAIN		SELF-STORAGE / MINI WAREHOUSE			
BAS	Basalt® Matt	CAO	Caoba®	DVW	Dover White	MAN	Mandarin Orange
MON	Monument® Matt	CCE	Classic Cedar®	LAZ	Lazurite Blue	POP	Poppy Red
SUR	Surfmist® Matt						

TAUREAN RESIDENTIAL ROLLER DOORS

DOMESTIC PR1ME SERIES 'A' AND 'AA', WINDLOCK AND WINDSTRONG

Product Details	Discount Group Code	Finish	Code	Unit
Series A - Standard, WindLock or WindStrong options	7T	ZA	RDAZA	Ea
		COL	RDAhhCOLwww	Ea
Series AA - Standard, WindLock or WindStrong options	7V	ZA	RDAAZA	Ea
		COL	RDAAhCOLwww	Ea

Available in ZINCALUME® steel, COLORBOND® steel, COLORBOND® steel Matt and Colourgrain Domestic Roller Door										
Series 'A' Doors (curtain width in mm)							Series 'AA' Doors (curtain width in mm)			
	Width									
Height (mm)	750 to 1550	1551 to 1850	1851 to 2550	2551 to 2800	2801 to 3100	3101 to 3430	3431 to 3750	3750 to 4350	4351 to 5100	5101 to 5400
1200										
2200										^
2500										^
2800										
3100										

^ Not available in WindLock

ORDERS TO BE PLACED AS DOOR SIZE (not opening width)

To calculate curtain width, add to opening width -

- 50mm for Series A
- 100mm for WindLock option
- 100mm for Series AA
- 110mm for WindStrong option

TAUREAN LIGHT INDUSTRIAL ROLLER DOORS

LIGHT INDUSTRIAL COMMANDO SERIES 'B', WINDLOCK AND WINDSTRONG

Product Details	Discount Group Code	Finish	Code	Unit
Series 'B' - Standard, WindLock or WindStrong options	7R	ZA	RDBZA	Ea
		COL	RDBCOL	Ea

Available in ZINCALUME® steel, COLORBOND® steel, COLORBOND® steel Matt and Colourgrain Domestic Roller Door										
Series 'B' Doors (curtain width in mm)										
	Width									
Height (mm)	750 to 1550	1551 to 1850	1851 to 2550	2551 to 2800	2801 to 3100	3101 to 3430	3431 to 3750	3750 to 4350	4351 to 5100	5101 to 5400
2200										
2500										
2800										
3100										
3500										
3900										
4300										
4600										
5100										

ORDERS TO BE PLACED AS DOOR SIZE (not opening width)

To calculate curtain width, add to opening width -

- 50mm for Series A
- 100mm for WindLock option
- 100mm for Series AA
- 110mm for WindStrong option

Product Details	Code	Unit
Planetary Gear Chain System	RDPLANETGEAR	Ea

It is recommended that Planetary Gear Chain operating system be fitted to doors in shaded areas. Planetary Gear system MUST NOT be used when an electric operator is fitted.

TAUREAN® RESIDENTIAL ROLLER DOORS - KEY POINTS

PR1ME SERIES ROLLER DOOR WINDLOCK CONFIGURATION				
Wind Classification (AS/NZS 4505-2012)		MAXIMUM DOOR WIDTH (mm)		
Classification	Ultimate Wind Pressure	0 - 3650	3651 - 5015	5016 - 5100
N1	< 4.0m: inwards 0.69kPa outwards -0.73kPa > 4.0m: inwards 0.69kPa outwards -0.63kPa	WindLock door 2.2 clips/m		
N2	< 4.0m: inwards 0.95kPa outwards -1.02kPa > 4.0m: inwards 0.95kPa outwards -0.87kPa			
N3	< 4.0m: inwards 1.49kPa outwards -1.59kPa > 4.0m: inwards 1.49kPa outwards -1.37kPa	3.9 clips/m		

Wind Classification N3		MAXIMUM DOOR WIDTH (mm)		
		0 - 3650	3651 - 5015	5016 - 5100
ABUTMENT FORCES (kN/m)	Fy INWARDS	5.5	6.2	8.2
	Fx INWARDS	17.7	22.7	29.4
	Fy OUTWARDS	9.5	9.5	11.2
	Fx OUTWARDS	26.3	30.7	40.7

Taurean Doors Systems certify that this door meets the ultimate wind pressure ratings of Australian Standard AS/NZS 4505 and is fit for purpose in Regions A and B (non-cyclonic areas) of Australia when installed according to instructions. See taureands.com.au for details.

Tapers for Sloping Floors – Roller Doors

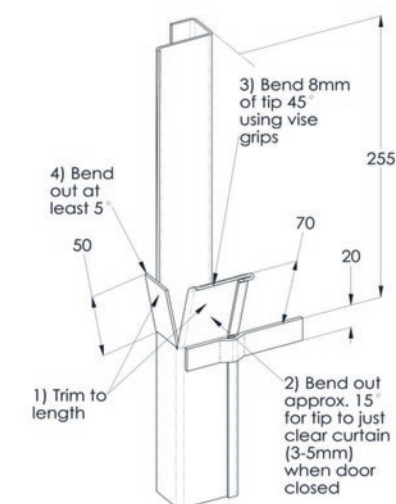
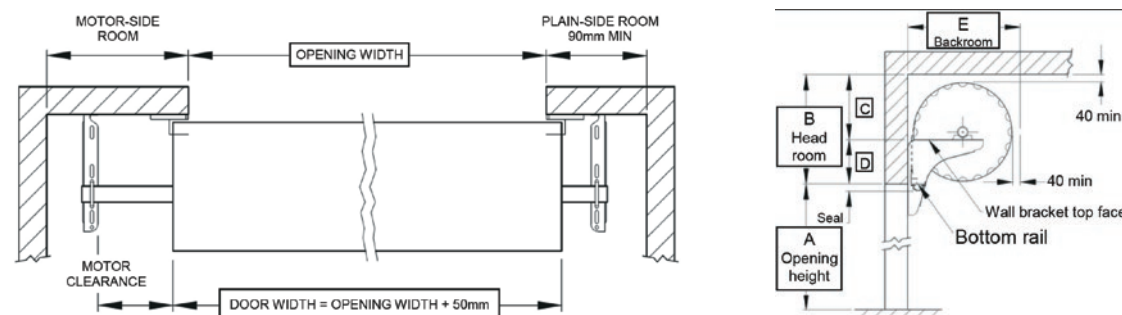
Taurean Pr1me Series Roller Doors are available with tapered curtains to suit floors with a slope across the door opening. Minimum and maximum taper sizes apply, please contact Taurean Customer Service on 1800 778 658 or via customerservice@taureands.com.au for further information.

WINDSTRONG™ Roller Door - Domestic and Medium General Purpose (20,000 cycles) AUSTRALIAN STANDARD 4505 COMPLIANT

Steel Guide Track	ULTIMATE CYCLONIC WIND PRESSURE								Aluminium Guide Track	ULTIMATE CYCLONIC WIND PRESSURE							
Door Width (mm)	2550	2800	3100	3430	3750	4350	5100	5400	Door Width (mm)	s 2550	2800	3100	3430	3750	4350	5100	5400
Inwards Ultimate Wind Pressure Rating (kPa)	6.27	5.76	5.20	4.64	4.17	3.46	2.89	2.76	Inwards Ultimate Wind Pressure Rating (kPa)	6.79	6.13	5.53	4.91	4.38	3.53	2.75	2.53
Outwards Ultimate Wind Pressure rating (kPa)	7.24	6.91	6.50	6.02	5.54	4.59	3.31	2.77	Outwards Ultimate Wind Pressure rating (kPa)	6.79	6.13	5.53	4.91	4.38	3.53	2.75	2.53
Domestic Cyclonic Region Ratings (door width mm)	C4 up to 2770	C3 up to 3660		C2 up to 5100		C2 up to 5400			Domestic Cyclonic Region Ratings (door width mm)	C3 up to 3430			C2 up to 4550		C1 up to 5400		

TAUREAN ROLLER DOOR INSTALLATION

For further information please refer to the Installation Guides at www.taureands.com.au or contact Customer Service 1800 778 658.



Mounting Room - Series A					
Table 1: Mounting Room (mm)					
A	B	C	D	E	
1200	430	265	165	450	
2200	440	270	170	475	
2500	455	275	180	495	
2800	485	295	190	505	
3100	495	300	195	515	

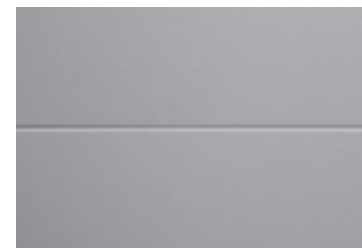
Mounting Room - Series B					
Table 1: Mounting Room (mm)					
A	B	C	D	E	
2200	440	270	170	485	
2500	455	275	180	505	
2800	485	295	190	515	
3100	495	300	195	525	
3900	515	310	205	545	
4600	550	325	225	575	
5100	560	330	230	585	

Mounting Room - Series AA					
Table 1: Mounting Room (mm)					
A	B	C	D	E	
1200	430	265	165	460	
2200	440	270	170	485	
2500	455	275	180	505	
2800	485	295	190	515	
3100	495	300	195	525	

Mounting Room - NovaTaur Commercial					
Table 1: Mounting Room (mm)					
A	B	C	D	E	
2500	485	290	195	500	
3100	520	310	210	540	
3400	520	310	210	540	
4300	555	330	225	575	
5100	585	345	240	610	

Mounting Room - NovaTaur Residential					
Table 1: Mounting Room (mm)					
A	B	C	D	E	
2500	455	290	165	450	

TAUREAN® RESIDENTIAL SECTIONAL DOORS - CLASSIC RANGE



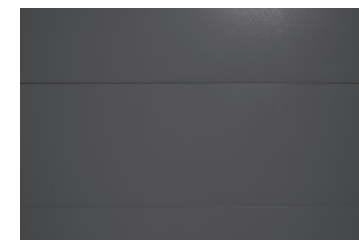
Linea: Grooved / Lined



Tempo: Pressed Squares



Western: Pressed Rectangles



Silk: Flat Panels

AVAILABLE IN COLORBOND® STEEL, WOODGRAIN TIMBERGRAIN & WOODGRAIN POWDERCOATED COLOURS												
		WIDTH										
Height	# Panels	1820 to 2500	2501 to 2800	2801 to 3200	3201 to 3700	3701 to 4150	4151 to 4450	4451 to 4740	4741 to 4950	4951 to 5510	5511 to 5930	5931 to 6050
1920, 1940, 1960, 1980, 2000, 2020, 2040, 2060, 2080, 2100, 2120, 2140, 2160, 2180	4											
2200, 2225, 2250, 2275	5											
2300, 2325, 2350, 2375, 2400, 2425, 2450	5											
2475, 2500, 2525, 2550, 2575, 2600, 2625, 2650, 2675, 2700, 2725	5											
2760, 2790, 2820, 2850, 2880, 2910, 2940, 2970, 3000	6											

Tapers for Sloping Floors – Classic Sectional Doors

Taurean Classic Sectional Doors are available with a tapered bottom panel to suit floors with a slope across the door opening. Minimum and maximum taper sizes apply, please contact Taurean Customer Service on 1800 778 658 or via customerservice@taureands.com.au for further information.

LOW HEADROOM KIT- FRONT MOUNTED ONLY - MINIMUM HEADROOM 2200mm

Product Details	Length	Code	Unit
SD Track Pair LHR 2.591	2591	SDTPRLHRGA2591	Ea
SD Track Pair LHR 2.895	2895	SDTPRLHRGA2895	Ea
SD Track Pair LHR 3.200	3200	SDTPRLHRGA3200	Ea
SD Track Kit Bag LHR		SDTKITBLHR	Ea

Please refer to the Taurean website (www.taureands.com.au) or contact Taurean Door Systems Customer Service on 1800 778 658 for assistance.

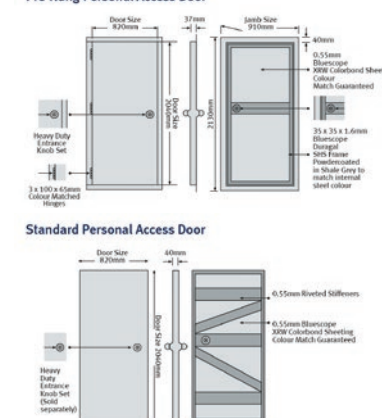
TAUREAN® NOVATAUR ROLLER DOORS



Product Details	Code	Unit
Planetary Gear Chain System It is recommended that Planetary Gear Chain operating system be fitted to doors in shaded areas. Planetary Gear system MUST NOT be used when an electric operator is fitted.	RDPLANETGEAR	Ea

Packaging Product Details	Code	Unit
Cardboard Box up to 3430 door width	RDCHRGPACK9	Ea
Cardboard Box up to 3710 door width	RDCHRGPACK10	Ea
Cardboard Box up to 4930 door width	RDCHRGPACK19	Ea
Enviropack 1 single layer cardboard outer up to 3430mm door width	RDCHRGPACK15	Ea
Enviropack 1 single layer cardboard outer up to 3431 - 5400mm door width	RDCHRGPACK16	Ea
Enviropack 2 double layer cardboard outer up to 3430mm door width	RDCHRGPACK17	Ea
Enviropack 2 double layer cardboard outer up to 3431 - 5400mm door width	RDCHRGPACK18	Ea
Metal Wrap Packaging per lineal metre	RDCHRGPACK2	Ea

Pre-Hung Personal Access Door



Pre Hung PA Door 2040 x 820mm	ZA COL	PADJ2040820ZA PADJ2040820X***	Ea Ea
Pre Hung PA Door 2040 x 920mm	ZA COL	PADJ2040920ZA PADJ2040920X***	Ea Ea
Personal Access (PA) Door 2040 x 820mm	ZA COL	PAD2040820ZA PAD2040820X***	Ea Ea
Personal Access (PA) Door 2040 x 920mm	ZA COL	PAD2040920ZA PAD2040920X***	Ea Ea

- Taurean Door Systems standard offer is a single skin metal clad door:
2040mm high x 820mm wide x 37mm thick and 2040mm high x 920mm wide x 37mm thick
- Metal cladding is 0.55mm thick COLORBOND® steel
- Outward swing is standard
- Heavy duty Knob/Knob Lockset as standard (with Pre-Hung Door only), Lever/Knob available upon request
- Chrome cabin hook supplied as standard (with Pre-Hung Door only)
- Pre-Hung version comes with three, 100 x 65 x 2mm high quality colour matched hinges

Please refer to the Taurean web-site (www.taureands.com.au) or contact Taurean Door Systems Customer Service on 1800 778 658 for assistance.

TAUREAN® ROLLER DOOR ACCESSORIES

Product Details	Code	Unit
Roller Door Openers - Merlin		
RD Motor SilntDrv Elite 855BBU..... Max door area = 18m² Max door weight = 120kg	RDMOTORSE855BB	Ea
RD Motor SilntDrv Elite 855MYQ..... Max door area = 18m² Max door weight = 120kg	RDMOTORSE855MQ	Ea
RD Motor SilntDrv Essen 655MYQ Max door area = 16.5m² Max door weight = 100kg	RDMOTORSS655MQ	Ea
RD Motor Weather Drive 550EVO Max door area = 15m² Max door weight = 100kg IP 34 Housing Rating	RDMOTORWD55EVO	Ea
Roller Door Openers - GRIFCO		
RD Motor eDrive 2.0 (ML5102 Kit) Left Hand..... Max door area with 150mm drum = 36m² Max door area 200mm drum = 50m²	RDMOTORED20KL	Ea
RD Motor eDrive 2.0 (ML5102 Kit) Right Hand Max door area with 150mm drum = 36m² Max door area 200mm drum = 50m²	RDMOTORED20KR	Ea
Grifco LR-Drive (GLD-RDO) Max door area Standard = 28m² Max door area WindLocked = 22m² Max door weight = 270kg	RDMOTOR1300LRD	Ea
Sectional Door Operators - MERLIN		
SD Motor ComElite 105BBU.....	SDMOTCE105BB	Ea
SD Motor ComElite 105MYQ	SDMOTCE105MQ	Ea
SD Motor ComEssen 65MYQ	SDMOTCS65MQ	Ea
SD Motor ComUlt 3800MYQ.....	SDMOTCU3800MQ	Ea
SD Motor ComExt 125 2.4C MYQ	SDMOTCX125C24	Ea
SD Motor ComExt 125 2.4R BBU.....	SDMOTCX125X24B	Ea
SD Motor ComExt 125 3.0R BBU.....	SDMOTCX125X30B	Ea
SD Motor Whisper Drive 3850EVO	SDMOTWD3850EVO	Ea
Operator Accessories		
RD Merlin Evercharge Standby Power Unit.....	RDMERECSPU	Ea
Merlin Battery Backup Kit - Suitable for residential roller & sectional door operators.....	RDMOTORBBU	Ea
RD Merlin handset 3 button Chl.....	RDMERHS3B3C	E
RD Merlin handset Mini 3 button transmitter.....	RDMERHSM3B3C	Ea
4 Button Hand Transmitter.....	RDMERHSM4B52	Ea
RD Merlin Keyed Cable Release Steel	RDMERCABRELKSF	Ea
RD Merlin Keypad Wireless S2.0.....	RDMERKPWS2	Ea
RD Merlin Connect Bundle MYQ	RDMERCONBMYQ	Ea
RD Merlin Remote Light LED MYQ	RDMERLEDMYQ	Ea
Wall Mount Wireless TrioCode	RDGDOHSWMW	Ea
TrioCode Wireless Keypad	RDGDOKPW	Ea

Please refer to the Taurean website (www.taureands.com.au) or contact Taurean Door Systems Customer Service on 1800 778 658 for assistance.

TAUREAN® PRODUCT WARRANTY

Stramit Corporation Pty Limited Roller Door Warranty and Exclusion of Liability Statement

This Warranty is given by:
Stramit Corporation Pty Limited trading as Taurean Door Systems (Taurean)
1051 Nudgee Road, Banyo QLD 4014
Phone: (03) 9721 8366 | Email: customerservice@taureands.com.au | Website: www.taureands.com.au

On Taurean® roller door kits (Product) for a twelve-month period from the date of purchase of the Product, against defects which is subject to the matters set out below (Warranty).

The Warranty is in addition to your rights and remedies that may be available to consumers under the Australian Consumer Law. If you are a consumer, as defined under the Australian Consumer Law, our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

- This Warranty applies only where:
- The purchaser seeking to rely on the Warranty presents proof of purchase to confirm the date of purchase of the Product;
 - If the Product has been installed, an authorised Taurean Door reseller or professional roller door installer (Authorised Installer) performed the installation; and
 - Taurean determines, in its absolute discretion, that the Product has a defect covered by this Warranty.

- Your Product Warranty does not apply to any defect, loss or damage arising through or caused directly or indirectly by, or as a result of:
- Fair wear and tear (e.g. working seals in the inlet and outlet valves, scratching from cleaning, paint rubs or scuffing on the internal wash coat finish or external painted finish etc.);
 - Any defects or deterioration of timber, including drying, after installation of the Product;
 - Any weakening, cracking, deterioration, or collapse of the structure or surface, during installation or use, to which the Product is (or is intended to be) affixed;
 - Incorrect storage or handling of the Product after delivery;
 - Failure to properly install, use or maintain the Product, or to follow any instructions or guidelines for installation, use or maintenance of the Product, including carrying out regular servicing or preventative maintenance;
 - The continued use or operation of the Product after any defect becomes apparent, or would have become apparent to a reasonably prudent operator or user;
 - Installation, adjustment or use of the Product, other than by Taurean or an Authorised Installer;
 - Attempted or completed modifications or repairs to the Product carried out by a person who is not authorised by Taurean to carry out such modifications or repairs;
 - The use of the Product, within 800 metres of the sea or other body of water of equivalent or greater salt concentration or in an area subject to chemical or industrial fall out, or otherwise than for any application specified on a quote or order form, price book or catalogue issued by Taurean; or
 - Any accident or act of God.

- To make a valid claim under this Warranty, a person must submit a claim in writing to Taurean at the abovementioned address within twelve months from the date of purchase of the Product. The claim must include:
- A copy of this Warranty;
 - A description and evidence of (e.g. photo) how the Product is defective;
 - The date on which the person making the claim discovered the defect;
 - Proof of the date of purchase of the Product in the form of an invoice or receipt; and
 - If the Product has been installed, proof of the date of installation of the Product in the form of an invoice or receipt from an Authorised Installer.

Where a valid Warranty claim is made in accordance with clause 6 above, Taurean will investigate the claim, and requires reasonable and adequate access to Products, to undertake its investigation. If a Warranty service call finds that your Product does not have a genuine manufacturing defect, or the claim is resolved by a regular service (that comes under the responsibility of the purchaser) Taurean reserves the right to charge you a service fee.

To the fullest extent permitted by law, Taurean expressly excludes all conditions, warranties and undertakings in relation to the Products except as set out in this document.

- To the fullest extent permitted by law, and subject to and without limiting your consumer rights under the Australian Consumer Law, Taurean expressly limits its liability under this Warranty and under any other statutory guarantee imposed at law to, at its absolute discretion:
- Replacing or repairing the Product;
 - The supply of an equivalent Product; or
 - The payment of the cost of the Product, or of repairing the Product, or of acquiring an equivalent Product.

This Warranty is not transferrable, and only applies to the original purchaser. Wherever the Product is sold by any person other than Taurean, such person has no authority whatsoever from Taurean to give any express warranty or guarantee on any Taurean producy in addition to this Warranty.

Customer Account No		SALES ORDER FORM						Order Type		CO Number		
Customer O/N:		Date Ordered	Date Required	Your Ref	Our Ref	Contact Method	Contact No	Time	Receipt No (cash sale)			
Customer Name		Delivery to Suburb:		SITE / STORE		Special (del spec) Instructions:						
		Street Address:										
AGREEMENT REF NO:		SITE TIME / VEHICLE TYPE				SITE ACCESS: GOOD/FAIR/BAD						
QUOTE REF NO:		MAP REF:				UNLOADING METHOD:						
No. Whs	Line Type	Description	Product Code	Qty	Length	Bundle No.	Mark No.	R/B	LM/M²	Price	%	Value
1												
2												
3												
4												
5												
6												
7												
8												
9												
10												
11												
12												
13												
14												
15 FREIGHT												
16 MIN. ORDER QUANTITY S/CHARGE												
17		TOTAL										

NOTES

Site Delivery Instruction Form

Customer Name :

Site Phone Number :

Site Contact Number :

U. B. D. Map Ref :

What is the nearest cross street / landmark :

Site Contact Name :

U. B. D. Map Ref :



1. SITE IS:

☐ HOUSE

☐ COMMERCIAL

☐ INDUSTRIAL

2. DELIVERY SURFACE IS:

☐ BITUMEN

☐ GRAVEL

☐ DIRT / GRASS

3. DOES RAIN AFFECT ACCESS TO PROPERTY

☐ YES

☐ NO

4. DOES THE SITE HAVE SEMI TRAILER ACCESS

☐ YES

☐ NO

5. IS A HI-AB REQUIRED

☐ YES

☐ NO

PLEASE NOTE, SOME DELIVERIES WILL BE DONE WITH A SEMI TRAILER WHICH AT A MINIMUM WILL BE 16 METRES LONG, 2.6 METRES WIDE AND MAY WEIGH UP TO 30 TONNES GROSS. WHILST HEAVY TRANSPORT VEHICLES SUCH AS CEMENT AGITATOR TRUCKS ETC. MAY BE ABLE TO GET ONTO ALL BUILDING SITES, DUE TO THE LENGTH AND DESIGN OF STRAMIT’S DELIVERY VEHICLES THESE UNITS ARE SOMETIMES RESTRICTED IN THEIR TRAVEL ONCE OFF THE ROAD.

“Sketch map to Site”

FOR FURTHER TRANSPORT OR SITE INQUIRIES, PLEASE CONTACT YOUR LOCAL STRAMIT BRANCH



Purlins/Girts

Customer

Project

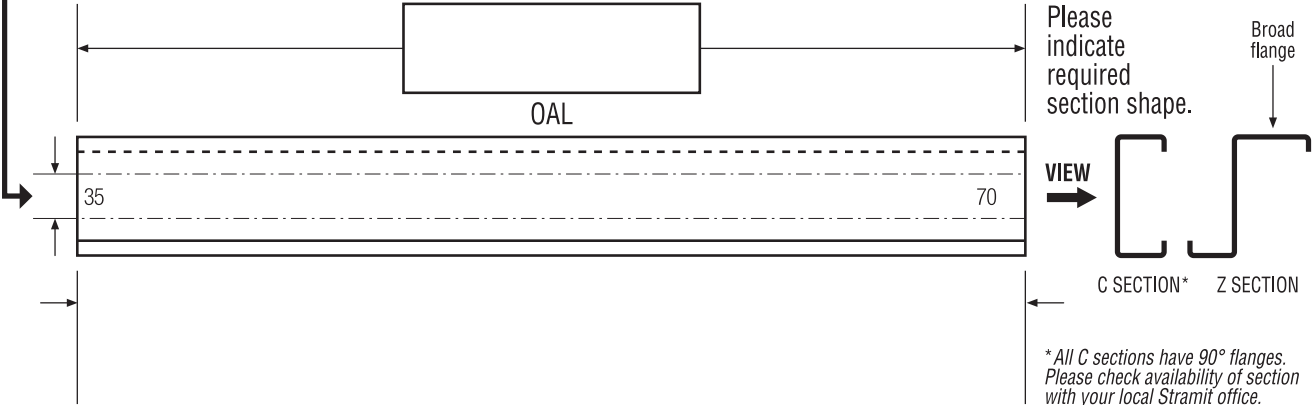
Delivery address

Page of

Order no.

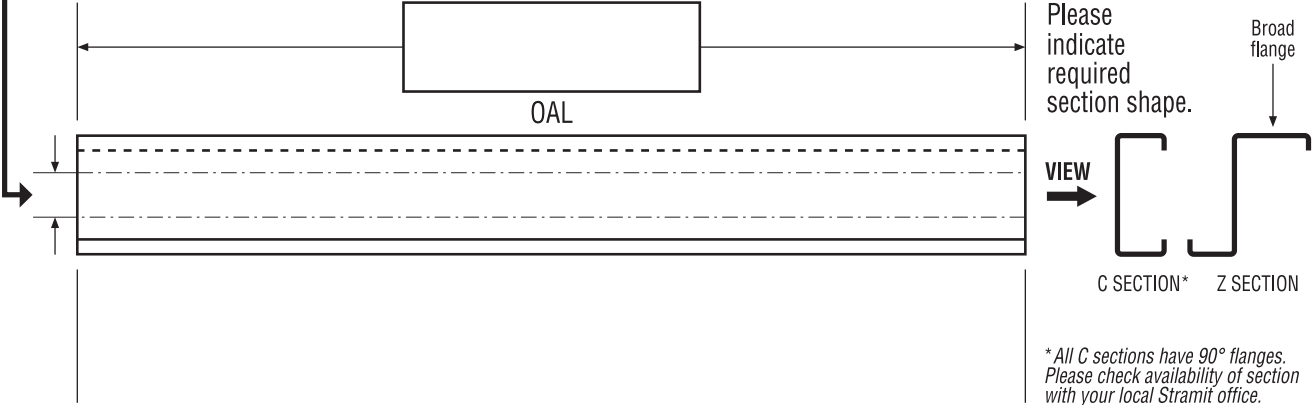
Delivery date

SECTION SIZE		NO. REQUIRED				MARK NO.			ELEVATION	
		As drawn								
COATING CLASS		Opp. hand								
NOMINATE HOLE CENTRES	Section size	100	150	200	250	300	350			
	Hole Centre	40	60	110	160	210	210			



Indicate web and flange holes and dimensions from hole to hole. Standard holes: 22mm.

SECTION SIZE		NO. REQUIRED				MARK NO.			ELEVATION	
		As drawn								
COATING CLASS		Opp. hand								
NOMINATE HOLE CENTRES	Section size	100	150	200	250	300	350			
	Hole Centre	40	60	110	160	210	210			



Indicate web and flange holes and dimensions from hole to hole. Standard holes: 18 x 22mm.









Accessories


Customer _____
Project _____
Delivery address _____

Page of

Order no.

Delivery date

STARTER CLIP  Starter (BSC)	PURLIN SIZE	NO. REQ.	GENERAL PURPOSE BRACKET  (BGPB) A = approx. purlin flange width	PURLIN SIZE	NO. REQ.
ANGLE CONNECTOR  (BAC)	PURLIN SIZE	NO. REQ.	CLAMP PLATE  Clamp Plate (BCP)	PURLIN SIZE	NO. REQ.
RAKING GIRT BRACKET  (BRGB)	PURLIN SIZE	NO. REQ.	CLAMP PLATE  Clamp Plate (BCP)	PURLIN SIZE	NO. REQ.

	BOLTS			FASCIA BOLTS	
	M12 x 30 Flange G4.6	M16 x 45 B/N/W/ G4.6	M16 x 45 B/N/W G8.8	M12 x 30 B/N/W G4.6	M16 x 30 B/N/W G4.6
NO. REQ'D					

Note: Please check bolt availablitiy with your local Stramit office.

























Bridging – Up the slope

Customer _____
Project _____
Delivery address _____

Page of

Order no.

Delivery date

INTERMEDIATE BRIDGING  Locator / Bolt Part No. BILB  Locator / Lock Part No. BILC  Lock / Bolt Part No. BICB  Lock / Lock Part No. BICC  Bolted / Bolted Part No. BIBB <small>Note: For Swivel Intermediate Bridging add 'S' to Part Number</small>	PART NO.	PURLIN SIZE	NO. REQ.	PURLIN CTRS	MARK NO.
RIDGE BRIDGING  Part No. BRC  Part No. BRL  Part No. BRB	PART NO.	PURLIN SIZE	NO. REQ.	PURLIN CTRS	MARK NO.
GIRT STOOL/FOOT  Lock Part No. BGFC  Locator Part No. BGFL  Bolt Part No. BGFB	PART NO.	PURLIN SIZE	NO. REQ.	PURLIN CTRS	MARK NO.
FASCIA BRIDGING  Locator Part No. BFL*  Lock Part No. BFC*  Bolt Part No. BFB*  Roof Pitch <small>Fascia Size* 100 150 200 230 250 260 Select Fascia Purlin size and include in Part No.</small>	PART NO.	PURLIN SIZE	NO. REQ.	PURLIN CTRS	MARK NO.
GIRT HANGER  Fascia Part No. BGHFL  Barge Part No. BGHBL  Locator Part No. BGHBL  Lock Part No. BGHFC  Bolt Part No. BGHFB  Locator Part No. BGHBC  Bolt Part No. BGHBB	PART NO.	PURLIN SIZE	NO. REQ.	PURLIN CTRS	MARK NO.



PRODUCT & SERVICE GUIDE 2024 (EFFECTIVE MARCH 2024 SUPERSEDES OCTOBER 2020)

TERMS & CONDITIONS OF SALE

View our latest Terms and Conditions of Sale here: <https://www.stramit.com.au/terms-and-conditions/>

